



ConTEXT

comenzile

RO

ConTEXT

comenzile

ro / română

13 septembrie 2018

<pre> \AfterPar {...} * BEFEHL </pre>
<pre> \Alphabeticnumerals {...} * NUMMER </pre>
<pre> \AMSTEX </pre>
<pre> \AmSTeX </pre>
<pre> \And </pre>
<pre> \abjadnaivenumerals {...} * NUMMER </pre>
<pre> \abjadnodotnumerals {...} * NUMMER </pre>
<pre> \abjadnumerals {...} * NUMMER </pre>
<pre> \activatespacehandler {...} * on dezactivat da fixat </pre>
<pre> \acute {...} * CHARACTER </pre>
<pre> \adaptcollector [...¹] [...,²...²,...] 1 NAME OPT 2 inherits: \setupcollector </pre>
<pre> \adapteazaaspect [...¹,...] [...,²...²,...] 1 NUMMER OPT 2 inaltime = max DIMENSION linii = NUMMER </pre>
<pre> \adaptfontfeature [...¹] [...,²...²,...] 1 NAME 2 inherits: \definefontfeature </pre>
<pre> \adaptpapersize [...¹,...] [...,²...²,...] 1 inherits: \seteazadimensiunihartie^{OPT} 2 inherits: \seteazadimensiunihartie </pre>
<pre> \addfeature [...[*]] * NAME </pre>
<pre> \addfeature {...[*]} * NAME </pre>
<pre> \addfontpath [...[*],...] * PATH </pre>
<pre> \addtocommalist {...¹} \²... 1 TEXT 2 CSNAME </pre>

<p><code>\addtoJSreamble {¹.} {².}</code></p> <p>1 NAME 2 CONTENT</p>
<p><code>\addvalue {¹.} {².}</code></p> <p>1 NAME 2 TEXT</p>
<p><code>\adubuffer [...,*...]</code></p> <p>* BUFFER <small>OPT</small></p>
<p><code>\getBUFFER</code></p>
<p><code>\adumarcaje [¹.] [².] [³.]</code></p> <p>1 BESCHRIFTUNG <small>OPT</small> <small>OPT</small> 2 pagina NAME 3 primul ultim curent precedent urmatorul sus subsol implicit ambele tot first:nocheck last:nocheck previous:nocheck next:nocheck top:nocheck bottom:nocheck</p>
<p><code>\afiseazaaspect [...,*...]</code></p> <p>* pt bp cm mm dd cc pc <small>OPT</small> nc sp in</p>
<p><code>\afiseazaculoare [...]</code></p> <p>* COLOR</p>
<p><code>\afiseazafonttext [...,*...]</code></p> <p>* inherits: \seteazafonttext</p>
<p><code>\afiseazagrid [...,*...]</code></p> <p>* reset subsol sus ni^{OPT}funul tot linii incadrat nonumber dreapta stanga extern coloane</p>
<p><code>\afiseazagrupculoare [¹.] [...²;...]</code></p> <p>1 NAME <small>OPT</small> 2 orizontal vertical numar valoare nume</p>
<p><code>\afiseazamakeup [...]</code></p> <p>* marcaj tot boxes linii^{OPT} glyph fontkern hbox vbox vtop kern glue penalty strut whatsit simple simplehbox simplevbox simplevtop user math italic origin reset</p>
<p><code>\afiseazamediufonttext [...,*...]</code></p> <p>* inherits: \seteazafonttext</p>
<p><code>\afiseazapaleta [¹.] [...²;...]</code></p> <p>1 NAME <small>OPT</small> 2 orizontal vertical numar valoare nume</p>
<p><code>\afiseazarama [...¹;...] [...²;...]</code></p> <p>1 sus antet text subsol^{OPT} <small>OPT</small> 2 bordurastanga marginestanga text marginedreapta borduradreapta</p>
<p><code>\afiseazasetari [...,*...]</code></p> <p>* pt bp cm mm dd cc pc <small>OPT</small> nc sp in</p>
<p><code>\afiseazasetsimboluri [...]</code></p> <p>* NAME</p>
<p><code>\afiseazastruts</code></p>

<p><code>\afiseazatiparire [...¹,...] [...²,...] [...³,...,...]</code></p> <p>1 inherits: \seteazadimensiunihartie <small>OPT</small> <small>OPT</small></p> <p>2 inherits: \seteazadimensiunihartie</p> <p>3 inherits: \seteazaaspect</p>
<p><code>\aftersplitstring ... \at ... \to \...</code></p> <p>1 TEXT</p> <p>2 TEXT</p> <p>3 CSNAME</p>
<p><code>\aftertestandsplitstring ... \at ... \to \...</code></p> <p>1 TEXT</p> <p>2 TEXT</p> <p>3 CSNAME</p>
<p><code>\aldin</code></p>
<p><code>\aldininclinat</code></p>
<p><code>\aldinitalic</code></p>
<p><code>\alignbottom</code></p>
<p><code>\aligned [...¹,...] {...²}</code></p> <p>1 stanga centru dreapta sus subsol linie l c r m t b g</p> <p>2 CONTENT</p>
<p><code>\alignedbox [...¹,...] \...² {...³}</code></p> <p>1 stanga centru dreapta sus subsol linie l c r m t b g</p> <p>2 CSNAME</p> <p>3 CONTENT</p>
<p><code>\alignedline {...¹} {...²} {...³}</code></p> <p>1 stanga dreapta centru flushleft flushright center max intern extern innermargin outermargin inneredge outeredge spatuspate cutspace marginestanga marginedreapta bordurastanga borduradreapta</p> <p>2 stanga dreapta centru flushleft flushright center max intern extern innermargin outermargin inneredge outeredge spatuspate cutspace marginestanga marginedreapta bordurastanga borduradreapta</p> <p>3 CONTENT</p>
<p><code>\alignhere</code></p>
<p><code>\alignmentcharacter</code></p>
<p><code>\aliniatcentru {...}</code></p> <p>* CONTENT</p>
<p><code>\aliniatdreapta {...}</code></p> <p>* CONTENT</p>
<p><code>\aliniatstanga {...}</code></p> <p>* CONTENT</p>
<p><code>\allinputpaths</code></p>
<p><code>\alphabeticnumerals {...}</code></p> <p>* NUMMER</p>

`\alwayscitation [...1...][...2]`

1 referinta = REFERENCE^{OPT}
alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
authoryear
inainte = BEFEHL
dupa = BEFEHL
stanga = BEFEHL
dreapta = BEFEHL
inherits: \setupbtx
2 REFERENCE

`\alwayscitation [...1...][...2]`

1 implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear
2 REFERENCE

`\alwayscitation [...1...][...2...]`

1 referinta = REFERENCE
alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
authoryear
inainte = BEFEHL
dupa = BEFEHL
stanga = BEFEHL
dreapta = BEFEHL
inherits: \setupbtx
2 KEY = VALUE

`\alwayscite [...1...][...2]`

1 referinta = REFERENCE
alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
authoryear
inainte = BEFEHL
dupa = BEFEHL
stanga = BEFEHL
dreapta = BEFEHL
inherits: \setupbtx
2 REFERENCE

`\alwayscite [...1...][...2]`

1 implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear
2 REFERENCE

`\alwayscite [...1...][...2...]`

1 referinta = REFERENCE
alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
authoryear
inainte = BEFEHL
dupa = BEFEHL
stanga = BEFEHL
dreapta = BEFEHL
inherits: \setupbtx
2 KEY = VALUE

`\ampersand`

`\anchor [...1...][...2...][...3...]{...4}`

1 NAME
2 inherits: \setuplayer
3 inherits: \setuplayerinherits: \setezainconjurat
4 CONTENT

`\appendetoks ... \to \...2`

1 BEFEHL
2 CSNAME

`\appendgvalue {...1}{...2}`

1 NAME
2 BEFEHL

`\appendtocommalist {...} \dots`

1 TEXT
2 CSNAME

`\appendtoks ... \to \dots`

1 BEFEHL
2 CSNAME

`\appendtoksonce ... \to \dots`

1 BEFEHL
2 CSNAME

`\appendvalue {...} {...}`

1 NAME
2 BEFEHL

`\apply {...} {...}`

1 CONTENT
2 CONTENT

`\applyalternativestyle {...}`

* NAME

`\applyprocessor {...} {...}`

1 NAME
2 CONTENT

`\applytocharacters \dots {...}`

1 CSNAME
2 TEXT

`\applytofirstcharacter \dots {...}`

1 CSNAME
2 TEXT

`\applytosplitstringchar \dots {...}`

1 CSNAME
2 TEXT

`\applytosplitstringcharspaced \dots {...}`

1 CSNAME
2 TEXT

`\applytosplitstringline \dots {...}`

1 CSNAME
2 TEXT

`\applytosplitstringlinespaced \dots {...}`

1 CSNAME
2 TEXT

`\applytosplitstringword \dots {...}`

1 CSNAME
2 TEXT

`\applytosplitstringwordspaced \dots {...}`

1 CSNAME
2 TEXT

<pre> \applytowords \¹..² {³..} 1 CSNAME 2 TEXT </pre>
<pre> \arabicdecimals {¹..} * NUMBER </pre>
<pre> \arabicexnumerals {¹..} * NUMBER </pre>
<pre> \arabicnumerals {¹..} * NUMBER </pre>
<pre> \arg {¹..} * CONTENT </pre>
<pre> \asciistr {¹..} * CONTENT </pre>
<pre> \ascundeblocuri [...¹;²...] [...²;³...] 1 NAME 2 NAME </pre>
<pre> \assignfadimension {¹..} \²..³ {⁴..} {⁵..} 1 mic mediu mare niciunul DIMENSION 2 CSNAME 3 DIMENSION 4 DIMENSION 5 DIMENSION </pre>
<pre> \assigndimen \¹..² {³..} 1 CSNAME 2 DIMENSION </pre>
<pre> \assigndimension {¹..} \²..³ {⁴..} {⁵..} 1 [-+]mic [-+]mediu [-+]mare niciunul DIMENSION 2 CSNAME 3 DIMENSION 4 DIMENSION 5 DIMENSION </pre>
<pre> \assignifempty \¹..² {³..} 1 CSNAME 2 BEFEHL </pre>
<pre> \assigntranslation [...¹;²...] \to \³.. 1 SPRACHE = TEXT 2 CSNAME </pre>
<pre> \assignvalue {¹..} \²..³ {⁴..} {⁵..} 1 mic mediu mare TEXT 2 CSNAME 3 BEFEHL 4 BEFEHL 5 BEFEHL </pre>
<pre> \assignwidth {¹..} \²..³ {⁴..} 1 ajustat broad DIMENSION 2 CSNAME 3 TEXT 4 DIMENSION </pre>

`\assumelongusagecs \1 {2}`

- 1 CSNAME
- 2 CONTENT

`\astype {*}`

- * CONTENT

`\ATTACHMENT [1] [2...]`

- 1 NAME OPT
 - 2 inherits: \setupattachment
- instances: attachment

`\attachment [1] [2...]`

- 1 NAME OPT
- 2 inherits: \setupattachment

`\autocap {*}`

- * TEXT

`\autodirhbox 1 {2}`

- 1 TEXT OPT
- 2 CONTENT

`\autodirvbox 1 {2}`

- 1 TEXT OPT
- 2 CONTENT

`\autodirvtop 1 {2}`

- 1 TEXT OPT
- 2 CONTENT

`\autoinsertnextspace`

`\autointegral {1} {2} {3}`

- 1 TEXT
- 2 TEXT
- 3 TEXT

`\automathematics {*}`

- * CONTENT

`\autosetups {*...}`

- * NAME

`\autostarttext ... \autostoptext`

`\availablehsize`

`\averagecharwidth`

`\BeforePar {*}`

- * BEFEHL

`\Big *`

- * CHARACTER

`\Bigg *`

- * CHARACTER

`\overbars {...}`
* CONTENT

`\overstrike {...}`
* CONTENT

`\overstrikes {...}`
* CONTENT

`\underbar {...}`
* CONTENT

`\underbars {...}`
* CONTENT

`\underdash {...}`
* CONTENT

`\underdashes {...}`
* CONTENT

`\underdot {...}`
* CONTENT

`\underdots {...}`
* CONTENT

`\underrandom {...}`
* CONTENT

`\underrandoms {...}`
* CONTENT

`\understrike {...}`
* CONTENT

`\understrikes {...}`
* CONTENT

`\basegrid [...,.*=.,...]`
* nx = NUMMER
ny = NUMBER
dx = NUMBER
dy = NUMBER
factor = NUMBER
scala = NUMBER
xstep = NUMBER
ystep = NUMBER
offset = DIMENSION
xoffset = DIMENSION
yoffset = DIMENSION
aliniere = centru
unitate = cm mm in pc pt bp
stil = STYLE BEFEHL
culoare = COLOR
culoarerigla = COLOR
grosimerigla = DIMENSION

`\baselinebottom`

<pre>\baselineleftbox {...} * CONTENT</pre>
<pre>\baselinemiddlebox {...} * CONTENT</pre>
<pre>\baselinerrightbox {...} * CONTENT</pre>
<pre>\bordermatrix {...} * CONTENT</pre>
<pre>\bbox {...} * CONTENT</pre>
<pre>\beforesplitstring ¹. \at ². \to \³. 1 TEXT 2 TEXT 3 CSNAME</pre>
<pre>\beforetestandsplitstring ¹. \at ². \to \³. 1 TEXT 2 TEXT 3 CSNAME</pre>
<pre>\beginBLOCK [...*...] ... \endBLOCK * + - NAME OPT</pre>
<pre>\beginhbox ... \endhbox</pre>
<pre>\beginofshapebox ... \endofshapebox</pre>
<pre>\beginvbox ... \endvbox</pre>
<pre>\beginvtop ... \endvtop</pre>
<pre>\begstrut ... \endstrut</pre>
<pre>\bigbodyfont</pre>
<pre>\bigg ... * CHARACTER</pre>
<pre>\bigger</pre>
<pre>\biggl ... * CHARACTER</pre>
<pre>\biggm ... * CHARACTER</pre>
<pre>\biggr ... * CHARACTER</pre>
<pre>\bigl ... * CHARACTER</pre>

<pre>\bigm ... * CHARACTER</pre>
<pre>\bigr ... * CHARACTER</pre>
<pre>\bigskip</pre>
<pre>\bitmapimage [...,\frac{1}{...},...] {...} 1 culoare = rgb cmyk gri latime = DIMENSION inaltime = DIMENSION x = NUMMER y = NUMMER 2 NUMMER</pre>
<pre>\blanc [...,*...] * preferinta^{OP}aceasipagina max fortat enable dezactivat faraalb impachetat inapot overlay totdeauna weak strong implicit inainte intre dupa fixat flexibil niciunul mic mediu mare linie jumatatelinie quarterline formula alb inaltime adancime standard NUMMER*mic NUMMER*mediu NUMMER*mare NUMMER*linie NUMMER*jumatatelinie NUMMER*quarterline NUMMER*formula NUMMER*alb NUMMER*inaltime NUMMER*adancime category:NUMMER order:NUMMER penalty:NUMMER DIMENSION NAME</pre>
<pre>\blap {...} * CONTENT</pre>
<pre>\bleed [...,\frac{1}{...},...] {...} 1 inherits: \setupbleeding 2 CONTENT</pre>
<pre>\bleedheight</pre>
<pre>\bleedwidth</pre>
<pre>\blockligatures [...,*...] * TEXT</pre>
<pre>\blocksynctexfile [...,*...] * FILE</pre>
<pre>\bodyfontenvironmentlist</pre>
<pre>\bodyfontsize</pre>
<pre>\boldface</pre>
<pre>\booleanmodevalue {...} * NAME</pre>
<pre>\bordermatrix {...} * CONTENT</pre>
<pre>\bottombox {...} * CONTENT</pre>
<pre>\bottomleftbox {...} * CONTENT</pre>

<pre> \bottomrightbox {...} * CONTENT </pre>
<pre> \boxcursor </pre>
<pre> \boxmarker {...} {...} 1 NAME 2 NUMBER </pre>
<pre> \boxofsize \... .. ²... .. ³{...} 1 CSNAME 2 DIMENSION 3 CONTENT </pre>
<pre> \boxreference [...¹,...] \... ²{...} 1 REFERENCE 2 CSNAME 3 CONTENT </pre>
<pre> \bpar ... \epar </pre>
<pre> \bpos {...} * NAME </pre>
<pre> \breakhere </pre>
<pre> \breve {...} * CHARACTER </pre>
<pre> \bTABLE [...[*],...] ... \eTABLE * inherits: \setupTABLE </pre>
<pre> \bTABLEbody [...[*],...] ... \eTABLEbody * inherits: \setupTABLE </pre>
<pre> \bTABLEfoot [...[*],...] ... \eTABLEfoot * inherits: \setupTABLE </pre>
<pre> \bTABLEhead [...[*],...] ... \eTABLEhead * inherits: \setupTABLE </pre>
<pre> \bTABLEnext [...[*],...] ... \eTABLEnext * inherits: \setupTABLE </pre>
<pre> \bTC [...[*],...] ... \eTC * inherits: \BTD </pre>
<pre> \bTD [...[*],...] ... \eTD * nx =^{OPT}NUMBER ny = NUMBER nc = NUMBER nr = NUMBER n = NUMBER m = NUMBER actiune = REFERENCE inherits: \setupTABLE </pre>
<pre> \bTDs [...] ... \eTDs * NAME </pre>

<pre> \bTH [...*\dots] ... \eTH * inherits: \PTD </pre>
<pre> \bTN [...*\dots] ... \eTN * inherits: \PTD </pre>
<pre> \bTR [...*\dots] ... \eTR * inherits: \PTSetupTABLE </pre>
<pre> \bTRs [...] ... \eTRs * NAME </pre>
<pre> \bTX [...*\dots] ... \eTX * inherits: \PTD </pre>
<pre> \bTY [...*\dots] ... \eTY * inherits: \PTSetupTABLE </pre>
<pre> \btxabbreviatedjournal {...} * NAME </pre>
<pre> \btxaddjournal [...¹] [...²] 1 NAME 2 NAME </pre>
<pre> \btxalwayscitation [...¹\dots] [...²] 1 referinta = REFERENCE ^{OPT} alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear inainte = BEFEHL dupa = BEFEHL stanga = BEFEHL dreapta = BEFEHL inherits: \setupbtx 2 REFERENCE </pre>
<pre> \btxalwayscitation [...¹] [...²] 1 implicit category entry^{OPT}short pagina num textnum an index tag keywords autor authoryears authornum authoryear 2 REFERENCE </pre>
<pre> \btxalwayscitation [...¹\dots] [...²\dots] 1 referinta = REFERENCE alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear inainte = BEFEHL dupa = BEFEHL stanga = BEFEHL dreapta = BEFEHL inherits: \setupbtx 2 KEY = VALUE </pre>
<pre> \btxauthorfield {...} * initials firstnames vons surnames juniors </pre>
<pre> \btxdetail {...} * address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an yearfiled NAME </pre>
<pre> \btxdirect {...} * address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an yearfiled NAME </pre>

`\btxdoif {..} {..}`

1 address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language
luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an
yearfiled NAME
2 TRUE

`\btxdoifcombiinlistelse {...} {...} {...} {...}`

1 NAME
2 NAME
3 TRUE
4 FALSE

`\btxdoifelse {...} {...} {...}`

1 address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language
luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an
yearfiled NAME
2 TRUE
3 FALSE

`\btxdoifelsecombiinlist {...} {...} {...} {...}`

1 NAME
2 NAME
3 TRUE
4 FALSE

`\btxdoifelsesameasprevious {...} {...} {...}`

1 address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language
luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an
yearfiled NAME
2 TRUE
3 FALSE

`\btxdoifelsesameaspreviouschecked {...} {...} {...} {...}`

1 totdeauna douafete
2 address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language
luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an
yearfiled NAME
3 TRUE
4 FALSE

`\btxdoifelseuservariable {...} {...} {...}`

1 KEY
2 TRUE
3 FALSE

`\btxdoifnot {...} {...}`

1 address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language
luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an
yearfiled NAME
2 TRUE

`\btxdoifsameaspreviouscheckedelse {...} {...} {...} {...}`

1 totdeauna douafete
2 address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language
luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an
yearfiled NAME
3 TRUE
4 FALSE

`\btxdoifsameaspreviouselse {...} {...} {...}`

1 address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language
luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an
yearfiled NAME
2 TRUE
3 FALSE

`\btxdfusevariableelse {1..} {2..} {3..}`

- 1 KEY
- 2 TRUE
- 3 FALSE

`\btexpandedjournal {*..}`

- * NAME

`\btfield {*..}`

- * address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an yearfiled NAME

`\btfieldname {*..}`

- * address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an yearfiled NAME

`\btfieldtype {*..}`

- * address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an yearfiled NAME

`\btfirstofrange {*..}`

- * volume pages

`\btflush {*..}`

- * address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an yearfiled NAME

`\btflushauthor [1..] {2..}`

- 1 num normal normalshort inverted invertedshort
- 2 autor editor

`\btflushauthorinverted {*..}`

- * autor editor

`\btflushauthorinvertedshort {*..}`

- * autor editor

`\btflushauthorname {*..}`

- * autor editor

`\btflushauthornormal {*..}`

- * autor editor

`\btflushauthornormalshort {*..}`

- * autor editor

`\btflushsuffix`

`\btfoundname {*..}`

- * address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an yearfiled NAME

`\btfoundtype {*..}`

- * address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an yearfiled NAME

`\btXHiddencitation [...]`

* REFERENCE

`\btXhybridcite [...1...2...] [...]`

1 referinta = REFERENCE^{OPT}
alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
authoryear
inainte = BEFEHL
dupa = BEFEHL
stanga = BEFEHL
dreapta = BEFEHL
inherits: \setupbtX
2 REFERENCE

`\btXhybridcite [...1] [...2]`

1 implicit category entry^{OPT} short pagina num textnum an index tag keywords autor authoryears authornum authoryear
2 REFERENCE

`\btXhybridcite {...}`

* REFERENCE

`\btXhybridcite [...1...2...] [...2...2...]`

1 referinta = REFERENCE
alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
authoryear
inainte = BEFEHL
dupa = BEFEHL
stanga = BEFEHL
dreapta = BEFEHL
inherits: \setupbtX
2 KEY = VALUE

`\btXlistcitation [...1...2...] [...]`

1 referinta = REFERENCE^{OPT}
alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
authoryear
inainte = BEFEHL
dupa = BEFEHL
stanga = BEFEHL
dreapta = BEFEHL
inherits: \setupbtX
2 REFERENCE

`\btXlistcitation [...1] [...2]`

1 implicit category entry^{OPT} short pagina num textnum an index tag keywords autor authoryears authornum authoryear
2 REFERENCE

`\btXlistcitation [...1...2...] [...2...2...]`

1 referinta = REFERENCE
alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
authoryear
inainte = BEFEHL
dupa = BEFEHL
stanga = BEFEHL
dreapta = BEFEHL
inherits: \setupbtX
2 KEY = VALUE

`\btXloadjournalist [...]`

* FILE

`\btXoneorange {...} {...} {...}`

1 volume pages
2 TRUE
3 FALSE

`\btxremapauthor [...] [...]`

- 1 TEXT
- 2 TEXT

`\btxsavejournalist [...]`

- * FILE

`\btxsetup {...}`

- * NAME

`\btxsingularorplural {...} {...} {...}`

- 1 editor producer director
- 2 TRUE
- 3 FALSE

`\btxsingularplural {...} {...} {...}`

- 1 editor producer director
- 2 TRUE
- 3 FALSE

`\btxtextcitation [..., ...1..., ...] [...]`

- 1 referinta = REFERENCE OPT
alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
authoryear
inainte = BEFEHL
dupa = BEFEHL
stanga = BEFEHL
dreapta = BEFEHL
inherits: \setupbtx
- 2 REFERENCE

`\btxtextcitation [...] [...]`

- 1 implicit category entry OPT short pagina num textnum an index tag keywords autor authoryears authornum authoryear
- 2 REFERENCE

`\btxtextcitation [..., ...1..., ...] [..., ...2..., ...]`

- 1 referinta = REFERENCE
alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
authoryear
inainte = BEFEHL
dupa = BEFEHL
stanga = BEFEHL
dreapta = BEFEHL
inherits: \setupbtx
- 2 KEY = VALUE

`\buildmathaccent {...} {...}`

- 1 CHARACTER
- 2 CHARACTER

`\buildtextaccent {...} {...}`

- 1 CHARACTER
- 2 CHARACTER

`\buildtextbottomcomma {...}`

- * CHARACTER

`\buildtextbottomdot {...}`

- * CHARACTER

`\buildtextcedilla {...}`

- * CHARACTER

`\buildtextgrave {...}`

* CHARACTER

`\buildtextmacron {...}`

* CHARACTER

`\buildtextognek {...}`

* CHARACTER

`\butoaneinteractiune [...1...2...] [...2...]`

1 inherits: \seteazabarainteractiune
2 pagina subpagina REFERENCE

`\buton [...1...2...] {...2} [...3]`

1 inherits: \setupbutton
2 TEXT
3 REFERENCE

`\butonmeniu [...1...2...] {...2} {...3}`

1 inherits: \setupbutton
2 TEXT
3 REFERENCE

`\butonmeniu [...1...] [...2...3...] {...3} {...4}`

1 NAME OPT
2 inherits: \seteazameniuinteractiune
3 TEXT
4 REFERENCE

`\BUTTON [...1...2...] {...2} [...3]`

1 inherits: \setupbutton
2 TEXT
3 REFERENCE

instances: button

`\Caps {...}`

* TEXT

`\CONTEXT`

`\ConTeXt`

`\Context`

`\ConvertConstantAfter \... {...2} {...3}`

1 CSNAME
2 TEXT
3 TEXT

`\ConvertToConstant \... {...2} {...3}`

1 CSNAME
2 TEXT
3 TEXT

`\CUVANT {...}`

* TEXT

`\CUVINTE {...}`

* TEXT

<pre>\Cuvant {...} * TEXT</pre>
<pre>\Cuvinte {...} * TEXT</pre>
<pre>\caligrafic</pre>
<pre>\camel {...} * TEXT</pre>
<pre>\camp [...] [...] 1 NAME OPT 2 TEXT</pre>
<pre>\catcodetablename</pre>
<pre>\cbox .¹. {...} 1 TEXT OPT 2 CONTENT</pre>
<pre>\centraligned {...} * CONTENT</pre>
<pre>\centerbox .¹. {...} 1 TEXT OPT 2 CONTENT</pre>
<pre>\centeredbox .¹. {...} 1 TEXT OPT 2 CONTENT</pre>
<pre>\centeredlastline</pre>
<pre>\centerednextbox .¹. {...} 1 TEXT OPT 2 CONTENT</pre>
<pre>\centerline {...} * CONTENT</pre>
<pre>\centru ... * CHARACTER</pre>
<pre>\cfrac [...] {...} {...} 1 l c r l^Pl^Fc lr cl cc cr rl rc rr 2 CONTENT 3 CONTENT</pre>
<pre>\CHARACTERKERNING [...] {...} 1 NUMBER OPT 2 TEXT</pre>
<pre>\chardescription {...} * NUMBER</pre>
<pre>\charwidthlanguage</pre>

<pre>\check {...} * CHARACTER</pre>
<pre>\checkcharacteralign {...} * CONTENT</pre>
<pre>\checkedblank [...,*...] * inherits: \blanc</pre>
<pre>\checkedchar {...} {...} 1 NUMBER 2 CHARACTER</pre>
<pre>\checkedfiller {...} * sym simbol rigla latime spatiu NAME BEFEHL</pre>
<pre>\checkedstrippedcsname *... * CSNAME</pre>
<pre>\checkedstrippedcsname ... * TEXT</pre>
<pre>\checkinjector [...] * NAME</pre>
<pre>\checknextindentation [...] * da nu auto</pre>
<pre>\checknextinjector [...] * NAME</pre>
<pre>\checkpage [...] [...,²...,...] 1 NAME 2 inherits: \setuppagechecker</pre>
<pre>\checkparameters [...] * TEXT</pre>
<pre>\checkpreviousinjector [...] * NAME</pre>
<pre>\checksoundtrack {...} * NAME</pre>
<pre>\checktwopassdata {...} * NAME</pre>
<pre>\checkvariables [...] [...,²...,...] 1 NAME 2 set = BEFEHL reset = BEFEHL KEY = VALUE</pre>
<pre>\chem {...} {...} {...} 1 TEXT 2 TEXT 3 TEXT</pre>


```
\chemical [...1] [...2,...] [...3,...]
1 NAME OPT OPT
2 TEXT
3 TEXT
```

```
\chemicalbottext {...}
* TEXT
```

```
\chemicalmidtext {...}
* TEXT
```

```
\chemicalsymbol [...]
* NAME
```

```
\chemicaltext {...}
* TEXT
```

```
\chemicaltoptext {...}
* TEXT
```

```
\chineseallnumerals {...}
* NUMBER
```

```
\chinesecapnumerals {...}
* NUMBER
```

```
\chinesenumerals {...}
* NUMBER
```

```
\citation [...1,...2,...] [...2]
1 referinta = REFERENCE
  alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
              authoryear
  inainte = BEFEHL
  dupa = BEFEHL
  stanga = BEFEHL
  dreapta = BEFEHL
  inherits: \setupbtx
2 REFERENCE
```

```
\citation [...1] [...2]
1 implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear
2 REFERENCE
```

```
\citation {...}
* REFERENCE
```

```
\citation [...1,...2,...] [...2,...2,...]
1 referinta = REFERENCE
  alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
              authoryear
  inainte = BEFEHL
  dupa = BEFEHL
  stanga = BEFEHL
  dreapta = BEFEHL
  inherits: \setupbtx
2 KEY = VALUE
```

`\cite [...1...] [...2]`

1 referinta ^{OPT} REFERENCE
alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear
inainte = BEFEHL
dupa = BEFEHL
stanga = BEFEHL
dreapta = BEFEHL
inherits: \setupbtx
2 REFERENCE

`\cite [...1] [...2]`

1 implicit^{OPT} category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear
2 REFERENCE

`\cite {...}`

* REFERENCE

`\cite [...1...] [...2...]`

1 referinta = REFERENCE
alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear
inainte = BEFEHL
dupa = BEFEHL
stanga = BEFEHL
dreapta = BEFEHL
inherits: \setupbtx
2 KEY = VALUE

`\clap {...}`

* CONTENT

`\classfont {...} {...}`

1 NAME
2 FONT

`\cldcommand {...}`

* BEFEHL

`\cldcontext {...}`

* BEFEHL

`\cldloadfile {...}`

* FILE

`\cldprocessfile {...}`

* FILE

`\clip [...1...] {...2}`

1 inherits: \seteazaclipping^{OPT}
2 CONTENT

`\clippedoverlayimage {...}`

* FILE

`\cloneazacamp [...1] [...2] [...3] [...4,...]`

1 NAME
2 NAME
3 NAME
4 NAME

`\collect {...}`

* CONTENT

```

\collectedtext [...,..1...,..] [...,..2...,..] {...} {...}
1 inherits: \setupcollectOPT
2 stil = STYLE BEFEHL
   culoare = COLOR
   inherits: \setezainconjurat
3 TEXT
4 CONTENT

```

```

\collectexpanded {...}
* CONTENT

```

```

\coloana [...,*...]
* inherits: \cøfñmbreak

```

```

\colorcomponents {...}
* COLOR

```

```

\colored [...,..1...,..] {...}
1 inherits: \definesteculoare
2 CONTENT

```

```

\colored [...] {...}
1 COLOR
2 CONTENT

```

```

\coloronly [...] {...}
1 COLOR
2 CONTENT

```

```

\columnbreak [...,*...]
* da nu preferinta Røcal fortat primul ultim NUMMER NAME

```

```

\columnsetspanwidth {...}
* NUMMER

```

```

\combinepages [...1] [...,..2...,..]
1 FILE
2 alternativ = a b c orizontal vertical
   n = NUMMER
   nx = NUMMER
   ny = NUMMER
   start = NUMMER
   stop = NUMMER
   distanta = DIMENSION
   sus = BEFEHL
   jos = BEFEHL
   stanga = BEFEHL
   dreapta = BEFEHL
   inainte = BEFEHL
   dupa = BEFEHL
   intre = BEFEHL
   frame = on dezactivat
   fundal = primplan culoare NAME
   culoarefundal = COLOR

```

```

\COMMENT [...1] [...,..2...,..] {...3}
1 TEXT
2 inherits: \setezacomentariu
3 TEXT
instances: comment

```

```

\comment [...1] [...,..2...,..] {...3}
1 TEXT
2 inherits: \setezacomentariu
3 TEXT

```

<code>\commalistelement</code>
<code>\commalistsentence [...¹,...] [...²,...]</code> 1 TEXT 2 TEXT
<code>\commalistsize</code>
<code>\comparagrupculoare [...]</code> * NAME
<code>\comparapaleta [...]</code> * NAME
<code>\comparedimension {...¹} {...²}</code> 1 DIMENSION 2 DIMENSION
<code>\comparedimensioneps {...¹} {...²}</code> 1 DIMENSION 2 DIMENSION
<code>\completeazanumarpagina</code>
<code>\completebtxrendering [...¹] [...²,...]</code> 1 NAME 2 inherits: \setupbtxrendering
<code>\completCOMBINEDLIST [...[*],...]</code> * inherits: \seteazalistacombinata ^{OPT} instances: content
<code>\completcontent [...[*],...]</code> * inherits: \seteazalistacombinata ^{OPT}
<code>\completelist [...¹] [...²,...]</code> 1 LISTE 2 inherits: \seteazalista
<code>\completelistofFLOATS [...[*],...]</code> * inherits: \seteazalista ^{OPT} instances: chemicals figures tables intermezzi graphics
<code>\completelistofchemicals [...[*],...]</code> * inherits: \seteazalista ^{OPT}
<code>\completelistoffigures [...[*],...]</code> * inherits: \seteazalista ^{OPT}
<code>\completelistofgraphics [...[*],...]</code> * inherits: \seteazalista ^{OPT}
<code>\completelistofintermezzi [...[*],...]</code> * inherits: \seteazalista ^{OPT}
<code>\completelistoftables [...[*],...]</code> * inherits: \seteazalista ^{OPT}

<pre> \completelistofpublications [...] [...] 1 NAME OPT OPT 2 inherits: \setupbtxrendering </pre>
<pre> \completelistofsorts [...] [...] 1 SINGULAR OPT 2 inherits: \seteazasortare </pre>
<pre> \completelistofSORTS [...] [...] * inherits: \seteazasortare OPT instances: logos </pre>
<pre> \completelistoflogos [...] [...] * inherits: \seteazasortare OPT </pre>
<pre> \completelistofsynonyms [...] [...] 1 SINGULAR OPT 2 inherits: \seteazasinonime </pre>
<pre> \completelistofSYNONYMS [...] [...] * inherits: \seteazasinonime OPT instances: abbreviations </pre>
<pre> \completelistofabbreviations [...] [...] * inherits: \seteazasinonime OPT </pre>
<pre> \completeregister [...] [...] 1 NAME OPT 2 inherits: \seteazaregstru </pre>
<pre> \completREGISTER [...] [...] * inherits: \seteazaregstru OPT instances: index </pre>
<pre> \completindex [...] [...] * inherits: \seteazaregstru </pre>
<pre> \complexorsimple *.. * CSNAME </pre>
<pre> \complexorsimpleempty *.. * CSNAME </pre>
<pre> \complexorsimpleempty {...} * TEXT CSNAME </pre>
<pre> \complexorsimple {...} * TEXT CSNAME </pre>
<pre> \componenta [...] * FILE </pre>
<pre> \componenta ... * FILE </pre>
<pre> \composedcollector {...} * NAME </pre>

<pre>\composedlayer {...} * NAME</pre>
<pre>\compresult</pre>
<pre>\constantdimen *.. * CSNAME</pre>
<pre>\constantdimenargument *.. * CSNAME</pre>
<pre>\constantemptyargument *.. * CSNAME</pre>
<pre>\constantnumber *.. * CSNAME</pre>
<pre>\constantnumberargument *.. * CSNAME</pre>
<pre>\contentreference [...¹,...] [...²,...³,...] {...³} 1 REFERENCE 2 inherits: \seteazainconjurat 3 CONTENT</pre>
<pre>\continuednumber {...} * NUMMER</pre>
<pre>\continueifinputfile {...} * FILE</pre>
<pre>\convertargument ... \to *.. 1 TEXT 2 CSNAME</pre>
<pre>\convertcommand *.. \to *.. 1 CSNAME 2 CSNAME</pre>
<pre>\convertedcounter [...¹] [...²,...³,...] 1 NAME 2 inherits: \setupcounter</pre>
<pre>\convertedddimen {...} {...} 1 DIMENSION 2 ex em pt in cm mm sp bp pc dd cc nc</pre>
<pre>\convertedsubcounter [...¹] [...²] [...³,...⁴,...] 1 NAME 2 NUMBER NUMBER:NUMBER NUMBER:* NUMBER:tot 3 inherits: \setupcounter</pre>
<pre>\convertestenumar {...} {...} 1 gol implicit niciunul luna month:mnem caracter Caracater caractere Caractere a A Numere cuvant words Cuvant Cuvinte n N numereromane Numereromane i I r R KR RK grec Grec g G abjadnumerals abjadnodotnumerals abjadnaivenumerals thainumerals devanagarinumerals gurmurkhinumerals gujaratinnumerals tibetannumerals greeknumerals Greeknumerals arabicnumerals persiannumerals arabicexnumerals arabicdecimals persiandecimals koreannumerals koreanparentnumerals koreancirclenumerals kr kr-p kr-c chinesenumerals chinesecapnumerals chineseallnumerals cn cn-c cn-a sloveniannumerals slovenianNumerals spanishnumerals spanishNumerals mathgreek set_0 set_1 set_2 set_3 continued NAME 2 NUMMER</pre>

<p><code>\convertmonth {...}</code> * NUMBER</p>
<p><code>\convertvalue ¹. \to \²..</code> 1 NAME 2 CSNAME</p>
<p><code>\convertvboxtohbox</code></p>
<p><code>\copiazacamp [...] [...]</code> 1 NAME 2 NAME</p>
<p><code>\copyboxfromcache {...} {...} ...³</code> 1 NAME 2 NUMMER TEXT 3 CSNAME NUMMER</p>
<p><code>\copyLABELtext [...] [...,²...]</code> 1 SPRACHE OPT 2 KEY = KEY instances: head label mathlabel taglabel unit operator prefix suffix btxlabel</p>
<p><code>\copybtxlabeltext [...] [...,²...]</code> 1 SPRACHE OPT 2 KEY = KEY</p>
<p><code>\copyheadtext [...] [...,²...]</code> 1 SPRACHE OPT 2 KEY = KEY</p>
<p><code>\copylabeltext [...] [...,²...]</code> 1 SPRACHE OPT 2 KEY = KEY</p>
<p><code>\copymathlabeltext [...] [...,²...]</code> 1 SPRACHE OPT 2 KEY = KEY</p>
<p><code>\copyoperatortext [...] [...,²...]</code> 1 SPRACHE OPT 2 KEY = KEY</p>
<p><code>\copyprefixtext [...] [...,²...]</code> 1 SPRACHE OPT 2 KEY = KEY</p>
<p><code>\copysuffixtext [...] [...,²...]</code> 1 SPRACHE OPT 2 KEY = KEY</p>
<p><code>\copytaglabeltext [...] [...,²...]</code> 1 SPRACHE OPT 2 KEY = KEY</p>
<p><code>\copyunittext [...] [...,²...]</code> 1 SPRACHE OPT 2 KEY = KEY</p>

```
\coppages [1...] [2...OPT...] [3...OPT...]  
1 FILE  
2 marcaje = on deaktivat  
  offset = DIMENSION  
  n      = NUMMER  
3 inherits: \setupeexternalfigure
```

```
\copyparameters [1...] [2...] [3...;...]  
1 TEXT  
2 TEXT  
3 KEY
```

```
\copyposition {1...} {2...}  
1 NAME  
2 NAME
```

```
\copysetups [1...] [2...]  
1 NAME  
2 NAME
```

```
\corectezaspatialb {*...}  
* CONTENT
```

```
\countersubs [1...] [2...]  
1 NAME  
2 NUMBER
```

```
\counttoken 1... \in 2... \to \3...  
1 TEXT  
2 TEXT  
3 CSNAME
```

```
\counttokens 1... \to \2...  
1 TEXT  
2 CSNAME
```

```
\cramped {*...}  
* CONTENT
```

```
\crampedclap {*...}  
* CONTENT
```

```
\crampedllap {*...}  
* CONTENT
```

```
\crampedrlap {*...}  
* CONTENT
```

```
\ctop 1... {2...}  
1 TEXT OPT  
2 CONTENT
```

```
\ctxcommand {*...}  
* BEFEHL
```

```
\ctxdirectcommand {*...}  
* BEFEHL
```

```
\ctxdirectlua {*...}  
* BEFEHL
```


<code>\ctxfunction {...}</code> * NAME
<code>\CTXFUNCTIONDEFINITION</code>
<code>\CTXFUNCTION</code>
<code>\ctxlatecommand {...}</code> * BEFEHL
<code>\ctxlatelua {...}</code> * BEFEHL
<code>\ctxloadluafile {...}</code> * FILE
<code>\ctxlua {...}</code> * BEFEHL
<code>\ctxluabuffer [...]</code> * BUFFER OPT
<code>\ctxluacode {...}</code> * BEFEHL
<code>\ctxreport {...}</code> * BEFEHL
<code>\ctxsprint {...}</code> * BEFEHL
<code>\culoare [...] {...}</code> 1 COLOR 2 CONTENT
<code>\culoaregri [...] {...}</code> 1 COLOR 2 CONTENT
<code>\currentassignmentlistkey</code>
<code>\currentassignmentlistvalue</code>
<code>\currentbtxuservariable {...}</code> * KEY
<code>\currentcommalistitem</code>
<code>\currentcomponent</code>
<code>\currentenvironment</code>
<code>\currentfeaturetest</code>
<code>\currentinterface</code>

<pre> \currentETICHETA [...,¹...] {²...} 1 REFERENCE OPT OPT 2 TEXT </pre>
\currentlanguage
\currentlistentrydestinationattribute
<pre> \currentlistentrylimitedtext {...} * TEXT </pre>
\currentlistentrynumber
\currentlistentrypagenumber
<pre> \currentlistentryreferenceattribute {...} * numar text numarpagina tot </pre>
\currentlistentrytitle
\currentlistentrytitlerendered
\currentlistsymbol
\currentmainlanguage
\currentmessagetext
<pre> \currentmoduleparameter {...} * KEY </pre>
\currentoutputstream
\currentproduct
\currentproject
\currentregime
<pre> \currentregisterpageuserdata {...} * KEY </pre>
\currentresponses
<pre> \currenttime [...,*...] * h m TEXT OPT </pre>
\currentvalue
\currentxtablecolumn
\currentxtablerow

<pre> \cuvant {...} * TEXT </pre>
<pre> \cuvantdreapta [...¹] {...²} 1 dreapta DIMENSION OPT 2 CONTENT </pre>
<pre> \d {...} * CHARACTER </pre>
<pre> \data [...¹,...²,...] [...²,...] 1 d = NUMBER OPT m = NUMBER y = NUMBER 2 inherits: \datacurenta </pre>
<pre> \datacurenta [...[*],...] * an luna zi zisaptamana y yy Y m mm M d dd D w W spatiu \ month:mnem m:mnem d:ord day:ord dd:ord D:ord TEXT referinta day:+ day:++ d:+ d:++ dd:+ dd:++ D:+ D:++ month:jalali m:jalali jalali:to jalali:from </pre>
<pre> \datasetvariable {...¹} {...²} {...³} 1 NAME 2 NAME NUMBER 3 KEY realpage </pre>
<pre> \dayoftheweek {...¹} {...²} {...³} 1 NUMBER 2 NUMBER 3 NUMBER </pre>
<pre> \dayspermonth {...¹} {...²} 1 NUMBER 2 NUMBER </pre>
<pre> \dddot {...} * CHARACTER </pre>
<pre> \ddot {...} * CHARACTER </pre>
<pre> \decrement \... * CSNAME </pre>
<pre> \decrementcounter [...¹] [...²] 1 NAME 2 NUMBER </pre>
<pre> \decrementedcounter [...] * NAME </pre>
<pre> \decrementpagenumber </pre>
<pre> \decrementsubpagenumber </pre>
<pre> \decrementvalue {...} * NAME </pre>
<pre> \decrement (...[*],...) * CSNAME NUMBER </pre>

<code>\defaultinterface</code>
<code>\defaultobjectpage</code>
<code>\defaultobjectreference</code>
<code>\defcatcodecommand \¹... \²... {\³...}</code> 1 CSNAME 2 CHARACTER NUMBER 3 BEFEHL
<code>\defconvertedargument \¹... {\²...}</code> 1 CSNAME 2 TEXT
<code>\defconvertedcommand \¹... \²...</code> 1 CSNAME 2 CSNAME
<code>\defconvertedvalue \¹... {\²...}</code> 1 CSNAME 2 NAME
<code>\defineactivecharacter \¹... {\²...}</code> 1 CHARACTER 2 BEFEHL
<code>\definealternativestyle [...,\¹...] [...,\²...] [...,\³...]</code> 1 NAME 2 BEFEHL 3 BEFEHL
<code>\defineanchor [...,\¹...] [...,\²...] [...,\³...,\⁴...,\⁵...] [...,\⁶...,\⁷...,\⁸...]</code> 1 NAME 2 NAME 3 inherits: \setuplayer 4 inherits: \setuplayerinherits: \seteazainconjurat
<code>\defineattachment [...,\¹...] [...,\²...] [...,\³...,\⁴...]</code> 1 NAME 2 NAME 3 inherits: \setupattachment
<code>\defineattribute [...,\¹...] [...,\²...,\³...]</code> 1 NAME 2 local global public private pickup
<code>\definebackground [...,\¹...] [...,\²...] [...,\³...,\⁴...]</code> 1 NAME 2 NAME 3 inherits: \seteazafundal
<code>\definebar [...,\¹...] [...,\²...] [...,\³...,\⁴...]</code> 1 NAME 2 NAME 3 inherits: \setupbar
<code>\definebodyfontswitch [...,\¹...] [...,\²...]</code> 1 NAME 2 inherits: \seteazafonttext

```

\definebreakpoint [...] [...] [...] [...]
1 NAME
2 CHARACTER
3 type = 1 2 3 4 5
   nstanga = NUMMER
   ndreapta = NUMMER
   stanga = BEFEHL
   mijloc = BEFEHL
   dreapta = BEFEHL
   range = da nu
   language = SPRACHE

```

```

\definebreakpoints [...]
* NAME

```

```

\definebtx [...] [...] [...] [...]
1 NAME
2 NAME
3 inherits: \setupbtx

```

```

\definebtxdataset [...] [...] [...] [...]
1 NAME
2 NAME
3 inherits: \setupbtxdataset

```

```

\definebtxregister [...] [...] [...] [...]
1 NAME
2 NAME
3 inherits: \setupbtxregister

```

```

\definebtxrendering [...] [...] [...] [...]
1 NAME
2 NAME
3 inherits: \setupbtxrendering

```

```

\definebutton [...] [...] [...] [...]
1 NAME
2 NAME
3 inherits: \setupbutton

```

```

\definecapitals [...] [...] [...] [...]
1 NAME
2 NAME
3 inherits: \seteazamajuscule

```

```

\definecharacterkerning [...] [...] [...] [...]
1 NAME
2 NAME
3 inherits: \setupcharacterkerning

```

```

\definecharacterspacing [...]
* NAME

```

```

\definechemical [...] [...]
1 NAME
2 CONTENT

```

```

\definechemicals [...] [...] [...] [...]
1 NAME
2 NAME
3 inherits: \setupchemical

```

```

\definechemicalsymbol [...] [...]
1 NAME
2 TEXT

```

```
\definecollector [1...] [2...] [3...,...,...]  
1 NAME OPT OPT  
2 NAME  
3 inherits: \setupcollector
```

```
\definecolumnbreak [1...] [2...,...]  
1 NAME  
2 da nu preferinta local fortat primul ultim NUMBER
```

```
\definecolumnset [1...] [2...] [3...,...,...]  
1 NAME OPT OPT  
2 NAME  
3 inherits: \setupcolumnset
```

```
\definecolumnsetarea [1...] [2...] [3...,...,...]  
1 NAME OPT OPT  
2 NAME  
3 inherits: \setupcolumnsetarea
```

```
\definecolumnsetspan [1...] [2...] [3...,...,...]  
1 NAME OPT OPT  
2 NAME  
3 inherits: \setupcolumnsetspan
```

```
\definecombination [1...] [2...] [3...,...,...]  
1 NAME OPT OPT  
2 NAME  
3 inherits: \setupcombination
```

```
\definecomment [1...] [2...] [3...,...,...]  
1 NAME OPT OPT  
2 NAME  
3 inherits: \seteazacommentariu
```

```
\definecomplexorsimple \*..  
* CSNAME
```

```
\definecomplexorsimpleempty \*..  
* CSNAME
```

```
\definecomplexorsimpleempty {*..}  
* TEXT CSNAME
```

```
\definecomplexorsimple {*..}  
* TEXT CSNAME
```

```
\defineconversionset [1...] [2...,...]  
1 NAME SECTIONBLOCK:NAME OPT  
2 NAME PROCESSOR->NAME  
3 NAME PROCESSOR->NAME
```

```
\definecounter [1...] [2...] [3...,...,...]  
1 NAME OPT OPT  
2 NAME  
3 inherits: \setupcounter
```

```
\definedataset [1...] [2...] [3...,...,...]  
1 NAME OPT OPT  
2 NAME  
3 inherits: \setupdataset
```

```
\definedelimitedtext [1...] [2...] [3...,...3...,...]
1 NAME
2 NAME
3 inherits: \setupdelimitedtext
```

```
\definedfont [*...]
* FONT OPT
```

```
\defineeffect [1...] [2...] [3...,...3...,...]
1 NAME
2 NAME
3 inherits: \setupeffect
```

```
\defineexpandable [1...] \2... {3...}
1 NUMBER OPT
2 CSNAME
3 CONTENT
```

```
\defineexternalfigure [1...] [2...] [3...,...3...,...]
1 NAME
2 NAME
3 inherits: \setupexternalfigure
```

```
\definefacingfloat [1...] [2...] [3...,...3...,...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupfacingfloat
```

```
\definefallbackfamily [1...] [2...] [3...] [4...,...4...,...]
1 NAME OPT
2 rm ss tt mm hw cg roman serif regular sansserif sans suport teletype type mono scrismatematica caligrafic math
3 FONT
4 rscale = NUMBER
designsize = implicit auto
goodies = FILE
range = NUMBER NAME
offset = NUMBER NAME
check = da nu
fortat = da nu
features = NAME
tf = TEXT
bf = TEXT
it = TEXT
sl = TEXT
bi = TEXT
bs = TEXT
sc = TEXT
```

```
\definefallbackfamily [1...] [2...] [3...] [4...,...4...,...]
1 NAME OPT
2 rm ss tt mm hw cg roman serif regular sansserif sans suport teletype type mono scrismatematica caligrafic math
3 FONT
4 NAME
```

```
\definefieldbody [1...] [2...] [3...,...3...,...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupfieldbody
```

```
\definefieldbodyset [1...] [2...,...2...]
1 NAME
2 NAME
```

`\definefieldcategory [...1] [...2] [...,3...,...]`

- 1 NAME
- 2 NAME
- 3 inherits: \setupfieldcategory

`\definefileconstant {...} {...}`

- 1 NAME
- 2 NAME

`\definefilefallback [...1] [...2,...]`

- 1 NAME
- 2 FILE

`\definefilesynonym [...1] [...2]`

- 1 NAME
- 2 FILE

`\definefiller [...1] [...2] [...,3...,...]`

- 1 NAME
- 2 NAME
- 3 inherits: \setupfiller

`\definefirstline [...1] [...2] [...,3...,...]`

- 1 NAME
- 2 NAME
- 3 inherits: \setupfirstline

`\definefittingpage [...1] [...2] [...,3...,...]`

- 1 NAME
- 2 NAME
- 3 inherits: \setupfittingpage

`\definefontalternative [...*]`

- * NAME

`\definefontfallback [...1] [...2] [...,3...] [...,4...,...]`

- 1 NAME
- 2 FONT NAME
- 3 NAME NUMBER
- 4 rscale = NUMBER
- fortat = da nu
- check = da nu
- offset = NUMBER NAME
- features = NAME
- factor = NUMBER

`\definefontfamily [...1] [...2] [...3] [...,4...,...]`

- 1 NAME
- 2 rm ss tt mm hw cg roman serif regular sansserif sans suport teletype type mono scrismannual caligrafic math matematica
- 3 FONT
- 4 rscale = NUMBER
- designsize = implicit auto
- goodies = FILE
- features = NAME
- tf = TEXT
- bf = TEXT
- it = TEXT
- sl = TEXT
- bi = TEXT
- bs = TEXT
- sc = TEXT

`\definefontfamilypreset [...1] [...,2...,...]`

- 1 NAME
- 2 inherits: \definefontfamily

`\definefontfamilypreset` [¹...] [²...]

- 1 NAME
- 2 NAME

`\definefontfamily` [¹...] [²...] [³...] [⁴...,...]

- 1 NAME
- 2 rm ss tt mm hw cg roman serif regular sansserif sans suport teletype type mono scrismannual caligrafic math
matematica
- 3 FONT
- 4 NAME

`\definefontfeature` [¹...] [²...] [³...,...]

- 1 NAME
- 2 NAME
- 3 language = NAME
- script = NAME auto
- mode = node base auto niciunul
- liga = da nu
- kern = da nu
- extrakerns = da nu
- tlig = da nu
- trep = da nu
- missing = da nu
- dummies = da nu
- analyze = da nu
- unicoding = da nu
- expansiune = NAME
- protrusion = NAME
- nostackmath = da nu
- realdimensions = da nu
- itlc = da nu
- textitalics = da nu
- mathitalics = da nu
- slant = NUMMER
- extend = NUMMER
- dimensions = NUMMER
- boundingbox = da nu fundal incadrat gol COLOR
- compose = da nu
- char-ligatures = da nu
- compat-ligatures = da nu
- goodies = FILE
- extrafeatures = da nu
- featureset = NAME
- colorsheme = NAME
- postprocessor = NAME
- mathdimensions = NAME
- keepligatures = da nu auto
- devanagari = da nu
- features = da nu
- tcom = da nu
- anum = da nu
- mathsize = da nu
- decomposehangul = da nu
- mathalternatives = da nu
- mathgaps = da nu
- checkmarks = da nu
- NAME = da nu
- mathnolimitsmode = NUMMER
- blockligatures = da nu

`\definefontfile` [¹...] [²...] [³...,...]

- 1 NAME
- 2 FILE
- 3 features = NAME
- fallbacks = NAME
- goodies = NAME
- designsize = auto implicit

`\definefontsize` [...]

- * NAME

`\definefontsolution [...1] [...2] [...3...]`

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setupfontsolution

`\defineformula [...1] [...2] [...3...]`

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setupformula

`\defineformulaalternative [...1] [...2] [...3]`

- 1 NAME
- 2 CSNAME
- 3 CSNAME

`\defineformulaframed [...1] [...2] [...3...]`

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setupformulaframed

`\defineframedcontent [...1] [...2] [...3...]`

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setupframedcontent

`\defineframedtable [...1] [...2]`

- 1 NAME OPT
- 2 NAME

`\definefrozenfont [...1] [...2]`

- 1 NAME
- 2 FONT

`\defineglobalcolor [...1] [...2...]`

- 1 NAME
- 2 inherits: \definesteculoare

`\defineglobalcolor [...1] [...2]`

- 1 NAME
- 2 COLOR

`\definegraphicstypesynonym [...1] [...2]`

- 1 NAME
- 2 NAME

`\definegridsnapping [...1] [...2...]`

- 1 NAME
- 2 local global noheight nodepth box max min niciunul linie jumatatelinie primul ultim inaltime minima maxheight mindepth maxdepth sus subsol strut NUMMER minheight:NUMMER maxheight:NUMMER mindepth:NUMMER maxdepth:NUMMER box:NUMMER top:NUMMER bottom:NUMMER offset:NUMMER

`\defineheadalternative [...1] [...2] [...3...]`

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setupheadalternative

`\definehelp [...1] [...2] [...3...]`

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setuphelp

`\definehigh` [¹...] [²...] [³...,...]

1 NAME OPT OPT
2 NAME
3 inherits: \setuphigh

`\definehighlight` [¹...] [²...] [³...,...]

1 NAME OPT OPT
2 NAME
3 inherits: \setuphighlight

`\definehspace` [¹...] [²...] [³]

1 NAME OPT
2 NAME
3 DIMENSION

`\definehyphenationfeatures` [¹...] [²...,...]

1 NAME
2 characters = TEXT
hyphens = da tot TEXT
joiners = da tot TEXT
rightwords = NUMMER
hyphenmin = NUMMER
lefthyphenmin = NUMMER
righthyphenmin = NUMMER
lefthyphenchar = NUMMER
righthyphenchar = NUMMER
alternativ = original tex hyphenate expanded traditional niciunul
borduradreapta = tex
rightchars = cuvânt NUMMER

`\defineindentedtext` [¹...] [²...] [³...,...]

1 NAME OPT OPT
2 NAME
3 inherits: \setupindentedtext

`\defineindenting` [¹...] [²...,...]

1 NAME
2 [-+]mic [-+]mediu [-+]mare niciunul nu nu primul urmatorul da totdeauna niciodata impar par normal reset toggle
DIMENSION

`\defineinitial` [¹...] [²...] [³...,...]

1 NAME OPT OPT
2 NAME
3 inherits: \setupinitial

`\defineinsertion` [¹...] [²...] [³...,...]

1 NAME OPT OPT
2 NAME
3 inherits: \setupinsertion

`\defineinteraction` [¹...] [²...] [³...,...]

1 NAME OPT OPT
2 NAME
3 inherits: \seteazainteractiunea

`\defineinteractionbar` [¹...] [²...] [³...,...]

1 NAME OPT OPT
2 NAME
3 inherits: \seteazarainteractiune

`\defineinterfaceconstant` {¹...} {²...}

1 NAME
2 NAME

`\defineinterfaceelement` {¹...} {²...}

1 NAME
2 NAME

`\defineinterfacevariable` [¹...] [²...]

- 1 NAME
- 2 NAME

`\defineinterlinespace` [¹...] [²...] [³...,...]

- 1 NAME
- 2 NAME
- 3 inherits: \seteazaspatiinterliniar

`\defineintermediatecolor` [¹...] [²...,...] [³...,...]

- 1 NAME
- 2 COLOR NUMBER
- 3 a = NUMBER
t = NUMBER

`\defineitemgroup` [¹...] [²...] [³...,...]

- 1 NAME
- 2 NAME
- 3 inherits: \setupitemgroup

`\defineitems` [¹...] [²...] [³...,...]

- 1 NAME
- 2 NAME
- 3 inherits: \seteazaelemente

`\definelabelclass` [¹...] [²...]

- 1 NAME
- 2 NUMBER

`\definelayer` [¹...] [²...] [³...,...]

- 1 NAME
- 2 NAME
- 3 inherits: \setuplayer

`\definelayerpreset` [¹...] [²...,...]

- 1 NAME
- 2 inherits: \setuplayer

`\definelayerpreset` [¹...] [²...]

- 1 NAME
- 2 NAME

`\definelayout` [¹...] [²...] [³...,...]

- 1 NAME
- 2 NAME
- 3 inherits: \seteazaaspect

`\definelinefiller` [¹...] [²...] [³...,...]

- 1 NAME
- 2 NAME
- 3 inherits: \setuplinefiller

`\definelinenote` [¹...] [²...] [³...,...]

- 1 NAME
- 2 NAME
- 3 inherits: \setuplinenote

`\definelinenumbering` [¹...] [²...] [³...,...]

- 1 NAME
- 2 NAME
- 3 inherits: \seteazanumerotarelinii

`\definelines [..1] [..2] [..3..,.,.]`

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \seteazalinii

`\definelistalternative [..1] [..2] [..3..,.,.]`

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setuplistalternative

`\definelistextra [..1] [..2] [..3..,.,.]`

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setuplistextra

`\definelow [..1] [..2] [..3..,.,.]`

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setuplow

`\definelowhigh [..1] [..2] [..3..,.,.]`

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setuplowhigh

`\definelowmidhigh [..1] [..2] [..3..,.,.]`

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setuplowmidhigh

`\defineMPinstance [..1] [..2] [..3..,.,.]`

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setupMPinstance

`\definemarginblock [..1] [..2] [..3..,.,.]`

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setupmarginblock

`\definemargindata [..1] [..2] [..3..,.,.]`

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setupmargindata

`\definemarker [.*..]`

- * NAME

`\definemathaccent 1 2`

- 1 NAME
- 2 CHARACTER

`\definemathalignment [..1] [..2] [..3..,.,.]`

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setupmathalignment

`\definemathcases [..1] [..2] [..3..,.,.]`

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setupmathcases

```

\definemathcommand [1.] [2.] [3.] {4.}
1 NAME OPT OPT OPT
2 ord op bin rel open close punct alpha intern nothing limop nolop box
3 unu doi
4 BEFEHL \...##1 \...##1##2

```

```

\definemathdouble [1.] [2.] [3.] [4.]
1 ambele vfenced NAME
2 NAME
3 NUMMER
4 NUMMER

```

```

\definemathdoubleextensible [1.] [2.] [3.] [4.]
1 ambele vfenced OPT
2 NAME
3 NUMMER
4 NUMMER

```

```

\definematematics [1.] [2.] [3...3...3...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupmatematics

```

```

\definemathextensible [1.] [2.] [3.]
1 reverse matematica text chemistry
2 NAME
3 NUMMER

```

```

\definemathfence [1.] [2.] [3...3...3...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupmathfence

```

```

\definemathfraction [1.] [2.] [3...3...3...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupmathfraction

```

```

\definemathframed [1.] [2.] [3...3...3...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupmathframed

```

```

\definemathmatrix [1.] [2.] [3...3...3...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupmathmatrix

```

```

\definemathornament [1.] [2.] [3...3...3...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupmathornament

```

```

\definemathover [1.] [2.] [3.]
1 sus vfenced NAME
2 NAME
3 NUMMER

```

```

\definemathoverextensible [1.] [2.] [3.]
1 sus vfenced OPT
2 NAME
3 NUMMER

```

`\definemathtexttextensibile` [¹...] [²...] [³...]

- 1 bothtext OPT
- 2 NAME
- 3 NUMMER

`\definemathradical` [¹...] [²...] [...,³...,...]

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setupmathradical

`\definemathstackers` [¹...] [²...] [...,³...,...]

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setupmathstackers

`\definemathstyle` [¹...] [...²,...]

- 1 NAME
- 2 display text script scriptscript cramped uncramped normal impachetat mic mare

`\definemathtriplet` [¹...] [²...] [³...]

- 1 NAME OPT OPT
- 2 NAME
- 3 TEXT

`\definemathunder` [¹...] [²...] [³...]

- 1 subsol vfenced NAME
- 2 NAME
- 3 NUMMER

`\definemathunderextensible` [¹...] [²...] [³...]

- 1 subsol vfenced OPT
- 2 NAME
- 3 NUMMER

`\definemathundertexttextensibile` [¹...] [²...] [³...]

- 1 bothtext OPT
- 2 NAME
- 3 NUMMER

`\definemathunstacked` [¹...] [²...] [³...]

- 1 larg OPT
- 2 NAME
- 3 NUMMER

`\definemeasure` [¹...] [²...]

- 1 NAME
- 2 DIMENSION

`\definemessageconstant` {...}

- * NAME

`\definemixedcolumns` [¹...] [²...] [...,³...,...]

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setupmixedcolumns

`\definemode` [...¹,...] [²...]

- 1 NAME OPT
- 2 da nu mentine

```
\definemultitonecolor [...1.] [...2...2...] [...3...3...] [...4...4...]
1 NAME
2 COLOR = NUMMER
3 inherits: \definesteculoare
4 inherits: \definespotcolor
```

```
\definenamecolor [...1.] [...2...2...]
1 NAME
2 inherits: \definesteculoare
```

```
\definenamecolor [...1.] [...2.]
1 NAME
2 COLOR
```

```
\definenamespace [...1.] [...2...2...]
1 NAME
2 nume = TEXT
parent = TEXT
stil = da nu
comanda = da nu lista
setup = da nu lista
set = da nu lista
frame = da nu
```

```
\definearrower [...1.] [...2.] [...3...3...]
1 NAME
2 NAME
3 inherits: \seteazaingust
```

```
\definernote [...1.] [...2.] [...3...3...]
1 NAME
2 NAME
3 inherits: \setupnote
```

```
\defineornament [...1.] [...2...2...] [...3...3...]
1 NAME
2 alternativ = a b
inherits: \setupcollector
3 stil = STYLE BEFEHL
culoare = COLOR
inherits: \seteazainconjurat
```

```
\defineornament [...1.] [...2...2...] [...3...3...]
1 NAME
2 alternativ = a b
inherits: \setuplayer
3 inherits: \setuplayeredtext
```

```
\defineoutputroutine [...1.] [...2.] [...3...3...]
1 NAME
2 NAME
3 inherits: \setupoutputroutine
```

```
\defineoutputroutinecommand [...*...]
* KEY
```

```
\definepage [...1.] [...2.]
1 NAME
2 REFERENCE
```

```
\definepagebreak [...1.] [...2...]
1 NAME
2 gol antet subsol dummy incadrat NUMMER +NUMMER implicit reset dezactivat da nu marcaj blank preferinta preferintamare
stanga dreapta par impar cvadрупul ultim ultimpagina start stop
```


`\definepagechecker [..] [..] [..,.,.,.]`

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setuppagechecker

`\definepagecolumns [..] [..] [..,.,.,.]`

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setuppagecolumns

`\definepageinjection [..] [..] [..,.,.,.]`

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setuppageinjection

`\definepageinjectionalternative [..] [..] [..,.,.,.]`

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setuppageinjectionalternative

`\definepageshift [..] [..] [..,.,.]`

- 1 NAME
- 2 orizontal vertical
- 3 DIMENSION

`\definepagestate [..] [..] [..,.,.,.]`

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setuppagestate

`\definepairedbox [..] [..] [..,.,.,.]`

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setuppairedbox

`\defineparagraph [..] [..] [..,.,.,.]`

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setupparagraph

`\defineparallel [..] [..,.,.]`

- 1 NAME
- 2 NAME

`\defineparbuilder [.*]`

- * NAME

`\defineperiodkerning [..] [..] [..,.,.,.]`

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setupperiodkerning

`\defineplacement [..] [..] [..,.,.,.]`

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setupplacement

`\definepositioning [..] [..] [..,.,.,.]`

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setarepozitie

`\defineprefixset [..1] [...2,...] [...3]`

1 NAME SECTIONBLOCK:NAME OPT
2 ABSCHNITT
3 ABSCHNITT

`\defineprocesscolor [..1] [...2] [...3,...,...]`

1 NAME OPT
2 COLOR
3 inherits: \definesteculoare

`\defineprocessor [..1] [...2] [...3,...,...]`

1 NAME OPT OPT
2 NAME
3 inherits: \setupprocessor

`\definepushbutton [..1] [...2,...,...]`

1 NAME OPT
2 inherits: \setupfieldcontentframed

`\definepushsymbol [..1] [...2]`

1 NAME
2 n r d

`\definerenderingwindow [..1] [...2] [...3,...,...]`

1 NAME OPT OPT
2 NAME
3 inherits: \setuprenderingwindow

`\defineresetset [..1] [...2,...] [...3]`

1 NAME SECTIONBLOCK:NAME OPT
2 NUMMER
3 NUMMER

`\defineruby [..1] [...2] [...3,...,...]`

1 NAME OPT OPT
2 NAME
3 inherits: \setupruby

`\definescale [..1] [...2] [...3,...,...]`

1 NAME OPT OPT
2 NAME
3 inherits: \setupscale

`\definescript [..1] [...2] [...3,...,...]`

1 NAME OPT OPT
2 NAME
3 inherits: \setupscript

`\definesectionlevels [..1] [...2,...]`

1 NAME
2 ABSCHNITT

`\defineselector [..1] [...2,...,...]`

1 NAME OPT
2 inherits: \setupselector

`\defineseparatorset [..1] [...2,...] [...3]`

1 NAME SECTIONBLOCK:NAME OPT
2 BEFEHL PROCESSOR->BEFEHL
3 BEFEHL PROCESSOR->BEFEHL

`\defineshift [...]1 [...]2 [...]3...`

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setupshift

`\definesidebar [...]1 [...]2 [...]3...`

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setupsidebar

`\definesort [...]1 [...]2 [...]3 {...}4`

- 1 da nu OPT
- 2 SINGULAR
- 3 NAME
- 4 CONTENT

`\definespotcolor [...]1 [...]2 [...]3...`

- 1 NAME
- 2 COLOR
- 3 a = NUMBER niciunul normal multiply ecran overlay softlight hardlight colordodge colorburn darken lighten difference exclusion hue saturation culoare luminosity
- t = NUMBER
- e = TEXT
- p = NUMBER

`\defineste [...]1 \...2 {...}3`

- 1 NUMBER OPT
- 2 CSNAME
- 3 CONTENT

`\definesteaccent ...1 ...2 ...3`

- 1 CHARACTER
- 2 CHARACTER
- 3 CHARACTER

`\definesteantet [...]1 [...]2 [...]3...`

- 1 NAME OPT OPT
- 2 ABSCHNITT
- 3 inherits: \seteazatitlu

`\definestebloc [...]1 [...]2 [...]3...`

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \seteazabloc

`\definesteblocsectiune [...]1 [...]2 [...]3...`

- 1 NAME OPT
- 2 NAME
- 3 inherits: \seteazablocsectiune

`\definestebuffer [...]1 [...]2 [...]3...`

- 1 NAME OPT OPT
- 2 BUFFER
- 3 inherits: \seteazabuffer

`\definestecamp [...]1 [...]2 [...]3 [...]4... [...]5`

- 1 NAME
- 2 radio sub text linie push check signature
- 3 NAME
- 4 NAME
- 5 NAME

`\definestecaracter ...1 ...2`

- 1 CHARACTER
- 2 NUMMER

`\definestecomanda 1... 2...`

- 1 CHARACTER
- 2 BEFEHL

`\definesteconversie [1...] [2...] [3...]`

- 1 SPRACHE
- 2 NAME
- 3 CSNAME

`\definesteconversie [1...] [2...] [3...,...]`

- 1 SPRACHE
- 2 NAME
- 3 TEXT

`\definesteculoare [1...] [2...,...2...,...]`

- 1 NAME
- 2 r = NUMMER
- g = NUMMER
- b = NUMMER
- c = NUMMER
- m = NUMMER
- y = NUMMER
- k = NUMMER
- h = NUMMER
- s = NUMMER
- v = NUMMER
- x = NUMMER
- a = NUMMER niciunul normal multiply ecran overlay softlight hardlight colordodge colorburn darken lighten difference exclusion hue saturation culoare luminosity
- t = NUMMER

`\definesteculoare [1...] [2...]`

- 1 NAME
- 2 COLOR

`\definestedescriere [1...] [2...] [3...,...3...,...]`

- 1 NAME
- 2 NAME
- 3 inherits: \setupdescription

`\definestedimensiunehartie [1...] [2...,...2...,...]`

- 1 NAME
- 2 latime = DIMENSION
- inaltime = DIMENSION
- sus = BEFEHL
- jos = BEFEHL
- stanga = BEFEHL
- dreapta = BEFEHL
- distanta = DIMENSION
- pagina = inherits: \seteazadimensiunehartie
- hartie = inherits: \seteazadimensiunehartie

`\definestedimensiunehartie [1...] [2...,...2...,...] [3...,...3...,...]`

- 1 NAME
- 2 inherits: \seteazadimensiunehartie
- 3 inherits: \seteazadimensiunehartie

`\definesteenumerare [1...] [2...] [3...,...3...,...]`

- 1 NAME
- 2 NAME
- 3 inherits: \setupenumeration

`\definesteeticheta [1...] [2...] [3...,...3...,...]`

- 1 NAME
- 2 NAME
- 3 inherits: \setuplabel

```

\definestefloat [...1] [...2] [...3...]
1 SINGULAR OPT OPT
2 SINGULAR PLURAL
3 inherits: \seteazaafloat
instances: chemical figure table intermezzo graphic

```

```

\definestefloat [...1] [...2] [...3]
1 SINGULAR OPT OPT
2 PLURAL
3 SINGULAR
instances: chemical figure table intermezzo graphic

```

```

\definestefont [...1] [...2] [...3...]
1 NAME OPT
2 FONT
3 inherits: \seteazaspatiuinterliniar

```

```

\definestefonttext [...1...] [...2...] [...3...] [...4...]
1 NAME implicit OPT OPT
2 NAME DIMENSION
3 rm ss tt hw cg
4 tf = FILE
bf = FILE
it = FILE
sl = FILE
bi = FILE
bs = FILE
sc = FILE
mr = FILE
mrlr = FILE
mrrl = FILE
mb = FILE
mblr = FILE
mbrl = FILE

```

```

\definestefonttext [...1...] [...2...] [...3...] [...4]
1 NAME implicit OPT OPT
2 NAME DIMENSION
3 rm ss tt hw cg
4 NAME

```

```

\definestefont [...1] [...2] [...3]
1 NAME OPT
2 FONT
3 NAME

```

```

\definesteformatreferinte [...1] [...2] [...3...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupreferenceformat

```

```

\definestegrupculori [...1] [...2] [x:y:3z,..]
1 NAME OPT
2 gri rgb cmyk spot
3 TRIPLET

```

```

\definestehbox [...1] [...2]
1 NAME
2 DIMENSION

```

```

\definesteinconjurare [...1] [...2] [...3...]
1 NAME OPT OPT
2 NAME
3 inherits: \seteazainconjurat

```

`\definestelista [...1] [...2] [...,3...]`

1 NAME OPT OPT
2 LISTE
3 inherits: \seteazalista

`\definestelistacombinata [...1] [...,2...] [...,3...]`

1 NAME OPT
2 LISTE
3 inherits: \seteazalistacombinata

`\definestemakeup [...1] [...2] [...,3...]`

1 NAME OPT OPT
2 NAME
3 inherits: \seteazamakeup

`\definestemarcaje [...1] [...2] [...,3...]`

1 NAME OPT OPT
2 BESCHRIFTUNG
3 inherits: \seteazamarcaje

`\definestemediulfonttext [...1] [...2] [...,3...]`

1 NAME OPT OPT
2 implicit DIMENSION
3 mare = DIMENSION NUMMER
mic = DIMENSION NUMMER
a = DIMENSION NUMMER
b = DIMENSION NUMMER
c = DIMENSION NUMMER
d = DIMENSION NUMMER
text = DIMENSION NUMMER
x = DIMENSION NUMMER
xx = DIMENSION NUMMER
script = DIMENSION NUMMER
scriptscript = DIMENSION NUMMER
spatiereinterliniara = DIMENSION
em = inclinat italic STYLE BEFEHL
* = NUMMER

`\definestemeniuinteractiune [...1] [...2] [...,3...]`

1 NAME OPT OPT
2 NAME
3 inherits: \seteazamenuinteractiune

`\definesteoverlay [...1,...] [...2] [...3]`

1 NAME OPT
2 NAME
3 BEFEHL

`\definestepaleta [...1] [...,2...]`

1 NAME
2 NAME = COLOR

`\definestepaleta [...1] [...2]`

1 NAME
2 NAME

`\definesteparagraf [...1] [...2] [...,3...]`

1 NAME OPT OPT
2 NAME
3 inherits: \seteazaparagrafe

`\definesteprofil [...1] [...2] [...,3...]`

1 NAME OPT OPT
2 NAME
3 inherits: \setupprofile

`\definesteprogram [...1] [...2] [...3]`

1 NAME OPT
2 TEXT
3 TEXT

`\definestereferinte [...1] [...2;...]`

1 NAME
2 REFERENCE

`\definesteregistru [...1] [...2] [...3...3...]`

1 NAME OPT OPT
2 NAME
3 inherits: \seteazaregistru

`\definestesablontabel [...1] [...2.|] [...3] [...4]`

1 NAME OPT OPT
2 TEMPLATE
3 NAME
4 NAME

`\definestesectiune [...*]`

* NAME

`\definestesimbol [...1] [...2] [...3]`

1 NAME OPT
2 NAME
3 BEFEHL

`\definestesimbolfigura [...1] [...2] [...3...3...]`

1 NAME OPT
2 FILE NAME
3 inherits: \figuraexterna

`\definestesinonim [...1] [...2] [...3] [...4]`

1 SINGULAR OPT OPT
2 PLURAL
3 CSNAME
4 CSNAME

`\definestesinonimfont [...1] [...2] [...3...3...]`

1 NAME OPT
2 FONT
3 features = NAME
 fallbacks = NAME
 goodies = NAME
 designsize = auto implicit

`\definestesortare [...1] [...2] [...3]`

1 SINGULAR OPT
2 PLURAL
3 niciunul CSNAME

`\definestestartstop [...1] [...2] [...3...3...]`

1 NAME OPT OPT
2 NAME
3 inherits: \setupstartstop

`\definestestil [...1] [...2] [...3...3...]`

1 NAME OPT OPT
2 NAME
3 inherits: \setupstyle

`\definestestilfont [...1...1] [...2]`

1 NAME
2 NAME

```
\definestestivacampuri [...] [...2,...] [...3...,...]
1 NAME
2 NAME
3 inherits: \setupfieldcategory
```

```
\definestesubcamp [...] [...2] [...3,...]
1 NAME
2 NAME
3 NAME
```

```
\definestetabulatori [...] [...2] [...3/...]
1 NAME
2 NAME
3 TEMPLATE
```

```
\definestetext [...] [...2] [...3] [...4] [...5] [...6] [...7]
1 NAME
2 sus antet text subsol subsol
3 text margine bordura
4 data numarpagina BESCHRIFTUNG TEXT BEFEHL
5 data numarpagina BESCHRIFTUNG TEXT BEFEHL
6 data numarpagina BESCHRIFTUNG TEXT BEFEHL
7 data numarpagina BESCHRIFTUNG TEXT BEFEHL
```

```
\definestetexteinconjurate [...1,...] [...2...,...]
1 NAME
2 inherits: \setupframedtext
```

```
\definestetextinconjurat [...] [...2] [...3...,...]
1 NAME
2 NAME
3 inherits: \setupframedtext
```

```
\definestetyping [...] [...2] [...3...,...]
1 NAME
2 NAME
3 inherits: \seteazatyping
```

```
\definestyleinstance [...] [...2] [...3] [...4]
1 NAME
2 rm ss tt mm hw cg
3 tf bf it sl bi bs sc
4 BEFEHL
```

```
\definesubformula [...] [...2] [...3...,...]
1 NAME
2 NAME
3 inherits: \setupsubformula
```

```
\definesynonym [...] [...2] [...3] {...4} {...5}
1 da nu
2 SINGULAR
3 NAME
4 TEXT
5 CONTENT
```

```
\definesystemattribute [...] [...2,...]
1 NAME
2 local global public private pickup
```

```
\definesystemconstant {...}
* NAME
```

```
\definesystemvariable {...}
* NAME
```


`\defineTABLEsetup` [¹...] [²...]

- 1 NAME
- 2 inherits: \setupTABLE

`\definetabulation` [¹...] [²...] [³...]

- 1 NAME
- 2 NAME
- 3 inherits: \setuptabulation

`\definetextbackground` [¹...] [²...] [³...]

- 1 NAME
- 2 NAME
- 3 inherits: \setuptextbackground

`\definetextflow` [¹...] [²...] [³...]

- 1 NAME
- 2 NAME
- 3 inherits: \setuptextflow

`\definetooltip` [¹...] [²...] [³...]

- 1 NAME
- 2 NAME
- 3 inherits: \setuptooltip

`\definetransparency` [¹...] [²...]

- 1 NAME
- 2 NUMBER

`\definetransparency` [¹...] [²...]

- 1 NAME
- 2 a = NUMBER niciunul normal multiply ecran overlay softlight hardlight colordodge colorburn darken lighten
difference exclusion hue saturation culoare luminosity
t = NUMBER

`\definetransparency` [¹...] [²...]

- 1 NAME
- 2 NAME

`\definetwopasslist` {...}

- * NAME

`\definetype` [¹...] [²...] [³...]

- 1 NAME
- 2 NAME
- 3 inherits: \seteazatype

`\definetypeface` [¹...] [²...] [³...] [⁴...] [⁵...] [⁶...]

- 1 NAME
- 2 rm ss tt mm hw cg
- 3 serif sans mono math handwriting calligraphy
- 4 NAME
- 5 implicit dtp
- 6 rscale = auto NUMBER
features = NAME
fallbacks = NAME
goodies = NAME
designsize = auto implicit
directie = ambele

`\definetypescriptprefix` [¹...] [²...]

- 1 NAME
- 2 TEXT

`\definetypescriptsynonym [..1] [..2]`

- 1 NAME
- 2 TEXT

`\definetypesetting [..1] [..2] [..3..,..3..,..3..]`

- 1 NAME
- 2 TEXT
- 3 inherits: \setupexternalfigure

`\defineunit [..1] [..2] [..3..,..3..,..3..]`

- 1 NAME
- 2 NAME
- 3 inherits: \setupunit

`\defineviewerlayer [..1] [..2] [..3..,..3..,..3..]`

- 1 NAME
- 2 NAME
- 3 inherits: \setupviewerlayer

`\definespace [..1] [..2] [..3]`

- 1 NAME
- 2 NAME
- 3 DIMENSION

`\definevspacing [..1] [..2]`

- 1 NAME
- 2 inherits: \vspacing

`\definevspacingamount [..1] [..2] [..3]`

- 1 NAME
- 2 DIMENSION
- 3 DIMENSION

`\definetable [..1] [..2] [..3..,..3..,..3..]`

- 1 NAME
- 2 NAME
- 3 inherits: \setupxtable

`\delimited [..1] [..2] {..3}`

- 1 NAME
- 2 SPRACHE
- 3 CONTENT

`\delimitedtext [..1] [..2] {..3}`

- 1 NAME
- 2 SPRACHE
- 3 CONTENT

`\DELIMITEDTEXT [..1] {..2}`

- 1 SPRACHE
 - 2 CONTENT
- instances: quotation quote blockquote speech aside

`\aside [..1] {..2}`

- 1 SPRACHE^{OPT}
- 2 CONTENT

`\blockquote [..1] {..2}`

- 1 SPRACHE
- 2 CONTENT

`\quotation [..1] {..2}`

- 1 SPRACHE
- 2 CONTENT

<p><code>\quote [..] {..}</code></p> <p>1 SPRACHE^{OPT}</p> <p>2 CONTENT</p>
<p><code>\speech [..] {..}</code></p> <p>1 SPRACHE^{OPT}</p> <p>2 CONTENT</p>
<p><code>\depthofstring {..}</code></p> <p>* TEXT</p>
<p><code>\depthonlybox {..}</code></p> <p>* CONTENT</p>
<p><code>\depthspanningtext {..} {..} {..}</code></p> <p>1 TEXT</p> <p>2 DIMENSION</p> <p>3 FONT</p>
<p><code>\depthstrut</code></p>
<p><code>\DESCRIERE [...,¹...] {..²} ...³ \par</code></p> <p>1 REFERENCE^{OPT}</p> <p>2 TEXT</p> <p>3 CONTENT</p>
<p><code>\despre [..]</code></p> <p>* REFERENCE</p>
<p><code>\determinacaracteristicilelistei [...,¹...] [...,²...]</code></p> <p>1 LISTE</p> <p>2 inherits: \seteazalista</p>
<p><code>\determinacaracteristiciregistrului [..] [...,²...]</code></p> <p>1 NAME</p> <p>2 language = implicit DIN_5007-1 DIN_5007-2 Duden de-DE de-CH de-AT ru-iso9 ocs-scن SPRACHE</p> <p>metoda = implicit inainte dupa primul ultim ch mm zm pm mc zc pc uc</p> <p>numberorder = numere</p> <p>compress = da nu tot</p> <p>criteriu = local text curent precedent tot ABSCHNITT</p>
<p><code>\determinanumartitlu [..]</code></p> <p>* ABSCHNITT</p>
<p><code>\determinenoflines {..}</code></p> <p>* CONTENT</p>
<p><code>\devanagarinumerals {..}</code></p> <p>* NUMMER</p>
<p><code>\digits {..}</code></p> <p>* NUMMER</p>
<p><code>\digits ...</code></p> <p>* NUMMER</p>
<p><code>\dimensiontocount {..} \^2..</code></p> <p>1 DIMENSION</p> <p>2 CSNAME</p>

<pre>\din [.*.] * REFERENCE</pre>
<pre>\directboxfromcache {¹.} {².} 1 NAME 2 NUMMER TEXT</pre>
<pre>\directcolor [.*.] * COLOR</pre>
<pre>\directcolored [...,.*,...] * inherits: \definesteculoare</pre>
<pre>\directcolored [.*.] * COLOR</pre>
<pre>\directconvertedcounter {¹.} {².} 1 NAME 2 primul precedent urmatorul ultim numar</pre>
<pre>\directcopyboxfromcache {¹.} {².} 1 NAME 2 NUMMER TEXT</pre>
<pre>\directdummyparameter {.*.} * KEY</pre>
<pre>\directgetboxllx ... * CSNAME NUMMER</pre>
<pre>\directgetboxlly ... * CSNAME NUMMER</pre>
<pre>\directhighlight {¹.} {².} 1 NAME 2 TEXT</pre>
<pre>\directlocalframed [¹.] {².} 1 NAME 2 CONTENT</pre>
<pre>\directluacode {.*.} * BEFEHL</pre>
<pre>\directselect {¹.} {².} {³.} {⁴.} {⁵.} {⁶.} 1 NAME 2 CONTENT 3 CONTENT 4 CONTENT 5 CONTENT 6 CONTENT OPT OPT OPT OPT OPT</pre>
<pre>\directsetbar {.*.} * NAME</pre>
<pre>\directsetup {.*.} * NAME</pre>

<pre> \directsymbol {...} {...} 1 NAME 2 NAME </pre>
<pre> \directvspacing {...,*...} * inherits: \vspacing </pre>
<pre> \dis {...} * CONTENT </pre>
<pre> \disabledirectives [...,*...] * NAME </pre>
<pre> \disableexperiments [...,*...] * NAME </pre>
<pre> \disablemode [...,*...] * NAME </pre>
<pre> \disableoutputstream </pre>
<pre> \disableparpositions </pre>
<pre> \disableregime </pre>
<pre> \disabletrackers [...,*...] * NAME </pre>
<pre> \displaymath {...} * CONTENT </pre>
<pre> \displaymathematics {...} * CONTENT </pre>
<pre> \displaymessage {...} * TEXT </pre>
<pre> \distributedhsize {...} {...} {...} 1 DIMENSION 2 DIMENSION 3 NUMMER </pre>
<pre> \dividedsize {...} {...} {...} 1 DIMENSION 2 DIMENSION 3 NUMMER </pre>
<pre> \doadaptleftskip {...} * da nu standard DIMENSION </pre>
<pre> \doadaptrightskip {...} * da nu standard DIMENSION </pre>
<pre> \doaddfeature {...,*...} * NAME </pre>

`\doassign [..1.] [..2..]`

- 1 TEXT
- 2 KEY = VALUE

`\doassignempty [..1.] [..2..]`

- 1 TEXT
- 2 KEY = VALUE

`\doboundtext {...1.} {...2.} {...3.}`

- 1 TEXT
- 2 DIMENSION
- 3 BEFEHL

`\docheckassignment {...*}`

- * TEXT

`\docheckedpagestate {...1.} {...2.} {...3.} {...4.} {...5.} {...6.} {...7.}`

- 1 REFERENCE
- 2 BEFEHL
- 3 BEFEHL
- 4 BEFEHL
- 5 BEFEHL
- 6 BEFEHL
- 7 BEFEHL

`\docheckedpair {...*,...}`

- * TEXT

`\documentvariable {...*}`

- * KEY

`\dodoubleargument \..1. [..2.] [..3.]`

- 1 CSNAME
- 2 TEXT
- 3 TEXT

`\dodoubleargumentwithset \..1. [...2,...2] [..3.]`

- 1 CSNAME
- 2 TEXT
- 3 TEXT

`\dodoubleempty \..1. [...2.] [...3.]`

- 1 CSNAME
- 2 TEXT
- 3 TEXT

`\dodoubleemptywithset \..1. [...2,...2] [...3.]`

- 1 CSNAME
- 2 TEXT
- 3 TEXT

`\dodoublegroupempty \..1. {...2.} {...3.}`

- 1 CSNAME
- 2 TEXT
- 3 TEXT

`\doeassign [..1.] [..2..]`

- 1 TEXT
- 2 KEY = VALUE

`\doexpandedrecurse {...1.} {...2.}`

- 1 NUMMER
- 2 BEFEHL

\dofastloopcs {...} \²...

- 1 NUMBER
- 2 CSNAME

\dogetattribute {...}

- * NAME

\dogetattributeid {...}

- * NAME

\dogetcommacommandelement ¹... \from ²... \to ³...

- 1 NUMBER
- 2 TEXT
- 3 CSNAME

\dogobbledoubleempty [¹...] [²...]

- 1 TEXT OPT
- 2 TEXT OPT

\dogobblesingleempty [...]

- * TEXT OPT

\doif {...¹} {...²} {...³}

- 1 CONTENT
- 2 CONTENT
- 3 TRUE

\doifallcommon {...,¹...} {...,²...} {...³}

- 1 TEXT
- 2 TEXT
- 3 TRUE

\doifallcommonelse {...,¹...} {...,²...} {...³} {...⁴}

- 1 TEXT
- 2 TEXT
- 3 TRUE
- 4 FALSE

\doifalldefinedelse {...,¹...} {...²} {...³}

- 1 NAME
- 2 TRUE
- 3 FALSE

\doifallmodes {...,¹...} {...²} {...³}

- 1 NAME
- 2 TRUE
- 3 FALSE

\doifallmodeselse {...,¹...} {...²} {...³}

- 1 NAME
- 2 TRUE
- 3 FALSE

\doifassignmentelse {...¹} {...²} {...³}

- 1 TEXT
- 2 TRUE
- 3 FALSE

\doifblackelse {...¹} {...²} {...³}

- 1 COLOR
- 2 TRUE
- 3 FALSE

`\doifbothsides {1.} {2.} {3.}`

1 BEFEHL
2 BEFEHL
3 BEFEHL

`\doifbothsidesoverruled {1.} {2.} {3.}`

1 BEFEHL
2 BEFEHL
3 BEFEHL

`\doifboxelse {1.} {2.} {3.} {4.}`

1 NAME
2 NAME
3 TRUE
4 FALSE

`\doifbufferelse {1.} {2.} {3.}`

1 BUFFER
2 TRUE
3 FALSE

`\doifcolor {1.} {2.}`

1 COLOR
2 TRUE

`\doifcolorelse {1.} {2.} {3.}`

1 COLOR
2 TRUE
3 FALSE

`\doifcommandhandler \1. {2.} {3.}`

1 CSNAME
2 NAME
3 TRUE

`\doifcommandhandlerelse \1. {2.} {3.} {4.}`

1 CSNAME
2 NAME
3 TRUE
4 FALSE

`\doifcommon {...1,...} {...2,...} {3.}`

1 TEXT
2 TEXT
3 TRUE

`\doifcommonelse {...1,...} {...2,...} {3.} {4.}`

1 TEXT
2 TEXT
3 TRUE
4 FALSE

`\doifcontent {1.} {2.} {3.} \4. {5.}`

1 BEFEHL
2 BEFEHL
3 BEFEHL
4 CSNAME
5 CONTENT

`\doifconversiondefinedelse {1.} {2.} {3.}`

1 NAME
2 TRUE
3 FALSE

`\doifconversionnumberelse {..} {..} {..} {..}`

1 NAME
2 NUMMER
3 TRUE
4 FALSE

`\doifcounter {..} {..}`

1 NAME
2 TRUE

`\doifcounterelse {..} {..} {..}`

1 NAME
2 TRUE
3 FALSE

`\doifcurrentfonthasfeatureelse {..} {..} {..}`

1 NAME
2 TRUE
3 FALSE

`\doifdefined {..} {..}`

1 NAME
2 TRUE

`\doifdefinedcounter {..} {..}`

1 NAME
2 TRUE

`\doifdefinedcounterelse {..} {..} {..}`

1 NAME
2 TRUE
3 FALSE

`\doifdefinedelse {..} {..} {..}`

1 NAME
2 TRUE
3 FALSE

`\doifdimensionelse {..} {..} {..}`

1 TEXT
2 TRUE
3 FALSE

`\doifdimenstringelse {..} {..} {..}`

1 TEXT
2 TRUE
3 FALSE

`\doifdocumentargument {..} {..}`

1 NAME
2 TRUE

`\doifdocumentargumentelse {..} {..} {..}`

1 NAME
2 TRUE
3 FALSE

`\doifdocumentfilename {..} {..}`

1 NUMMER
2 TRUE

```
\doifdocumentfilenameelse {...} {...} {...}
```

```
1 NUMBER  
2 TRUE  
3 FALSE
```

```
\doifdrawingblackelse {...} {...}
```

```
1 TRUE  
2 FALSE
```

```
\doifelse {...} {...} {...} {...}
```

```
1 CONTENT  
2 CONTENT  
3 TRUE  
4 FALSE
```

```
\doifelseallcommon {...1,...} {...2,...} {...3} {...4}
```

```
1 TEXT  
2 TEXT  
3 TRUE  
4 FALSE
```

```
\doifelsealldefined {...1,...} {...2} {...3}
```

```
1 NAME  
2 TRUE  
3 FALSE
```

```
\doifelseallmodes {...1,...} {...2} {...3}
```

```
1 NAME  
2 TRUE  
3 FALSE
```

```
\doifelseassignment {...1} {...2} {...3}
```

```
1 TEXT  
2 TRUE  
3 FALSE
```

```
\doifelseblack {...1} {...2} {...3}
```

```
1 COLOR  
2 TRUE  
3 FALSE
```

```
\doifelsebox {...1} {...2} {...3} {...4}
```

```
1 NAME  
2 NAME  
3 TRUE  
4 FALSE
```

```
\doifelseboxincache {...1} {...2} {...3} {...4}
```

```
1 NAME  
2 NUMBER TEXT  
3 TRUE  
4 FALSE
```

```
\doifelsebuffer {...1} {...2} {...3}
```

```
1 BUFFER  
2 TRUE  
3 FALSE
```

```
\doifelsecolor {...1} {...2} {...3}
```

```
1 COLOR  
2 TRUE  
3 FALSE
```

\doifelsecommandhandler \¹... {²...} {³...} {⁴...}

- 1 CSNAME
- 2 NAME
- 3 TRUE
- 4 FALSE

\doifelsecommon {¹...,²...} {³...} {⁴...}

- 1 TEXT
- 2 TEXT
- 3 TRUE
- 4 FALSE

\doifelseconversiondefined {¹...} {²...} {³...}

- 1 NAME
- 2 TRUE
- 3 FALSE

\doifelseconversionnumber {¹...} {²...} {³...} {⁴...}

- 1 NAME
- 2 NUMBER
- 3 TRUE
- 4 FALSE

\doifelsecounter {¹...} {²...} {³...}

- 1 NAME
- 2 TRUE
- 3 FALSE

\doifelsecurrentfonthasfeature {¹...} {²...} {³...}

- 1 NAME
- 2 TRUE
- 3 FALSE

\doifelsecurrentsortingused {¹...} {²...}

- 1 TRUE
- 2 FALSE

\doifelsecurrentsynonymshown {¹...} {²...}

- 1 TRUE
- 2 FALSE

\doifelsecurrentsynonymused {¹...} {²...}

- 1 TRUE
- 2 FALSE

\doifelsedefined {¹...} {²...} {³...}

- 1 NAME
- 2 TRUE
- 3 FALSE

\doifelsedefinedcounter {¹...} {²...} {³...}

- 1 NAME
- 2 TRUE
- 3 FALSE

\doifelsedimension {¹...} {²...} {³...}

- 1 TEXT
- 2 TRUE
- 3 FALSE

\doifelsedimenstring {¹...} {²...} {³...}

- 1 TEXT
- 2 TRUE
- 3 FALSE

`\doifelsedocumentargument {...} {...} {...}`

1 NAME
2 TRUE
3 FALSE

`\doifelsedocumentfilename {...} {...} {...}`

1 NUMMER
2 TRUE
3 FALSE

`\doifelsedrawingblack {...} {...}`

1 TRUE
2 FALSE

`\doifelseempty {...} {...} {...}`

1 CONTENT
2 TRUE
3 FALSE

`\doifelseemptyvalue {...} {...} {...}`

1 NAME
2 TRUE
3 FALSE

`\doifelseemptyvariable {...} {...} {...} {...}`

1 NAME
2 KEY
3 TRUE
4 FALSE

`\doifelseenv {...} {...} {...}`

1 KEY
2 TRUE
3 FALSE

`\doifelsefastoptionalcheck {...} {...}`

1 TRUE
2 FALSE

`\doifelsefastoptionalcheckcs \^1... \^2..`

1 CSNAME
2 CSNAME

`\doifelsefieldbody {...} {...} {...}`

1 NAME
2 TRUE
3 FALSE

`\doifelsefieldcategory {...} {...} {...}`

1 NAME
2 TRUE
3 FALSE

`\doifelsefigure {...} {...} {...}`

1 FILE
2 TRUE
3 FALSE

`\doifelsefile {...} {...} {...}`

1 FILE
2 TRUE
3 FALSE

`\doifelsefiledefined {1.} {2.} {3.}`

1 NAME
2 TRUE
3 FALSE

`\doifelsefileexists {1.} {2.} {3.}`

1 FILE
2 TRUE
3 FALSE

`\doifelsefirstchar {1.} {2.} {3.} {4.}`

1 TEXT
2 TEXT
3 TRUE
4 FALSE

`\doifelseflagged {1.} {2.} {3.}`

1 NAME
2 TRUE
3 FALSE

`\doifelsefontchar {1.} {2.} {3.} {4.}`

1 FONT
2 NUMMER
3 TRUE
4 FALSE

`\doifelsefontfeature {1.} {2.} {3.}`

1 NAME
2 TRUE
3 FALSE

`\doifelsefontpresent {1.} {2.} {3.}`

1 FONT
2 TRUE
3 FALSE

`\doifelsefontsynonym {1.} {2.} {3.}`

1 NAME
2 TRUE
3 FALSE

`\doifelsehasspace {1.} {2.} {3.}`

1 TEXT
2 TRUE
3 FALSE

`\doifelsehelp {1.} {2.}`

1 TRUE
2 FALSE

`\doifelseincsname {1.} {2.} {3.} {4.}`

1 TEXT
2 CSNAME
3 TRUE
4 FALSE

`\doifelseinelement {1.} {2.} {3.}`

1 NAME
2 TRUE
3 FALSE

`\doifelseinputfile {..} {..} {..}`

1 FILE
2 TRUE
3 FALSE

`\doifelseinsertion {..} {..} {..}`

1 NAME
2 TRUE
3 FALSE

`\doifelseinset {..} {..., ...} {..} {..}`

1 TEXT
2 TEXT
3 TRUE
4 FALSE

`\doifelseinstring {..} {..} {..} {..}`

1 TEXT
2 TEXT
3 TRUE
4 FALSE

`\doifelseinsymbolset {..} {..} {..} {..}`

1 NAME
2 NAME
3 TRUE
4 FALSE

`\doifelseintoks {..} {..} {..} {..}`

1 BEFEHL
2 BEFEHL
3 TRUE
4 FALSE

`\doifelseintwopassdata {..} {..} {..} {..}`

1 NAME
2 NAME
3 TRUE
4 FALSE

`\doifelseitalic {..} {..}`

1 TRUE
2 FALSE

`\doifelselanguage {..} {..} {..}`

1 SPRACHE
2 TRUE
3 FALSE

`\doifelselayerdata {..} {..} {..}`

1 NAME
2 TRUE
3 FALSE

`\doifelselayoutdefined {..} {..} {..}`

1 NAME
2 TRUE
3 FALSE

`\doifelselayoutsomeline {..} {..} {..}`

1 NAME
2 TRUE
3 FALSE

`\doifselayouttextline {...} {...} {...}`

1 NAME
2 TRUE
3 FALSE

`\doifseleapyear {...} {...} {...}`

1 NUMMER
2 TRUE
3 FALSE

`\doifselist {...} {...} {...}`

1 LISTE
2 TRUE
3 FALSE

`\doifselocation {...} {...}`

1 TRUE
2 FALSE

`\doifselocfile {...} {...} {...}`

1 FILE
2 TRUE
3 FALSE

`\doifseMPgraphic {...} {...} {...}`

1 NAME
2 TRUE
3 FALSE

`\doifsemainfloatbody {...} {...}`

1 TRUE
2 FALSE

`\doifsemarkedpage {...} {...} {...}`

1 NAME
2 TRUE
3 FALSE

`\doifsemarking {...} {...} {...}`

1 BESCHRIFTUNG
2 TRUE
3 FALSE

`\doifsemeaning \1... \2... {...} {...}`

1 CSNAME
2 CSNAME
3 TRUE
4 FALSE

`\doifsemessage {...} {...} {...} {...}`

1 NAME
2 NAME NUMBER
3 TRUE
4 FALSE

`\doifsemode {...1,...} {...} {...}`

1 NAME
2 TRUE
3 FALSE

`\doifsenextbgroup {...} {...}`

1 TRUE
2 FALSE

`\doifelsenextbgroupcs \1 \2`

- 1 CSNAME
- 2 CSNAME

`\doifelsenextchar {1} {2} {3}`

- 1 CHARACTER
- 2 TRUE
- 3 FALSE

`\doifelsenextoptional {1} {2}`

- 1 TRUE
- 2 FALSE

`\doifelsenextoptionalcs \1 \2`

- 1 CSNAME
- 2 CSNAME

`\doifelsenextparenthesis {1} {2}`

- 1 TRUE
- 2 FALSE

`\doifelsenonzeropositive {1} {2} {3}`

- 1 NUMMER
- 2 TRUE
- 3 FALSE

`\doifelsenoteonsamepage {1} {2} {3}`

- 1 NAME
- 2 TRUE
- 3 FALSE

`\doifelsenothing {1} {2} {3}`

- 1 TEXT
- 2 TRUE
- 3 FALSE

`\doifelsenumber {1} {2} {3}`

- 1 TEXT
- 2 TRUE
- 3 FALSE

`\doifelseobjectfound {1} {2} {3} {4}`

- 1 NAME
- 2 NAME
- 3 TRUE
- 4 FALSE

`\doifelseobjectreferencefound {1} {2} {3} {4}`

- 1 NAME
- 2 NAME
- 3 TRUE
- 4 FALSE

`\doifelseoddpge {1} {2}`

- 1 BEFEHL
- 2 BEFEHL

`\doifelseoddpgefloat {1} {2}`

- 1 TRUE
- 2 FALSE

`\doifelseoldercontext {...} {...} {...}`

- 1 NUMBER
- 2 TRUE
- 3 FALSE

`\doifelseolderversion {...} {...} {...} {...}`

- 1 NUMBER
- 2 NUMBER
- 3 TRUE
- 4 FALSE

`\doifelseoverlapping {...} {...} {...} {...}`

- 1 NAME
- 2 NAME
- 3 TRUE
- 4 FALSE

`\doifelseoverlay {...} {...} {...}`

- 1 NAME
- 2 TRUE
- 3 FALSE

`\doifelseparallel {...} {...,2...} {...} {...}`

- 1 NAME
- 2 NAME tot
- 3 TRUE
- 4 FALSE

`\doifelseparentfile {...} {...} {...}`

- 1 FILE
- 2 TRUE
- 3 FALSE

`\doifelsepath {...} {...} {...}`

- 1 PATH
- 2 TRUE
- 3 FALSE

`\doifelsepathexists {...} {...} {...}`

- 1 PATH
- 2 TRUE
- 3 FALSE

`\doifelsepatterns {...} {...} {...}`

- 1 SPRACHE
- 2 TRUE
- 3 FALSE

`\doifelseposition {...} {...} {...}`

- 1 NAME
- 2 TRUE
- 3 FALSE

`\doifelsepositionaction {...} {...} {...}`

- 1 NAME
- 2 TRUE
- 3 FALSE

`\doifelsepositiononpage {...} {...} {...} {...}`

- 1 NAME
- 2 NUMMER
- 3 TRUE
- 4 FALSE

\doifelsepositionsonsamepage {...¹,...} {...²} {...³}

- 1 NAME
- 2 TRUE
- 3 FALSE

\doifelsepositionsonthispage {...¹,...} {...²} {...³}

- 1 NAME
- 2 TRUE
- 3 FALSE

\doifelsepositionsused {...¹} {...²}

- 1 TRUE
- 2 FALSE

\doifelserreferencefound {...¹} {...²} {...³}

- 1 REFERENCE
- 2 TRUE
- 3 FALSE

\doifelserightpagefloat {...¹} {...²}

- 1 TRUE
- 2 FALSE

\doifelserighttoleftinbox ...¹ {...²} {...³}

- 1 CSNAME NUMBER
- 2 TRUE
- 3 FALSE

\doifelsesamelinereference {...¹} {...²} {...³}

- 1 REFERENCE
- 2 TRUE
- 3 FALSE

\doifelsesamestring {...¹} {...²} {...³} {...⁴}

- 1 TEXT
- 2 TEXT
- 3 TRUE
- 4 FALSE

\doifelsesetups {...¹} {...²} {...³}

- 1 NAME
- 2 TRUE
- 3 FALSE

\doifelsesomebackground {...¹} {...²} {...³}

- 1 NAME
- 2 TRUE
- 3 FALSE

\doifelsesomespace {...¹} {...²} {...³}

- 1 TEXT
- 2 TRUE
- 3 FALSE

\doifelsesomething {...¹} {...²} {...³}

- 1 TEXT
- 2 TRUE
- 3 FALSE

\doifelsesometoks \...¹ {...²} {...³}

- 1 CSNAME
- 2 TRUE
- 3 FALSE

`\doifelsestringinstring {..} {..} {..} {..}`

1 TEXT
2 TEXT
3 TRUE
4 FALSE

`\doifelsestructurelisthasnumber {..} {..}`

1 TRUE
2 FALSE

`\doifelsestructurelisthaspage {..} {..}`

1 TRUE
2 FALSE

`\doifelsesymboldefined {..} {..} {..}`

1 NAME
2 TRUE
3 FALSE

`\doifelsesymbolset {..} {..} {..}`

1 NAME
2 TRUE
3 FALSE

`\doifelsetext {..} {..} {..}`

1 TEXT
2 TRUE
3 FALSE

`\doifelsetextflow {..} {..} {..}`

1 NAME
2 TRUE
3 FALSE

`\doifelsetextflowcollector {..} {..} {..}`

1 NAME
2 TRUE
3 FALSE

`\doifelsetopofpage {..} {..}`

1 TRUE
2 FALSE

`\doifelsetypingfile {..} {..} {..}`

1 FILE
2 TRUE
3 FALSE

`\doifelseundefined {..} {..} {..}`

1 NAME
2 TRUE
3 FALSE

`\doifelseurldefined {..} {..} {..}`

1 NAME
2 TRUE
3 FALSE

`\doifelsevalue {..} {..} {..} {..}`

1 NAME
2 TEXT
3 TRUE
4 FALSE

```
\doifelsevaluenothing {...} {...} {...}
```

- 1 NAME
- 2 TRUE
- 3 FALSE

```
\doifelsevariable {...} {...} {...} {...}
```

- 1 NAME
- 2 KEY
- 3 TRUE
- 4 FALSE

```
\doifempty {...} {...}
```

- 1 CONTENT
- 2 TRUE

```
\doifemptyelse {...} {...} {...}
```

- 1 CONTENT
- 2 TRUE
- 3 FALSE

```
\doifemptytoks \... {...}
```

- 1 CSNAME
- 2 TRUE

```
\doifemptyvalue {...} {...}
```

- 1 NAME
- 2 TRUE

```
\doifemptyvalueelse {...} {...} {...}
```

- 1 NAME
- 2 TRUE
- 3 FALSE

```
\doifemptyvariable {...} {...} {...}
```

- 1 NAME
- 2 KEY
- 3 TRUE

```
\doifemptyvariableelse {...} {...} {...} {...}
```

- 1 NAME
- 2 KEY
- 3 TRUE
- 4 FALSE

```
\doifenv {...} {...}
```

- 1 KEY
- 2 TRUE

```
\doifenvelse {...} {...} {...}
```

- 1 KEY
- 2 TRUE
- 3 FALSE

```
\doiffastoptionalcheckcselse \... \...
```

- 1 CSNAME
- 2 CSNAME

```
\doiffastoptionalcheckelse {...} {...}
```

- 1 TRUE
- 2 FALSE

`\doiffielddbodyelse {1.} {2.} {3.}`

1 NAME
2 TRUE
3 FALSE

`\doiffielddcategoryelse {1.} {2.} {3.}`

1 NAME
2 TRUE
3 FALSE

`\doiffigureelse {1.} {2.} {3.}`

1 FILE
2 TRUE
3 FALSE

`\doiffile {1.} {2.}`

1 FILE
2 TRUE

`\doiffiledefinedelse {1.} {2.} {3.}`

1 NAME
2 TRUE
3 FALSE

`\doiffileelse {1.} {2.} {3.}`

1 FILE
2 TRUE
3 FALSE

`\doiffileexistselse {1.} {2.} {3.}`

1 FILE
2 TRUE
3 FALSE

`\doiffirstcharelse {1.} {2.} {3.} {4.}`

1 TEXT
2 TEXT
3 TRUE
4 FALSE

`\doifflaggedelse {1.} {2.} {3.}`

1 NAME
2 TRUE
3 FALSE

`\doiffontcharelse {1.} {2.} {3.} {4.}`

1 FONT
2 NUMBER
3 TRUE
4 FALSE

`\doiffontfeatureelse {1.} {2.} {3.}`

1 NAME
2 TRUE
3 FALSE

`\doiffontpresentelse {1.} {2.} {3.}`

1 FONT
2 TRUE
3 FALSE

`\doiffontsynonymelse {1.} {2.} {3.}`

1 NAME
2 TRUE
3 FALSE

`\doifhasspaceelse {..} {..} {..}`

- 1 TEXT
- 2 TRUE
- 3 FALSE

`\doifhelpelse {..} {..}`

- 1 TRUE
- 2 FALSE

`\doifincsnameelse {..} {..} {..} {..}`

- 1 TEXT
- 2 CSNAME
- 3 TRUE
- 4 FALSE

`\doifinelementelse {..} {..} {..}`

- 1 NAME
- 2 TRUE
- 3 FALSE

`\doifinputfileelse {..} {..} {..}`

- 1 FILE
- 2 TRUE
- 3 FALSE

`\doifinsertionelse {..} {..} {..}`

- 1 NAME
- 2 TRUE
- 3 FALSE

`\doifinset {..} {..., ...} {..}`

- 1 TEXT
- 2 TEXT
- 3 TRUE

`\doifinsetelse {..} {..., ...} {..} {..}`

- 1 TEXT
- 2 TEXT
- 3 TRUE
- 4 FALSE

`\doifinstring {..} {..} {..}`

- 1 TEXT
- 2 TEXT
- 3 TRUE

`\doifinstringelse {..} {..} {..} {..}`

- 1 TEXT
- 2 TEXT
- 3 TRUE
- 4 FALSE

`\doifinsymbolset {..} {..} {..} {..}`

- 1 NAME
- 2 NAME
- 3 TRUE
- 4 FALSE

`\doifinsymbolsetelse {..} {..} {..} {..}`

- 1 NAME
- 2 NAME
- 3 TRUE
- 4 FALSE

`\doifintokselse {..} {..} {..} {..}`

- 1 BEFEHL
- 2 BEFEHL
- 3 TRUE
- 4 FALSE

`\doifintwopassdataelse {..} {..} {..} {..}`

- 1 NAME
- 2 NAME
- 3 TRUE
- 4 FALSE

`\doifitalicelse {..} {..}`

- 1 TRUE
- 2 FALSE

`\doiflanguageelse {..} {..} {..}`

- 1 SPRACHE
- 2 TRUE
- 3 FALSE

`\doiflayerdataelse {..} {..} {..}`

- 1 NAME
- 2 TRUE
- 3 FALSE

`\doiflayoutdefinedelse {..} {..} {..}`

- 1 NAME
- 2 TRUE
- 3 FALSE

`\doiflayoutsomelineelse {..} {..} {..}`

- 1 NAME
- 2 TRUE
- 3 FALSE

`\doiflayouttextlineelse {..} {..} {..}`

- 1 NAME
- 2 TRUE
- 3 FALSE

`\doifleapyearelse {..} {..} {..}`

- 1 NUMMER
- 2 TRUE
- 3 FALSE

`\doiflistelse {..} {..} {..}`

- 1 LISTE
- 2 TRUE
- 3 FALSE

`\doiflocationelse {..} {..}`

- 1 TRUE
- 2 FALSE

`\doiflocfileelse {..} {..} {..}`

- 1 FILE
- 2 TRUE
- 3 FALSE

`\doifMPgraphicelse {..} {..} {..}`

- 1 NAME
- 2 TRUE
- 3 FALSE

`\doifmainfloatbodyelse {1.} {2.}`

- 1 TRUE
- 2 FALSE

`\doifmarkingelse {1.} {2.} {3.}`

- 1 BESCHRIFTUNG
- 2 TRUE
- 3 FALSE

`\doifmeaningelse \1... \2... {3.} {4.}`

- 1 CSNAME
- 2 CSNAME
- 3 TRUE
- 4 FALSE

`\doifmessageelse {1.} {2.} {3.} {4.}`

- 1 NAME
- 2 NAME NUMMER
- 3 TRUE
- 4 FALSE

`\doifmode {...1,...} {2.}`

- 1 NAME
- 2 TRUE

`\doifmodeelse {...1,...} {2.} {3.}`

- 1 NAME
- 2 TRUE
- 3 FALSE

`\doifnextbgroupcelse \1... \2...`

- 1 CSNAME
- 2 CSNAME

`\doifnextbgroupelse {1.} {2.}`

- 1 TRUE
- 2 FALSE

`\doifnextcharelse {1.} {2.} {3.}`

- 1 CHARACTER
- 2 TRUE
- 3 FALSE

`\doifnextoptionalcelse \1... \2...`

- 1 CSNAME
- 2 CSNAME

`\doifnextoptionalelse {1.} {2.}`

- 1 TRUE
- 2 FALSE

`\doifnextparenthesiselse {1.} {2.}`

- 1 TRUE
- 2 FALSE

`\doifnonzeropositiveelse {1.} {2.} {3.}`

- 1 NUMMER
- 2 TRUE
- 3 FALSE

`\doifnot {1.} {2.} {3.}`

- 1 CONTENT
- 2 CONTENT
- 3 TRUE


```
\doifnotallcommon {...1,...} {...2,...} {...3}
```

```
1 TEXT  
2 TEXT  
3 TRUE
```

```
\doifnotallmodes {...1,...} {...2} {...3}
```

```
1 NAME  
2 TRUE  
3 FALSE
```

```
\doifnotcommandhandler \.1 {...2} {...3}
```

```
1 CSNAME  
2 NAME  
3 TRUE
```

```
\doifnotcommon {...1,...} {...2,...} {...3}
```

```
1 TEXT  
2 TEXT  
3 TRUE
```

```
\doifnotcounter {...1} {...2}
```

```
1 NAME  
2 TRUE
```

```
\doifnotdocumentargument {...1} {...2}
```

```
1 NAME  
2 TRUE
```

```
\doifnotdocumentfilename {...1} {...2}
```

```
1 NUMBER  
2 TRUE
```

```
\doifnotempty {...1} {...2}
```

```
1 CONTENT  
2 TRUE
```

```
\doifnotemptyvalue {...1} {...2}
```

```
1 NAME  
2 TRUE
```

```
\doifnotemptyvariable {...1} {...2} {...3}
```

```
1 NAME  
2 KEY  
3 TRUE
```

```
\doifnotenv {...1} {...2}
```

```
1 KEY  
2 TRUE
```

```
\doifnoteonsamepageelse {...1} {...2} {...3}
```

```
1 NAME  
2 TRUE  
3 FALSE
```

```
\doifnotescollected {...1} {...2}
```

```
1 NAME  
2 TRUE
```

```
\doifnotfile {...1} {...2}
```

```
1 FILE  
2 TRUE
```

`\doifnotflagged {..} {..}`

1 NAME
2 TRUE

`\doifnothing {..} {..}`

1 TEXT
2 TRUE

`\doifnothingelse {..} {..} {..}`

1 TEXT
2 TRUE
3 FALSE

`\doifnotinset {..} {...2,...} {..3}`

1 TEXT
2 TEXT
3 TRUE

`\doifnotinfloat {.*}`

* TRUE

`\doifnotinstring {..} {..} {..}`

1 TEXT
2 TEXT
3 TRUE

`\doifnotmode {...1,...} {..}`

1 NAME
2 TRUE

`\doifnotnumber {..} {..}`

1 TEXT
2 TRUE

`\doifnotsamestring {..} {..} {..}`

1 TEXT
2 TEXT
3 TRUE

`\doifnotsetups {..} {..}`

1 NAME
2 TRUE

`\doifnotvalue {..} {..} {..}`

1 NAME
2 TEXT
3 TRUE

`\doifnotvariable {..} {..} {..}`

1 NAME
2 KEY
3 TRUE

`\doifnumber {..} {..}`

1 TEXT
2 TRUE

`\doifnumberelse {..} {..} {..}`

1 TEXT
2 TRUE
3 FALSE

`\doifobjectfoundelse {..} {..} {..} {..}`

- 1 NAME
- 2 NAME
- 3 TRUE
- 4 FALSE

`\doifobjectreferencefoundelse {..} {..} {..} {..}`

- 1 NAME
- 2 NAME
- 3 TRUE
- 4 FALSE

`\doifoddpagelse {..} {..}`

- 1 BEFEHL
- 2 BEFEHL

`\doifoddpagefloatelse {..} {..}`

- 1 TRUE
- 2 FALSE

`\doifoldercontextelse {..} {..} {..}`

- 1 NUMBER
- 2 TRUE
- 3 FALSE

`\doifolderversionelse {..} {..} {..} {..}`

- 1 NUMBER
- 2 NUMBER
- 3 TRUE
- 4 FALSE

`\doifoverlappingelse {..} {..} {..} {..}`

- 1 NAME
- 2 NAME
- 3 TRUE
- 4 FALSE

`\doifoverlayelse {..} {..} {..}`

- 1 NAME
- 2 TRUE
- 3 FALSE

`\doifparallelelse {..} {...2,...} {..} {..}`

- 1 NAME
- 2 NAME tot
- 3 TRUE
- 4 FALSE

`\doifparentfileelse {..} {..} {..}`

- 1 FILE
- 2 TRUE
- 3 FALSE

`\doifpathelse {..} {..} {..}`

- 1 PATH
- 2 TRUE
- 3 FALSE

`\doifpathexistselse {..} {..} {..}`

- 1 PATH
- 2 TRUE
- 3 FALSE

`\doifpatternelse {1.} {2.} {3.}`

- 1 SPRACHE
- 2 TRUE
- 3 FALSE

`\doifposition {1.} {2.} {3.}`

- 1 NAME
- 2 TRUE
- 3 FALSE

`\doifpositionaction {1.} {2.} {3.}`

- 1 NAME
- 2 TRUE
- 3 FALSE

`\doifpositionactionelse {1.} {2.} {3.}`

- 1 NAME
- 2 TRUE
- 3 FALSE

`\doifpositionelse {1.} {2.} {3.}`

- 1 NAME
- 2 TRUE
- 3 FALSE

`\doifpositiononpageelse {1.} {2.} {3.} {4.}`

- 1 NAME
- 2 NUMBER
- 3 TRUE
- 4 FALSE

`\doifpositionsonsamepageelse {1...1,...} {2.} {3.}`

- 1 NAME
- 2 TRUE
- 3 FALSE

`\doifpositionsonthispageelse {1...1,...} {2.} {3.}`

- 1 NAME
- 2 TRUE
- 3 FALSE

`\doifpositionsusedelse {1.} {2.}`

- 1 TRUE
- 2 FALSE

`\doifreferencefoundelse {1.} {2.} {3.}`

- 1 REFERENCE
- 2 TRUE
- 3 FALSE

`\doifrightpagefloatelse {1.} {2.}`

- 1 TRUE
- 2 FALSE

`\doifrighttoleftinboxedelse 1. {2.} {3.}`

- 1 CSNAME NUMBER
- 2 TRUE
- 3 FALSE

`\doifsamelinereferenceelse {1.} {2.} {3.}`

- 1 REFERENCE
- 2 TRUE
- 3 FALSE

`\doifsamestring {1.} {2.} {3.}`

1 TEXT
2 TEXT
3 TRUE

`\doifsamestringelse {1.} {2.} {3.} {4.}`

1 TEXT
2 TEXT
3 TRUE
4 FALSE

`\doifsetups {1.} {2.}`

1 NAME
2 TRUE

`\doifsetupself {1.} {2.} {3.}`

1 NAME
2 TRUE
3 FALSE

`\doifsomebackground {1.} {2.} {3.}`

1 NAME
2 TRUE
3 FALSE

`\doifsomebackgroundelse {1.} {2.} {3.}`

1 NAME
2 TRUE
3 FALSE

`\doifsomespaceelse {1.} {2.} {3.}`

1 TEXT
2 TRUE
3 FALSE

`\doifsomething {1.} {2.}`

1 TEXT
2 TRUE

`\doifsomethingelse {1.} {2.} {3.}`

1 TEXT
2 TRUE
3 FALSE

`\doifsometoks \1. {2.}`

1 CSNAME
2 TRUE

`\doifsometokself \1. {2.} {3.}`

1 CSNAME
2 TRUE
3 FALSE

`\doifstringinstringelse {1.} {2.} {3.} {4.}`

1 TEXT
2 TEXT
3 TRUE
4 FALSE

`\doifstructurelisthasnumberelse {1.} {2.}`

1 TRUE
2 FALSE

`\doifstructurelisthaspageelse {..} {..}`

1 TRUE
2 FALSE

`\doifsymboldefinedelse {..} {..} {..}`

1 NAME
2 TRUE
3 FALSE

`\doifsymbolsetelse {..} {..} {..}`

1 NAME
2 TRUE
3 FALSE

`\doiftext {..} {..} {..}`

1 TEXT
2 TRUE
3 FALSE

`\doiftextelse {..} {..} {..}`

1 TEXT
2 TRUE
3 FALSE

`\doiftextflowcollectorelse {..} {..} {..}`

1 NAME
2 TRUE
3 FALSE

`\doiftextflowelse {..} {..} {..}`

1 NAME
2 TRUE
3 FALSE

`\doiftopofpageelse {..} {..}`

1 TRUE
2 FALSE

`\doiftypingfileelse {..} {..} {..}`

1 FILE
2 TRUE
3 FALSE

`\doifundefined {..} {..}`

1 NAME
2 TRUE

`\doifundefinedcounter {..} {..}`

1 NAME
2 TRUE

`\doifundefinedelse {..} {..} {..}`

1 NAME
2 TRUE
3 FALSE

`\doifunknownfontfeature {..} {..} {..}`

1 NAME
2 TRUE
3 FALSE

`\doifurldefinedelse {1.} {2.} {3.}`

1 NAME
2 TRUE
3 FALSE

`\doifvalue {1.} {2.} {3.}`

1 NAME
2 TEXT
3 TRUE

`\doifvalueelse {1.} {2.} {3.} {4.}`

1 NAME
2 TEXT
3 TRUE
4 FALSE

`\doifvaluenothing {1.} {2.}`

1 NAME
2 TRUE

`\doifvaluenothingelse {1.} {2.} {3.}`

1 NAME
2 TRUE
3 FALSE

`\doifvaluesomething {1.} {2.}`

1 NAME
2 TRUE

`\doifvariable {1.} {2.} {3.}`

1 NAME
2 KEY
3 TRUE

`\doifvariableelse {1.} {2.} {3.} {4.}`

1 NAME
2 KEY
3 TRUE
4 FALSE

`\doindentation`

`\dollar`

`\doloop {*.}`

* BEFEHL

`\doloopoverlist {...1,...} {2.}`

1 TEXT
2 BEFEHL

`\donothing`

`\dontconvertfont`

`\dontleavehmode`

`\dontpermitspacesbetweengroups`

`\dopositionaction {*.}`

* NAME

`\doprocesslocalsetups {...,*...}`

* NAME

`\doquadrupleargument \1... [2...] [3...] [4...] [5...]`

1 CSNAME
2 TEXT
3 TEXT
4 TEXT
5 TEXT

`\doquadrupleempty \1... [2...] [3...] [4...] [5...]`

1 CSNAME OPT OPT OPT OPT
2 TEXT
3 TEXT
4 TEXT
5 TEXT

`\doquadruplegroupempty \1... {2...} {3...} {4...} {5...}`

1 CSNAME OPT OPT OPT OPT
2 TEXT
3 TEXT
4 TEXT
5 TEXT

`\doquintupleargument \1... [2...] [3...] [4...] [5...] [6...]`

1 CSNAME
2 TEXT
3 TEXT
4 TEXT
5 TEXT
6 TEXT

`\doquintupleempty \1... [2...] [3...] [4...] [5...] [6...]`

1 CSNAME OPT OPT OPT OPT OPT
2 TEXT
3 TEXT
4 TEXT
5 TEXT
6 TEXT

`\doquintuplegroupempty \1... {2...} {3...} {4...} {5...} {6...}`

1 CSNAME OPT OPT OPT OPT OPT
2 TEXT
3 TEXT
4 TEXT
5 TEXT
6 TEXT

`\dorechecknextindentation`

`\dorecurse {1...} {2...}`

1 NUMBER
2 BEFEHL

`\dorepeatwithcommand [1...] \2...`

1 TEXT NUMBER*TEXT
2 CSNAME

`\doreplacefeature {...,*...}`

* NAME

`\doresetandafffeature {...,*...}`

* NAME

`\doresetattribute {..}`

* NAME

`\dorotatebox {1.} \2.. {3..}`

1 NUMBER
2 CSNAME
3 CONTENT

`\dosetattribute {1.} {2..}`

1 NAME
2 NUMBER

`\dosetleftskipadaption {..}`

* da nu standard DIMENSION

`\dosetrighskipadaption {..}`

* da nu standard DIMENSION

`\dosetupcheckedinterlinespace {,..,*=,..,..}`

* inherits: \seteazaspatiinterliniar

`\dosetupcheckedinterlinespace {,..,*..}`

* on dezactivat reset auto mic mediu mare NUMBER DIMENSION

`\dosetupcheckedinterlinespace {..}`

* NAME

`\doseventupleargument \1.. [2..] [3..] [4..] [5..] [6..] [7..] [8..]`

1 CSNAME
2 TEXT
3 TEXT
4 TEXT
5 TEXT
6 TEXT
7 TEXT
8 TEXT

`\doseventupleempty \1.. [2..] [3..] [4..] [5..] [6..] [7..] [8..]`

1 CSNAME
2 TEXT
3 TEXT
4 TEXT
5 TEXT
6 TEXT
7 TEXT
8 TEXT

`\dosingleargument \1.. [2..]`

1 CSNAME
2 TEXT

`\dosingleempty \1.. [2..]`

1 CSNAME
2 TEXT

`\dosinglegroupempty \1.. {2..}`

1 CSNAME
2 TEXT

`\dosixtupleargument \1... [2...] [3...] [4...] [5...] [6...] [7]`

- 1 CSNAME
- 2 TEXT
- 3 TEXT
- 4 TEXT
- 5 TEXT
- 6 TEXT
- 7 TEXT

`\dosixtupleempty \1... [2] [3] [4] [5] [6] [7]`

- 1 CSNAME
- 2 TEXT
- 3 TEXT
- 4 TEXT
- 5 TEXT
- 6 TEXT
- 7 TEXT

`\dostarttagged {1.} {2.} ... \dostoptagged`

- 1 NAME
- 2 NAME

`\dostepwiserecurse {1.} {2.} {3.} {4.}`

- 1 NUMBER
- 2 NUMBER
- 3 [-+]NUMBER
- 4 BEFEHL

`\dosubtractfeature {...,*...}`

- * NAME

`\dotfskip {...}`

- * DIMENSION

`\dotoks *...`

- * CSNAME

`\dotripleargument \1... [2] [3] [4]`

- 1 CSNAME
- 2 TEXT
- 3 TEXT
- 4 TEXT

`\dotripleargumentwithset \1... [...,2...] [3] [4]`

- 1 CSNAME
- 2 TEXT
- 3 TEXT
- 4 TEXT

`\dotripleempty \1... [2] [3] [4]`

- 1 CSNAME
- 2 TEXT
- 3 TEXT
- 4 TEXT

`\dotripleemptywithset \1... [...,2...] [3] [4]`

- 1 CSNAME
- 2 TEXT
- 3 TEXT
- 4 TEXT

`\dotriplegroupempty \1... {2.} {3.} {4.}`

- 1 CSNAME
- 2 TEXT
- 3 TEXT
- 4 TEXT

<code>\doublebond</code>
<code>\dowith {...¹,...} {...²}</code> 1 BEFEHL 2 BEFEHL
<code>\dowithnextbox {...¹} \...² {...³}</code> 1 BEFEHL 2 CSNAME 3 CONTENT
<code>\dowithnextboxcontent {...¹} {...²} \...³ {...⁴}</code> 1 BEFEHL 2 BEFEHL 3 CSNAME 4 CONTENT
<code>\dowithnextboxcontentcs \...¹ \...² \...³ {...⁴}</code> 1 CSNAME 2 CSNAME 3 CSNAME 4 CONTENT
<code>\dowithnextboxcs \...¹ \...² {...³}</code> 1 CSNAME 2 CSNAME 3 CONTENT
<code>\dowithpargument *... * CSNAME </code>
<code>\dowithrange {...¹,...} \...²</code> 1 NUMMER NUMMER:NUMMER 2 CSNAME
<code>\dowithwargument *... * CSNAME </code>
<code>\dpofstring {...[*]}</code> * TEXT
<code>\dreapta ... * CHARACTER </code>
<code>\dummydigit</code>
<code>\dummyparameter {...[*]}</code> * KEY
<code>\dute {...¹} [...²]</code> 1 CONTENT 2 REFERENCE
<code>\dutebox {...¹} [...²]</code> 1 CONTENT 2 REFERENCE
<code>\dutepagina {...¹} [...²]</code> 1 TEXT 2 REFERENCE

<code>\ETEX</code>
<code>\EveryLine {...}</code> * BEFEHL
<code>\EveryPar {...}</code> * BEFEHL
<code>\ecran [...*,...]</code> * inherits: $\overline{\text{pagina}}$
<code>\edefconvertedargument \¹... {\²...}</code> 1 CSNAME 2 TEXT
<code>\efcmxheight {...}</code> * NAME
<code>\efcmxwidth {...}</code> * NAME
<code>\efcminheight {...}</code> * NAME
<code>\efcminwidth {...}</code> * NAME
<code>\efcparameter {\¹...} {\²...}</code> 1 NAME 2 KEY
<code>\effect [¹...] {\²...}</code> 1 NAME 2 CONTENT
<code>\elapsedseconds</code>
<code>\elapsedtime</code>
<code>\element [...*,...]</code> * REFERENCE ^{OPT}
<code>\em</code>
<code>\emphasisboldface</code>
<code>\emphasistypeface</code>
<code>\emptylines [[*]...]</code> * NUMMER ^{OPT}
<code>\emspace</code>
<code>\enabledirectives [...*,...]</code> * NAME

<p><code>\enableexperiments [...,*,...]</code> * NAME</p>
<p><code>\enablemode [...,*,...]</code> * NAME</p>
<p><code>\enableoutputstream [...]</code> * NAME</p>
<p><code>\enableparpositions</code></p>
<p><code>\enableregime [...]</code> * cp1250 cp1251 cp1252 cp1253 cp1254 cp1255 cp1256 cp1257 cp1258 8859-1 8859-2 8859-3 8859-4 8859-9 8859-10 8859-13 8859-14 8859-15 8859-16 utf windows-1250 windows-1251 windows-1252 windows-1253 windows-1254 windows-1255 windows-1256 windows-1257 windows-1258 i11 i12 i13 i14 i15 i16 i17 i18 i19 i110 iso-8859-1 iso-8859-2 iso-8859-3 iso-8859-4 iso-8859-9 iso-8859-10 iso-8859-13 iso-8859-14 iso-8859-15 iso-8859-16 latin1 latin2 latin3 latin4 latin5 latin6 latin7 latin8 latin9 latin10 utf-8 utf8 windows</p>
<p><code>\enabletrackers [...,*,...]</code> * NAME</p>
<p><code>\enskip</code></p>
<p><code>\enspace</code></p>
<p><code>\ENUMERARE [...,¹...] {²...} ³... \par</code> 1 REFERENCE OPT OPT 2 TEXT 3 CONTENT</p>
<p><code>\env {...}</code> * KEY</p>
<p><code>\envvar {¹...} {²...}</code> 1 KEY 2 BEFEHL</p>
<p><code>\epos {...}</code> * NAME</p>
<p><code>\equaldigits {...}</code> * TEXT</p>
<p><code>\eTeX</code></p>
<p><code>\ETICHETA [...,¹...] {²...}</code> 1 REFERENCE OPT OPT 2 TEXT</p>
<p><code>\executeifdefined {¹...} {²...}</code> 1 NAME 2 BEFEHL</p>
<p><code>\exitloop</code></p>
<p><code>\exitloopnow</code></p>

`\expandcheckedcsname \1..2..3..`

1 CSNAME
2 KEY
3 TEXT

`\expanded {...}`

* CONTENT

`\expandeddoif {1..2..3..}`

1 CONTENT
2 CONTENT
3 TRUE

`\expandeddoifelse {1..2..3..4..}`

1 CONTENT
2 CONTENT
3 TRUE
4 FALSE

`\expandeddoifnot {1..2..3..}`

1 CONTENT
2 CONTENT
3 TRUE

`\expandfontsynonym \1..2..`

1 CSNAME
2 NAME

`\expdoif {1..2..3..}`

1 CONTENT
2 CONTENT
3 TRUE

`\expdoifcommonelse {...1...} {...2...} {3..} {4..}`

1 TEXT
2 TEXT
3 TRUE
4 FALSE

`\expdoifelse {1..2..3..4..}`

1 CONTENT
2 CONTENT
3 TRUE
4 FALSE

`\expdoifelsecommon {...1...} {...2...} {3..} {4..}`

1 TEXT
2 TEXT
3 TRUE
4 FALSE

`\expdoifelseinset {1..2..3..4..}`

1 TEXT
2 TEXT
3 TRUE
4 FALSE

`\expdoifinsetelse {1..2..3..4..}`

1 TEXT
2 TEXT
3 TRUE
4 FALSE

<pre> \expdoifnot {¹.} {².} {³.} 1 CONTENT 2 CONTENT 3 TRUE </pre>
<pre> \externalfigurecollectionmaxheight {[*].} * NAME </pre>
<pre> \externalfigurecollectionmaxwidth {[*].} * NAME </pre>
<pre> \externalfigurecollectionminheight {[*].} * NAME </pre>
<pre> \externalfigurecollectionminwidth {[*].} * NAME </pre>
<pre> \externalfigurecollectionparameter {¹.} {².} 1 NAME 2 KEY </pre>
<pre> \fakebox [*]. * CSNAME NUMBER </pre>
<pre> \faraliniiantetsisubsol </pre>
<pre> \faraliniisussijos </pre>
<pre> \faraspatiu </pre>
<pre> \fastdecrement \[*]. * CSNAME </pre>
<pre> \fastincrement \[*]. * CSNAME </pre>
<pre> \fastlocalframed [¹.] [²..²..³..] {³.} 1 NAME 2 inherits: \seteazainconjurat 3 CONTENT </pre>
<pre> \fastloopfinal </pre>
<pre> \fastloopindex </pre>
<pre> \fastscale {¹.} {².} 1 NUMBER 2 CONTENT </pre>
<pre> \fastsetup {[*].} * NAME </pre>
<pre> \fastsetupwithargument {¹.} {².} 1 NAME 2 CONTENT </pre>

<pre> \fastsetupwithargumentswapped {...} {...} 1 CONTENT 2 NAME </pre>
<pre> \fastswitchtobodyfont {...} * x xx mic mare script scriptscript </pre>
<pre> \fastxsxy {...} {...} {...} 1 NUMMER 2 NUMMER 3 CONTENT </pre>
<pre> \feature [...] [...²,...] 1 + - = ! > < more less nou reset implicit old local 2 NAME </pre>
<pre> \feature {...} {...²,...} 1 + - = ! > < more less nou reset implicit old local 2 NAME </pre>
<pre> \fence </pre>
<pre> \fenced [...] {...} 1 NAME 2 CONTENT </pre>
<pre> \FENCE {...} * CONTENT </pre>
<pre> \fetchallmarkings [...] [...²] 1 BESCHRIFTUNG 2 pagina NAME </pre>
<pre> \fetchallmarks [...[*]] * BESCHRIFTUNG </pre>
<pre> \fetchmark [...] [...²] 1 BESCHRIFTUNG OPT 2 primul ultim curent precedent urmatorul sus subsol implicit ambele tot first:nocheck last:nocheck previous:nocheck next:nocheck top:nocheck bottom:nocheck </pre>
<pre> \fetchmarking [...] [...²] [...³] 1 BESCHRIFTUNG 2 pagina NAME 3 primul ultim curent precedent urmatorul sus subsol implicit ambele tot first:nocheck last:nocheck previous:nocheck next:nocheck top:nocheck bottom:nocheck </pre>
<pre> \fetchonemark [...] [...²] 1 BESCHRIFTUNG OPT 2 primul ultim curent precedent urmatorul sus subsol implicit ambele tot first:nocheck last:nocheck previous:nocheck next:nocheck top:nocheck bottom:nocheck </pre>
<pre> \fetchonemarking [...] [...²] [...³] 1 BESCHRIFTUNG 2 pagina NAME 3 primul ultim curent precedent urmatorul sus subsol implicit ambele tot first:nocheck last:nocheck previous:nocheck next:nocheck top:nocheck bottom:nocheck </pre>
<pre> \fetchruntinecommand \... {...} 1 CSNAME 2 FILE </pre>

<pre> \fetchtwomarkings [..] [..] 1 BESCHRIFTUNG 2 pagina NAME </pre>
<pre> \fetchtwomarks [..] * BESCHRIFTUNG </pre>
<pre> \fieldbody [..] [..,..<u>2</u>..,..] 1 NAME OPT 2 inherits: \setupfieldbody </pre>
<pre> \fifthoffivearguments {..} {..} {..} {..} {..} 1 TEXT 2 TEXT 3 TEXT 4 TEXT 5 TEXT </pre>
<pre> \fifthofsixarguments {..} {..} {..} {..} {..} {..} 1 TEXT 2 TEXT 3 TEXT 4 TEXT 5 TEXT 6 TEXT </pre>
<pre> \figuraexterna [..] [..<u>2</u>] [..,..<u>3</u>..,..] 1 FILE OPT OPT 2 NAME 3 inherits: \setupexternalfigure </pre>
<pre> \figurefilename </pre>
<pre> \figurefilepath </pre>
<pre> \figurefiletype </pre>
<pre> \figurefullname </pre>
<pre> \figureheight </pre>
<pre> \figurenaturalheight </pre>
<pre> \figurenaturalwidth </pre>
<pre> \figuresymbol [..] [..,..<u>2</u>..,..] 1 FILE NAME OPT 2 inherits: \figuraexterna </pre>
<pre> \figurewidth </pre>
<pre> \filename {..} * FILE </pre>
<pre> \filledhboxb <u>1</u> {..} {..} 1 TEXT OPT 2 CONTENT </pre>

\filledhboxc ¹... {²...}

- 1 TEXT OPT
- 2 CONTENT

\filledhboxg ¹... {²...}

- 1 TEXT OPT
- 2 CONTENT

\filledhboxk ¹... {²...}

- 1 TEXT OPT
- 2 CONTENT

\filledhboxm ¹... {²...}

- 1 TEXT OPT
- 2 CONTENT

\filledhboxr ¹... {²...}

- 1 TEXT OPT
- 2 CONTENT

\filledhboxy ¹... {²...}

- 1 TEXT OPT
- 2 CONTENT

\filler [...]

* sym simbol rigla latime spatiu NAME

\fillupto [¹...] {²...}

- 1 sym simbol rigla latime spatiu NAME
- 2 TEXT

\filterfromnext {¹...} {²...} {³...} {⁴...} {⁵...} {⁶...} {⁷...}

- 1 NUMMER OPT
- 2 NUMMER OPT
- 3 CONTENT OPT
- 4 CONTENT OPT
- 5 CONTENT OPT
- 6 CONTENT OPT
- 7 CONTENT OPT

\filterfromvalue {¹...} {²...} {³...}

- 1 NAME
- 2 NUMMER
- 3 NUMMER

\filterpages [¹...] [...²,...] [...³,...³,...] OPT

- 1 FILE
- 2 par impar NUMMER NUMMER:NUMMER
- 3 latime = DIMENSION
- n = NUMMER
- category = NAME

\filterreference {*...}

* implicit text titlu numar pagina realpage

\findtwopassdata {¹...} {²...}

- 1 NAME
- 2 NAME

```
\finishregisterentry [...1] [...,2...,...] [...,3...,...]
1 NAME
2 eticheta = NAME
  keys = TEXT PROCESSOR->TEXT
  entries = TEXT PROCESSOR->TEXT
  alternativ = TEXT
3 KEY = VALUE
```

```
\firdepar
```

```
\firstcharacter
```

```
\firstcounter [...1] [...2]
1 NAME
2 NUMBER
```

```
\firstcountervalue [...*]
* NAME
```

```
\firstinlist [...*,...]
* BEFEHL
```

```
\firstoffivearguments {...1} {...2} {...3} {...4} {...5}
1 TEXT
2 TEXT
3 TEXT
4 TEXT
5 TEXT
```

```
\firstoffourarguments {...1} {...2} {...3} {...4}
1 TEXT
2 TEXT
3 TEXT
4 TEXT
```

```
\firstofoneargument {...*}
* TEXT
```

```
\firstofoneunexpanded {...*}
* TEXT
```

```
\firstofsixarguments {...1} {...2} {...3} {...4} {...5} {...6}
1 TEXT
2 TEXT
3 TEXT
4 TEXT
5 TEXT
6 TEXT
```

```
\firstofthreearguments {...1} {...2} {...3}
1 TEXT
2 TEXT
3 TEXT
```

```
\firstofthreeunexpanded {...1} {...2} {...3}
1 TEXT
2 TEXT
3 TEXT
```

```
\firstoftwoarguments {...1} {...2}
1 TEXT
2 TEXT
```

<pre> \firstoftwounexpanded {...} {...} 1 TEXT 2 TEXT </pre>
<pre> \firstrealpage </pre>
<pre> \firstrealpagenumber </pre>
<pre> \firstsubcountervalue [...] [...] 1 NAME 2 NUMBER </pre>
<pre> \firstsubpagenumber </pre>
<pre> \firstuserpage </pre>
<pre> \firstuserpagenumber </pre>
<pre> \fitfieldframed [...¹...²...] {...} 1 inherits: \seteazainconj^{at} 2 CONTENT </pre>
<pre> \fittopbaselinegrid {...} * CONTENT </pre>
<pre> \flag {...} * NAME </pre>
<pre> \floatuserdataparameter {...} * KEY </pre>
<pre> \flushbox {...} {...} 1 NAME 2 NAME </pre>
<pre> \flushboxregister ... * CSNAME NUMBER </pre>
<pre> \flushcollector [...] * NAME </pre>
<pre> \flushedrightlastline </pre>
<pre> \flushlayer [...] * NAME </pre>
<pre> \flushlocalfloats </pre>
<pre> \flushnextbox </pre>
<pre> \flushnotes </pre>
<pre> \flushoutputstream [...] * NAME </pre>
<pre> \flushshapebox </pre>

<pre>\flushtextflow {...} * NAME</pre>
<pre>\flushtokens [...] * NAME</pre>
<pre>\flushtoks *.. * CSNAME</pre>
<pre>\folosestebloc [...¹,...] [...²,...] [...³,...³,...] 1 NAME 2 NAME 3 criteriu = text ABSCHNITT</pre>
<pre>\folosestedirector [...*,...] * PATH</pre>
<pre>\folosestedocumentextern [...¹.] [...².] [...³.] 1 NAME 2 FILE 3 TEXT</pre>
<pre>\folosestefiguraexterna [...¹.] [...².] [...³.] [...⁴,...⁴,...] 1 NAME 2 FILE 3 NAME 4 inherits: \setupexternalfigure</pre>
<pre>\folosestemodul [...¹.] [...²,...] [...³,...³,...] 1 m p s x t 2 FILE 3 KEY = VALUE</pre>
<pre>\folosestemuzicaexterna [...¹.] [...².] 1 NAME 2 FILE</pre>
<pre>\folosestescriptJS [...¹.] [...²,...] 1 FILE 2 NAME</pre>
<pre>\folosestesimboluri [...*] * FILE</pre>
<pre>\folosesteURL [...¹.] [...².] [...³.] [...⁴.] 1 NAME 2 URL 3 FILE 4 TEXT</pre>
<pre>\folosesteurl [...¹.] [...².] [...³.] [...⁴.] 1 NAME 2 URL 3 FILE 4 TEXT</pre>
<pre>\fontalternative</pre>
<pre>\fontbody</pre>
<pre>\fontchar {...} * NAME</pre>

<pre> \fontcharbyindex {...} * NUMMER </pre>
<pre> \fontclass </pre>
<pre> \fontclassname {...} {...} 1 NAME 2 FONT </pre>
<pre> \fontface </pre>
<pre> \fontfeaturelist [...¹] [...²] 1 NAME 2 TEXT </pre>
<pre> \fontsize </pre>
<pre> \fontstyle </pre>
<pre> \footnotetext [...¹;...²] {...} 1 REFERENCE OPT 2 TEXT </pre>
<pre> \footnotetext [...[*]...[*]...[*]...[*]...[*]...] * titlu = TEXT * semncarte = TEXT * lista = TEXT * referinta = REFERENCE </pre>
<pre> \forcecharacterstripping </pre>
<pre> \forcelocalfloats </pre>
<pre> \forgeteverypar </pre>
<pre> \forgetparameters [...¹] [...²...²...²...²...] 1 TEXT 2 KEY = VALUE </pre>
<pre> \forgetparskip </pre>
<pre> \forgetragged </pre>
<pre> \formula [...¹;...²] {...} 1 impachetat tight centru incadrat adancime linie jumatatelinie -linie -jumatatelinie inherits: \seteazafonttext 2 CONTENT </pre>
<pre> \foundbox {...¹} {...²} 1 NAME 2 NAME </pre>
<pre> \fourthoffivearguments {...¹} {...²} {...³} {...⁴} {...⁵} 1 TEXT 2 TEXT 3 TEXT 4 TEXT 5 TEXT </pre>

`\fourthoffourarguments {1.} {2.} {3.} {4.}`

1 TEXT
2 TEXT
3 TEXT
4 TEXT

`\fourthofsixarguments {1.} {2.} {3.} {4.} {5.} {6.}`

1 TEXT
2 TEXT
3 TEXT
4 TEXT
5 TEXT
6 TEXT

`\FRACTION {1.} {2.}`

1 CONTENT
2 CONTENT

instances: xfrac xxfrac frac sfrac dfrac binom dbinom tbinom

`\binom {1.} {2.}`

1 CONTENT
2 CONTENT

`\dbinom {1.} {2.}`

1 CONTENT
2 CONTENT

`\dfrac {1.} {2.}`

1 CONTENT
2 CONTENT

`\frac {1.} {2.}`

1 CONTENT
2 CONTENT

`\sfrac {1.} {2.}`

1 CONTENT
2 CONTENT

`\tbinom {1.} {2.}`

1 CONTENT
2 CONTENT

`\xfrac {1.} {2.}`

1 CONTENT
2 CONTENT

`\xxfrac {1.} {2.}`

1 CONTENT
2 CONTENT

`\framed [...1...2...]`

1 inherits: \set@azainconjurat^{OPT}
2 CONTENT

`\frameddimension {*.}`

* KEY

`\framedparameter {*.}`

* KEY

<pre> \FRAMED [...,\¹...,...] {...} 1 inherits: \set@azainconjurat 2 CONTENT instances: unframed fitfieldframed </pre>
<pre> \fitfieldframed [...,\¹...,...] {...} 1 inherits: \set@azainconj^{OPT}at 2 CONTENT </pre>
<pre> \unframed [...,\¹...,...] {...} 1 inherits: \set@azainconjurat 2 CONTENT </pre>
<pre> \freezedimenmacro \¹... \²... 1 CSNAME 2 CSNAME </pre>
<pre> \freezemeasure [¹...] [²...] 1 NAME 2 DIMENSION </pre>
<pre> \frenchspacing </pre>
<pre> \fromlinenote [¹...] [²...] 1 REFERENCE 2 TEXT </pre>
<pre> \frozenhbox {...} * CONTENT </pre>
<pre> \frule .. \[*]... .. \relax * width_{DIMENSION} height_{DIMENSION} depth_{DIMENSION} radius_{DIMENSION} line_{DIMENSION} type_{TEXT} data_{TEXT} name_{TEXT} </pre>
<pre> \fundal {...} * CONTENT </pre>
<pre> \FUNDAL {...} * CONTENT instances: fundal </pre>
<pre> \GetPar </pre>
<pre> \GotoPar </pre>
<pre> \Greeknumerals {...} * NUMMER </pre>
<pre> \gdefconvertedargument \¹... {...} 1 CSNAME 2 TEXT </pre>
<pre> \gdefconvertedcommand \¹... \²... 1 CSNAME 2 CSNAME </pre>
<pre> \getboxfromcache {¹...} {²...} ³... 1 NAME 2 NUMMER TEXT 3 CSNAME NUMMER </pre>

<pre>\getboxllx ... * CSNAME NUMMER</pre>
<pre>\getboxlly ... * CSNAME NUMMER</pre>
<pre>\getbufferdata [...] * BUFFER <small>OPT</small></pre>
<pre>\getcommacommandsize [...,*...] * BEFEHL</pre>
<pre>\getcommalistsize [...,*...] * BEFEHL</pre>
<pre>\getdayoftheweek {...} {...} {...} 1 NUMMER 2 NUMMER 3 NUMMER</pre>
<pre>\getdayspermonth {...} {...} 1 NUMMER 2 NUMMER</pre>
<pre>\getdefinedbuffer [...] * BUFFER</pre>
<pre>\getdocumentargument {...} * NAME</pre>
<pre>\getdocumentargumentdefault {...} {...} 1 NAME 2 TEXT</pre>
<pre>\getdocumentfilename {...} * NUMMER</pre>
<pre>\getdummyparameters [...,*...] * KEY = VALUE</pre>
<pre>\getemptyparameters [...] [...,*...] 1 TEXT 2 KEY = VALUE</pre>
<pre>\getparameters [...] [...,*...] 1 TEXT 2 KEY = VALUE</pre>
<pre>\getexpandedparameters [...] [...,*...] 1 TEXT 2 KEY = VALUE</pre>
<pre>\getfiguredimensions [...] [...,*...] 1 FILE <small>OPT</small> 2 inherits: \setupexternalfigure</pre>
<pre>\getfirstcharacter {...} * TEXT</pre>

<pre>\getfirsttwopassdata {...} * NAME</pre>
<pre>\getfromcommacommand [...¹,...] [...².] 1 BEFEHL 2 NUMMER</pre>
<pre>\getfromcommalist [...¹,...] [...².] 1 BEFEHL 2 NUMMER</pre>
<pre>\getfrontwopassdata {...¹} {...².} 1 NAME 2 NAME</pre>
<pre>\getglyphdirect {...¹} {...².} 1 FONT 2 NUMMER CHARACTER</pre>
<pre>\getglyphstyled {...¹} {...².} 1 FONT 2 NUMMER CHARACTER</pre>
<pre>\getgparameters [...¹.] [...²,...²,...] 1 TEXT 2 KEY = VALUE</pre>
<pre>\getlasttwopassdata {...} * NAME</pre>
<pre>\getlocalfloat {...} * NUMMER</pre>
<pre>\getlocalfloats</pre>
<pre>\getMPdrawing</pre>
<pre>\getMPlayer [...¹.] [...²,...²,...] {...³.} 1 NAME OPT 2 inherits: \setezainconjurat 3 CONTENT</pre>
<pre>\getmessage {...¹.} {...².} 1 NAME 2 NAME NUMMER</pre>
<pre>\getnamedglyphdirect {...¹.} {...².} 1 FONT 2 NAME</pre>
<pre>\getnamedglyphstyled {...¹.} {...².} 1 FONT 2 NAME</pre>
<pre>\getnamedtwopassdatalist \...¹. {...².} 1 CSNAME 2 NAME</pre>
<pre>\getnaturaldimensions ... * CSNAME NUMMER</pre>

<pre> \getnoflines {...} * DIMENSION </pre>
<pre> \getobject {.¹.} {.².} 1 NAME 2 NAME </pre>
<pre> \getobjectdimensions {.¹.} {.².} 1 NAME 2 NAME </pre>
<pre> \getpaletsize [...] * NAME </pre>
<pre> \getparameters [.¹.] [...,²...,...] 1 TEXT 2 KEY = VALUE </pre>
<pre> \getprivatechar {...} * NAME </pre>
<pre> \getprivateslot {...} * NAME </pre>
<pre> \getrandomcount \.¹. {...} {...} 1 CSNAME 2 NUMMER 3 NUMMER </pre>
<pre> \getrandomdimen \.¹. {...} {...} 1 CSNAME 2 DIMENSION 3 DIMENSION </pre>
<pre> \getrandomfloat \.¹. {...} {...} 1 CSNAME 2 NUMMER 3 NUMMER </pre>
<pre> \getrandomnumber \.¹. {...} {...} 1 CSNAME 2 NUMMER 3 NUMMER </pre>
<pre> \getrandomseed \.* * CSNAME </pre>
<pre> \getrawparameters [.¹.] [...,²...,...] 1 TEXT 2 KEY = VALUE </pre>
<pre> \getrawgparameters [.¹.] [...,²...,...] 1 TEXT 2 KEY = VALUE </pre>
<pre> \getrawnoflines {...} * DIMENSION </pre>
<pre> \getrawparameters [.¹.] [...,²...,...] 1 TEXT 2 KEY = VALUE </pre>

<pre> \getrawxparameters [..¹.] [..,..²..,..] 1 TEXT 2 KEY = VALUE </pre>
<pre> \getreference [..¹.] [..².] 1 implicit text titlu numar pagina realpage 2 REFERENCE </pre>
<pre> \getreferenceentry {..[*].} * implicit text titlu numar pagina realpage </pre>
<pre> \getroundednoflines {..[*].} * DIMENSION </pre>
<pre> \getsubstring {..¹.} {..².} {..³.} 1 NUMBER 2 NUMBER 3 TEXT </pre>
<pre> \gettwopassdata {..[*].} * NAME </pre>
<pre> \gettwopassdatalist {..[*].} * NAME </pre>
<pre> \getuvalue {..[*].} * NAME </pre>
<pre> \getvalue {..[*].} * NAME </pre>
<pre> \getvariable {..¹.} {..².} 1 NAME 2 KEY </pre>
<pre> \getvariabledefault {..¹.} {..².} {..³.} 1 NAME 2 KEY 3 BEFEHL </pre>
<pre> \getxparameters [..¹.] [..,..²..,..] 1 TEXT 2 KEY = VALUE </pre>
<pre> \globaldisablemode [...[*],...] * NAME </pre>
<pre> \globalenablemode [...[*],...] * NAME </pre>
<pre> \globalletempty \..[*]. * CSNAME </pre>
<pre> \globalpopbox ..[*]. * CSNAME NUMBER </pre>
<pre> \globalpopmacro \..[*]. * CSNAME </pre>

<pre> \globalpreventmode [...]*[...] * NAME </pre>
<pre> \globalprocesscommalist [...]\^2.. 1 BEFEHL 2 CSNAME </pre>
<pre> \globalpushbox ... * CSNAME NUMMER </pre>
<pre> \globalpushmacro \^*.. * CSNAME </pre>
<pre> \globalpushreferenceprefix {^*..} ... \globalpopreferenceprefix * + - TEXT </pre>
<pre> \globalswapcounts \^1.. \^2.. 1 CSNAME 2 CSNAME </pre>
<pre> \globalswapdimens \^1.. \^2.. 1 CSNAME 2 CSNAME </pre>
<pre> \globalswapmacros \^1.. \^2.. 1 CSNAME 2 CSNAME </pre>
<pre> \globalundefine {^*..} * NAME </pre>
<pre> \glyphfontfile {^*..} * FONT </pre>
<pre> \gobbledoubleempty [...^1] [...^2] 1 TEXT OPT OPT 2 TEXT </pre>
<pre> \gobbleeightarguments {...^1} {...^2} {...^3} {...^4} {...^5} {...^6} {...^7} {...^8} 1 CONTENT 2 CONTENT 3 CONTENT 4 CONTENT 5 CONTENT 6 CONTENT 7 CONTENT 8 CONTENT </pre>
<pre> \gobblefivearguments {...^1} {...^2} {...^3} {...^4} {...^5} 1 CONTENT 2 CONTENT 3 CONTENT 4 CONTENT 5 CONTENT </pre>
<pre> \gobblefiveoptionals [...^1] [...^2] [...^3] [...^4] [...^5] 1 TEXT 2 TEXT 3 TEXT 4 TEXT 5 TEXT </pre>

`\gobblefourarguments {1..} {2..} {3..} {4..}`

- 1 CONTENT
- 2 CONTENT
- 3 CONTENT
- 4 CONTENT

`\gobblefouroptionals [1..] [2..] [3..] [4..]`

- 1 TEXT
- 2 TEXT
- 3 TEXT
- 4 TEXT

`\gobbleninearguments {1..} {2..} {3..} {4..} {5..} {6..} {7..} {8..} {9..}`

- 1 CONTENT
- 2 CONTENT
- 3 CONTENT
- 4 CONTENT
- 5 CONTENT
- 6 CONTENT
- 7 CONTENT
- 8 CONTENT
- 9 CONTENT

`\gobbleoneargument {*..}`

- * CONTENT

`\gobbleoneoptional [*..]`

- * TEXT

`\gobblesevenarguments {1..} {2..} {3..} {4..} {5..} {6..} {7..}`

- 1 CONTENT
- 2 CONTENT
- 3 CONTENT
- 4 CONTENT
- 5 CONTENT
- 6 CONTENT
- 7 CONTENT

`\gobblesingleempty [*..]`

- * TEXT

OPT

`\gobblesixarguments {1..} {2..} {3..} {4..} {5..} {6..}`

- 1 CONTENT
- 2 CONTENT
- 3 CONTENT
- 4 CONTENT
- 5 CONTENT
- 6 CONTENT

`\gobblespacetokens`

`\gobblenarguments {1..} {2..} {3..} {4..} {5..} {6..} {7..} {8..} {9..} {10..}`

- 1 CONTENT
- 2 CONTENT
- 3 CONTENT
- 4 CONTENT
- 5 CONTENT
- 6 CONTENT
- 7 CONTENT
- 8 CONTENT
- 9 CONTENT
- 10 CONTENT

`\gobblethreearguments {1..} {2..} {3..}`

- 1 CONTENT
- 2 CONTENT
- 3 CONTENT

<pre> \gobblethreeoptionals [...] [...] [...] 1 TEXT 2 TEXT 3 TEXT </pre>
<pre> \gobbletwoarguments {...} {...} 1 CONTENT 2 CONTENT </pre>
<pre> \gobbletwooptionals [...] [...] 1 TEXT 2 TEXT </pre>
<pre> \gobbleuntil *... * CSNAME </pre>
<pre> \gobbleuntilrelax ... \relax * CONTENT </pre>
<pre> \grabbufferdata [...] [...] [...] [...] 1 CATEGORY OPT 2 NAME 3 NAME 4 NAME </pre>
<pre> \grabbufferdatadirect {...} {...} {...} 1 NAME 2 NAME 3 NAME </pre>
<pre> \grabuntil {...} *... 1 NAME 2 CSNAME </pre>
<pre> \grave {...} * CHARACTER </pre>
<pre> \grayvalue {...} * COLOR </pre>
<pre> \greedystring *... \at ... \to *... \and *... 1 TEXT 2 TEXT 3 CSNAME 4 CSNAME </pre>
<pre> \greeknumerals {...} * NUMBER </pre>
<pre> \grid [...] [...] * inherits: \basegrid </pre>
<pre> \grosimelinie </pre>
<pre> \groupedcommand {...} {...} 1 BEFEHL 2 BEFEHL </pre>
<pre> \gsetboxllx ... {...} 1 CSNAME NUMBER 2 DIMENSION </pre>

<pre> \gsetboxlly ¹... {²...} 1 CSNAME NUMBER 2 DIMENSION </pre>
<pre> \gujaratinumerals {[*]...} * NUMBER </pre>
<pre> \gurmurkhinumerals {[*]...} * NUMBER </pre>
<pre> \hairspace </pre>
<pre> \halflinestrut </pre>
<pre> \halfstrut </pre>
<pre> \halfwaybox {[*]...} * CONTENT </pre>
<pre> \handletokens ¹... \with ²... 1 TEXT 2 CSNAME </pre>
<pre> \hash </pre>
<pre> \hat {[*]...} * CHARACTER </pre>
<pre> \hboxofvbox [*]... * CSNAME NUMBER </pre>
<pre> \hboxreference [...¹;...] {²...} 1 REFERENCE 2 CONTENT </pre>
<pre> \hboxBOX {[*]...} * CONTENT </pre>
<pre> \hdofstring {[*]...} * TEXT </pre>
<pre> \headhbox ¹... {²...} 1 TEXT ^{OPT} 2 CONTENT </pre>
<pre> \headnumbercontent </pre>
<pre> \headnumberdistance </pre>
<pre> \headnumberwidth </pre>
<pre> \headreferenceattributes </pre>
<pre> \headsetupspacing </pre>
<pre> \headtextcontent </pre>

<code>\headtextdistance</code>
<code>\headtextwidth</code>
<code>\headvbox</code> ¹ ... { ² ...} 1 TEXT ^{OPT} 2 CONTENT
<code>\headwidth</code>
<code>\heightanddepthofstring</code> { [*] ...} * TEXT
<code>\heightofstring</code> { [*] ...} * TEXT
<code>\heightspanningtext</code> { ¹ ...} { ² ...} { ³ ...} 1 TEXT 2 DIMENSION 3 FONT
<code>\HELP</code> [¹ ...] { ² ...} { ³ ...} 1 REFERENCE 2 TEXT 3 TEXT instances: helptext
<code>\helptext</code> [¹ ...] { ² ...} { ³ ...} 1 REFERENCE ^{OPT} 2 TEXT 3 TEXT
<code>\hglue</code> ... * DIMENSION
<code>\hiddencitation</code> [...] * REFERENCE
<code>\hiddencite</code> [...] * REFERENCE
<code>\highlight</code> [¹ ...] { ² ...} 1 NAME 2 TEXT
<code>\HIGHLIGHT</code> { [*] ...} * TEXT
<code>\highordinalstr</code> { [*] ...} * TEXT
<code>\hilo</code> [¹ ...] { ² ...} { ³ ...} 1 stanga ^{OPT} dreapta 2 CONTENT 3 CONTENT
<code>\himilo</code> { ¹ ...} { ² ...} { ³ ...} 1 CONTENT 2 CONTENT 3 CONTENT

<pre>\hl [...] * NUMBER</pre>
<pre>\horizontalgrowingbar [...,.*=.,...] * inherits: \setuppositionbar</pre>
<pre>\horizontalpositionbar [...,.*=.,...] * inherits: \setuppositionbar</pre>
<pre>\hphantom {...} * CONTENT</pre>
<pre>\hpos {...} {...} 1 NAME 2 CONTENT</pre>
<pre>\hsizefraction {...} {...} 1 DIMENSION 2 NUMBER</pre>
<pre>\hsmash {...} * CONTENT</pre>
<pre>\hsmashbox ... * CSNAME NUMBER</pre>
<pre>\hsmashed {...} * CONTENT</pre>
<pre>\hspace [...¹] [...²] 1 NAME OPT OPT 2 mic mediu mare normal implicit niciunul .5 1 2 3 speech minicitat interquotation citat sentence intersentence NAME</pre>
<pre>\htdpofstring {...} * TEXT</pre>
<pre>\htofstring {...} * TEXT</pre>
<pre>\hyphen</pre>
<pre>\hyphenatedcoloredword {...} * TEXT</pre>
<pre>\hyphenatedfile {...} * FILE</pre>
<pre>\hyphenatedfilename {...} * TEXT</pre>
<pre>\hyphenatedhbox {...} * CONTENT</pre>
<pre>\hyphenatedpar {...} * TEXT</pre>
<pre>\hyphenatedurl {...} * TEXT</pre>

<pre>\hyphenatedword {...} * TEXT</pre>
<pre>\INRSTEX</pre>
<pre>\ibox {...} * CONTENT</pre>
<pre>\ifassignment ¹.. \else ².. \fi 1 TRUE 2 FALSE</pre>
<pre>\iff</pre>
<pre>\ifinobject ¹.. \else ².. \fi 1 TRUE 2 FALSE</pre>
<pre>\ifinoutputstream ¹.. \else ².. \fi 1 TRUE 2 FALSE</pre>
<pre>\ifparameters ¹.. \else ².. \fi 1 TRUE 2 FALSE</pre>
<pre>\iftrialsotypesetting ¹.. \else ².. \fi 1 TRUE 2 FALSE</pre>
<pre>\ignoreimplicitspaces</pre>
<pre>\ignoretagsinexport [...*...] * NAME</pre>
<pre>\ignorevalue {...} * NAME</pre>
<pre>\immediatesavetwopassdata {¹..} {²..} {³..} 1 NAME 2 NUMBER 3 CONTENT</pre>
<pre>\impartefloat [...¹...²...³...] {²..} {³..} 1 inherits: \seteazaimpartefloat 2 BEFEHL 3 CONTENT</pre>
<pre>\impliedby</pre>
<pre>\implies</pre>
<pre>\in {¹..} {²..} [³..] 1 TEXT^{PT} OPT 2 TEXT 3 REFERENCE</pre>
<pre>\inalt {...} * CONTENT</pre>

<pre> \HIGH {...} * CONTENT instances: unitshigh </pre>
<pre> \unitshigh {...} * CONTENT </pre>
<pre> \inclinat </pre>
<pre> \inclinataldin </pre>
<pre> \includemenu [...] * NAME </pre>
<pre> \includeversioninfo {...} * NAME </pre>
<pre> \increment *... * CSNAME </pre>
<pre> \incrementcounter [...] [...] 1 NAME OPT 2 NUMBER </pre>
<pre> \incrementedcounter [...] * NAME </pre>
<pre> \incrementpagenumber </pre>
<pre> \incrementsubpagenumber </pre>
<pre> \incrementvalue {...} * NAME </pre>
<pre> \increment (...,*...) * CSNAME NUMBER </pre>
<pre> \indentation </pre>
<pre> \infofont </pre>
<pre> \infofontbold </pre>
<pre> \inframed [...,...¹...²] {...} 1 inherits: \setea2a²inconjurat 2 CONTENT </pre>
<pre> \inheritparameter [...] [...] [...] 1 TEXT 2 TEXT 3 KEY </pre>
<pre> \inhibitblank </pre>
<pre> \initializeboxstack {...} * NAME </pre>

<pre>\injos [...] * DIMENSION</pre>
<pre>\inlinebuffer [...,*...] * BUFFER OPT</pre>
<pre>\inlinedbox {...} * CONTENT</pre>
<pre>\inlinemath {...} * CONTENT</pre>
<pre>\inlinemathematics {...} * CONTENT</pre>
<pre>\inlinemessage {...} * TEXT</pre>
<pre>\inlineordisplaymath {...} {...} 1 CONTENT 2 CONTENT</pre>
<pre>\inlineprettyprintbuffer {...} {...} 1 BUFFER 2 mp lua xml parsed-xml nested tex context niciunul NAME</pre>
<pre>\inlinerange [...] * REFERENCE</pre>
<pre>\inlinie {...} [...] 1 TEXT OPT 2 REFERENCE</pre>
<pre>\innerflushshapebox</pre>
<pre>\input {...} * FILE</pre>
<pre>\inputfilebarename</pre>
<pre>\inputfilename</pre>
<pre>\inputfilerealsuffix</pre>
<pre>\inputfilesuffix</pre>
<pre>\inputgivenfile {...} * FILE</pre>
<pre>\input ... * FILE</pre>
<pre>\insertpages [...]¹ [...]²,...] [...]³,...,... 1 FILE OPT OPT 2 NUMMER 3 latime = DIMENSION n = NUMMER category = NAME</pre>

<pre> \instalarelimba [..] [..,..²..,..] 1 NAME 2 inherits: \setarelimba </pre>
<pre> \instalarelimba [..] [..] 1 NAME 2 SPRACHE </pre>
<pre> \installactionhandler {...} * NAME </pre>
<pre> \installactivecharacter ... * CHARACTER </pre>
<pre> \installanddefineactivecharacter ¹. {...} 1 CHARACTER 2 BEFEHL </pre>
<pre> \installattributestack *.. * CSNAME </pre>
<pre> \installautocommandhandler \¹.. {...} \³.. 1 CSNAME 2 NAME 3 CSNAME </pre>
<pre> \installautosetuphandler \¹.. {...} 1 CSNAME 2 NAME </pre>
<pre> \installbasicautosetuphandler \¹.. {...} \³.. 1 CSNAME 2 NAME 3 CSNAME </pre>
<pre> \installbasicparameterhandler \¹.. {...} 1 CSNAME 2 NAME </pre>
<pre> \installbottomframerenderer {¹..} {²..} 1 NAME 2 BEFEHL </pre>
<pre> \installcommandhandler \¹.. {...} \³.. 1 CSNAME 2 NAME 3 CSNAME </pre>
<pre> \installcorenamespace {...} * NAME </pre>
<pre> \installdefinehandler \¹.. {...} \³.. 1 CSNAME 2 NAME 3 CSNAME </pre>
<pre> \installdefinitionset \¹.. {...} 1 CSNAME 2 NAME </pre>

```
\installdefinitionsetmember \^1.. {^2..} \^3.. {^4..}
```

```
1 CSNAME  
2 NAME  
3 CSNAME  
4 NAME
```

```
\installdirectcommandhandler \^1.. {^2..}
```

```
1 CSNAME  
2 NAME
```

```
\installdirectparameterhandler \^1.. {^2..}
```

```
1 CSNAME  
2 NAME
```

```
\installdirectparametersethandler \^1.. {^2..}
```

```
1 CSNAME  
2 NAME
```

```
\installdirectsetuphandler \^1.. {^2..}
```

```
1 CSNAME  
2 NAME
```

```
\installdirectstyleandcolorhandler \^1.. {^2..}
```

```
1 CSNAME  
2 NAME
```

```
\installframedautocommandhandler \^1.. {^2..} \^3..
```

```
1 CSNAME  
2 NAME  
3 CSNAME
```

```
\installframedcommandhandler \^1.. {^2..} \^3..
```

```
1 CSNAME  
2 NAME  
3 CSNAME
```

```
\installglobalmacrostack \^*..
```

```
* CSNAME
```

```
\installleftframerenderer {^1..} {^2..}
```

```
1 NAME  
2 BEFEHL
```

```
\installmacrostack \^*..
```

```
* CSNAME
```

```
\installnamespace {^*..}
```

```
* NAME
```

```
\installoutputroutine \^1.. {^2..}
```

```
1 CSNAME  
2 BEFEHL
```

```
\installpagearrangement ^1.. {^2..}
```

```
1 NAME  
2 BEFEHL
```

```
\installparameterhandler \^1.. {^2..}
```

```
1 CSNAME  
2 NAME
```

\installparameterhashhandler \¹... {²...}

- 1 CSNAME
- 2 NAME

\installparametersethandler \¹... {²...}

- 1 CSNAME
- 2 NAME

\installparentinjector \¹... {²...}

- 1 CSNAME
- 2 NAME

\installrightframerenderer {¹...} {²...}

- 1 NAME
- 2 BEFEHL

\installrootparameterhandler \¹... {²...}

- 1 CSNAME
- 2 NAME

\installsetuphandler \¹... {²...}

- 1 CSNAME
- 2 NAME

\installsetuponlycommandhandler \¹... {²...}

- 1 CSNAME
- 2 NAME

\installshipoutmethod {¹...} {²...}

- 1 NAME
- 2 BEFEHL

\installsimplecommandhandler \¹... {²...} \³...

- 1 CSNAME
- 2 NAME
- 3 CSNAME

\installsimpleframedcommandhandler \¹... {²...} \³...

- 1 CSNAME
- 2 NAME
- 3 CSNAME

\installstyleandcolorhandler \¹... {²...}

- 1 CSNAME
- 2 NAME

\installswitchcommandhandler \¹... {²...} \³...

- 1 CSNAME
- 2 NAME
- 3 CSNAME

\installswitchsetuphandler \¹... {²...}

- 1 CSNAME
- 2 NAME

\installtexdirective {¹...} {²...} {³...}

- 1 NAME
- 2 BEFEHL
- 3 BEFEHL

<pre> \installtextracker {...} {...} {...} 1 NAME 2 BEFEHL 3 BEFEHL </pre>
<pre> \installtopframerenderer {...} {...} 1 NAME 2 BEFEHL </pre>
<pre> \installunitsseparator {...} {...} 1 NAME 2 BEFEHL </pre>
<pre> \installunitsspace {...} {...} 1 NAME 2 BEFEHL </pre>
<pre> \installversioninfo {...} {...} 1 NAME 2 BEFEHL </pre>
<pre> \integerrounding {...} * NUMMER </pre>
<pre> \intertext {...} * TEXT </pre>
<pre> \intins [...,...¹...,...] {...} 1 inherits: \setupstretched 2 TEXT </pre>
<pre> \invokepagehandler {...} {...} 1 normal niciunul NAME 2 CONTENT </pre>
<pre> \istltdir ... * TLT TRT </pre>
<pre> \istrtdir ... * TLT TRT </pre>
<pre> \italic </pre>
<pre> \italicaldin </pre>
<pre> \italiccorrection </pre>
<pre> \italicface </pre>
<pre> \itemtag [...,*...] * REFERENCE ^{OPT} </pre>
<pre> \jobfilename </pre>
<pre> \jobfilesuffix </pre>
<pre> \jos {...} * CONTENT </pre>

<pre> \jossus [...] {...} {...} 1 stanga dreapta 2 CONTENT 3 CONTENT </pre>
<pre> \LOW {...} * CONTENT instances: unitslow </pre>
<pre> \unitslow {...} * CONTENT </pre>
<pre> \Kap {...} * TEXT </pre>
<pre> \kap {...} * TEXT </pre>
<pre> \keeplinestgether {...} * NUMBER </pre>
<pre> \keepunwantedspaces </pre>
<pre> \kerncharacters [...] {...} 1 NUMBER OPT 2 TEXT </pre>
<pre> \koreancirclenumerals {...} * NUMBER </pre>
<pre> \koreannumerals {...} * NUMBER </pre>
<pre> \koreannumeralsc {...} * NUMBER </pre>
<pre> \koreannumeralsp {...} * NUMBER </pre>
<pre> \koreanparentnumerals {...} * NUMBER </pre>
<pre> \LAMSTEX </pre>
<pre> \LATEX </pre>
<pre> \LamSTeX </pre>
<pre> \LaTeX </pre>
<pre> \Litera {...} * NUMBER </pre>
<pre> \Litere {...} * NUMBER </pre>
<pre> \LUAJITEX </pre>

<code>\LUATEX</code>
<code>\LUNA {..}</code> * NUMBER
<code>\Lua</code>
<code>\LuajitTeX</code>
<code>\LuaTeX</code>
<code>\la {¹.} {².} [³.]</code> 1 TEXT ^{OPT} OPT 2 TEXT 3 REFERENCE
<code>\LABELlimba</code> instances: head label mathlabel taglabel unit operator prefix suffix btxlabel
<code>\btxlabellimba</code>
<code>\headlimba</code>
<code>\labellimba</code>
<code>\mathlabellimba</code>
<code>\operatorlimba</code>
<code>\prefixlimba</code>
<code>\suffixlimba</code>
<code>\taglabellimba</code>
<code>\unitlimba</code>
<code>\LABELtexts {¹.} {².}</code> 1 KEY 2 TEXT instances: head label mathlabel
<code>\headtexts {¹.} {².}</code> 1 KEY 2 TEXT
<code>\labeltexts {¹.} {².}</code> 1 KEY 2 TEXT
<code>\mathlabeltexts {¹.} {².}</code> 1 KEY 2 TEXT
<code>\languageCharacters {..}</code> * NUMBER

<code>\languagecharacters {...}</code> * NUMMER
<code>\languagecharwidth {...}</code> * SPRACHE
<code>\lapagina [...]</code> * REFERENCE
<code>\lastcounter [...] [...]</code> 1 NAME OPT 2 NUMMER
<code>\lastcountervalue [...]</code> * NAME
<code>\lastdigit {...}</code> * NUMMER
<code>\lastlinewidth</code>
<code>\lastnaturalboxdp</code>
<code>\lastnaturalboxht</code>
<code>\lastnaturalboxwd</code>
<code>\lastpredefinedsymbol</code>
<code>\lastrealpage</code>
<code>\lastrealpagenumber</code>
<code>\lastsubcountervalue [...] [...]</code> 1 NAME 2 NUMMER
<code>\lastsubpagenumber</code>
<code>\lasttwodigits {...}</code> * NUMMER
<code>\lastuserpage</code>
<code>\lastuserpagenumber</code>
<code>\lateluacode {...}</code> * BEFEHL
<code>\layeredtext [..., ...¹..., ...] [..., ...²..., ...] {...} {...}</code> 1 inherits: \setuplayer ^{PT} 2 inherits: \setuplayeredtext 3 TEXT 4 CONTENT
<code>\layerheight</code>

<code>\layerwidth</code>
<code>\lazysavetaggedtwopassdata {¹...} {²...} {³...} {⁴...}</code> 1 NAME 2 NUMMER 3 NAME 4 CONTENT
<code>\lazysavetwopassdata {¹...} {²...} {³...}</code> 1 NAME 2 NUMMER 3 CONTENT
<code>\lbox ¹... {²...}</code> 1 TEXT <small>OPT</small> 2 CONTENT
<code>\leftbottombox {...}</code> * CONTENT
<code>\leftbox {...}</code> * CONTENT
<code>\lefthbox {...}</code> * CONTENT
<code>\leftLABELtext {...}</code> * KEY instances: head label mathlabel
<code>\leftheadtext {...}</code> * KEY
<code>\leftlabeltext {...}</code> * KEY
<code>\leftmathlabeltext {...}</code> * KEY
<code>\leftline {...}</code> * CONTENT
<code>\leftorrightbox ¹... {²...}</code> 1 TEXT <small>OPT</small> 2 CONTENT
<code>\leftorrightvbox ¹... {²...}</code> 1 TEXT <small>OPT</small> 2 CONTENT
<code>\leftorrightvtop ¹... {²...}</code> 1 TEXT <small>OPT</small> 2 CONTENT
<code>\leftskipadaption</code>
<code>\leftsubguillemot</code>

<pre> \lefttopbox {...} * CONTENT </pre>
<pre> \lefttoright </pre>
<pre> \lefttorighthbox ¹... {²...} 1 TEXT <small>OPT</small> 2 CONTENT </pre>
<pre> \lefttorightvbox ¹... {²...} 1 TEXT <small>OPT</small> 2 CONTENT </pre>
<pre> \lefttorightvtop ¹... {²...} 1 TEXT <small>OPT</small> 2 CONTENT </pre>
<pre> \letbeundefined {...} * NAME </pre>
<pre> \letcatcodecommand \¹... ²... \³... 1 CSNAME 2 CHARACTER NUMBER 3 CSNAME </pre>
<pre> \letscsname \¹... \csname ²... \endcsname 1 CSNAME 2 NAME </pre>
<pre> \letcsnamecs \csname ¹... \endcsname \²... 1 NAME 2 CSNAME </pre>
<pre> \letcsnamecsname \csname ¹... \endcsname \csname ²... \endcsname 1 NAME 2 NAME </pre>
<pre> \letdummyparameter {...} \²... 1 KEY 2 CSNAME </pre>
<pre> \letempty *... * CSNAME </pre>
<pre> \letgvalue {...} \²... 1 NAME 2 CSNAME </pre>
<pre> \letgvalueempty {...} * NAME </pre>
<pre> \letgvalurelax {...} * NAME </pre>
<pre> \letterampersand </pre>
<pre> \letterat </pre>
<pre> \letterbackslash </pre>

<code>\letterbar</code>
<code>\letterbgroup</code>
<code>\letterclosebrace</code>
<code>\lettercolon</code>
<code>\letterdollar</code>
<code>\letterdoublequote</code>
<code>\letteregroup</code>
<code>\letterescape</code>
<code>\letterexclamationmark</code>
<code>\letterhash</code>
<code>\letterhat</code>
<code>\letterleftbrace</code>
<code>\letterleftbracket</code>
<code>\letterleftparenthesis</code>
<code>\letterless</code>
<code>\lettermore</code>
<code>\letteropenbrace</code>
<code>\letterpercent</code>
<code>\letterquestionmark</code>
<code>\letterrightbrace</code>
<code>\letterrightbracket</code>
<code>\letterrightparenthesis</code>
<code>\lettersinglequote</code>
<code>\letterslash</code>
<code>\letterspacing</code> [¹ ...] { ² ...}
1 NUMBER OPT
2 TEXT
<code>\lettertilde</code>

<code>\letterunderscore</code>
<code>\letvalue {...} \^{2..}</code> 1 NAME 2 CSNAME
<code>\letvalueempty {...}</code> * NAME
<code>\letvaluerelax {...}</code> * NAME
<code>\lfence {...}</code> * CHARACTER
<code>\lhbox {...}</code> * CONTENT
<code>\limba [...]</code> * SPRACHE
<code>\limbapincipala [...]</code> * SPRACHE
<code>\LANGUAGE</code>
<code>\limitatefirstline {...} {...} {...}</code> 1 TEXT 2 DIMENSION 3 BEFEHL
<code>\limitatelines {...} {...} {...}</code> 1 NUMMER 2 BEFEHL 3 TEXT
<code>\limitatetext {...} {...} {...}</code> 1 TEXT 2 [-+]DIMENSION 3 BEFEHL
<code>\limitatetext {...} {...²,...} {...³}</code> 1 TEXT 2 [-+]DIMENSION 3 BEFEHL
<code>\LINENOTE {...}</code> * TEXT instances: linenote
<code>\linenote {...}</code> * TEXT
<code>\linespanningtext {...} {...} {...}</code> 1 TEXT 2 DIMENSION 3 FONT
<code>\linie {...}</code> * CONTENT


```
\linieneagra [...,.*,...]
* inherits: \seteazalinifinegre
```

```
\liniesubtire
```

```
\linieumplere [...,.*,...]
* inherits: \seteazaliniiumplere
```

```
\liniinegre [...,.*,...]
* inherits: \seteazalinifinegre
```

```
\liniisubtiri [...,.*,...]
* inherits: \seteazalinifsubtire
```

```
\listcitation [...,.*,...] [..]
1 referinta = REFERENCE
  alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
              authoryear
  inainte   = BEFEHL
  dupa      = BEFEHL
  stanga    = BEFEHL
  dreapta   = BEFEHL
  inherits: \setupbtx
2 REFERENCE
```

```
\listcitation [..] [..]
1 implicit categoryOPT entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear
2 REFERENCE
```

```
\listcitation [...,.*,...] [...,.*,...]
1 referinta = REFERENCE
  alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
              authoryear
  inainte   = BEFEHL
  dupa      = BEFEHL
  stanga    = BEFEHL
  dreapta   = BEFEHL
  inherits: \setupbtx
2 KEY = VALUE
```

```
\listcite [...,.*,...] [..]
1 referinta = REFERENCE
  alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
              authoryear
  inainte   = BEFEHL
  dupa      = BEFEHL
  stanga    = BEFEHL
  dreapta   = BEFEHL
  inherits: \setupbtx
2 REFERENCE
```

```
\listcite [..] [..]
1 implicit categoryOPT entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear
2 REFERENCE
```

```
\listcite [...,.*,...] [...,.*,...]
1 referinta = REFERENCE
  alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
              authoryear
  inainte   = BEFEHL
  dupa      = BEFEHL
  stanga    = BEFEHL
  dreapta   = BEFEHL
  inherits: \setupbtx
2 KEY = VALUE
```

```
\listnamespaces
```

<pre>\litera {...} * NUMBER</pre>
<pre>\litere {...} * NUMBER</pre>
<pre>\llap {...} * CONTENT</pre>
<pre>\loadanyfile [...] * FILE</pre>
<pre>\loadanyfileonce [...] * FILE</pre>
<pre>\loadbtxdefinitionfile [...] * FILE</pre>
<pre>\loadbtxreplacementfile [...] * FILE</pre>
<pre>\loadcldfile [...] * FILE</pre>
<pre>\loadcldfileonce [...] * FILE</pre>
<pre>\loadfontgoodies [...] * FILE</pre>
<pre>\loadluafile [...] * FILE</pre>
<pre>\loadluafileonce [...] * FILE</pre>
<pre>\loadspellchecklist [...] [...] 1 NAME 2 FILE</pre>
<pre>\loadtexfile [...] * FILE</pre>
<pre>\loadtexfileonce [...] * FILE</pre>
<pre>\loadtypescriptfile [...] * FILE</pre>
<pre>\localframed [...] [...²...] {...³} 1 NAME 2 inherits: \seteazainconjurat 3 CONTENT</pre>
<pre>\localframedwithsettings [...] [...²...] {...³} 1 NAME 2 inherits: \seteazainconjurat 3 CONTENT</pre>

<code>\localhsize</code>
<code>\localpopbox ...</code> * CSNAME NUMBER
<code>\localpopmacro \...</code> * CSNAME
<code>\localpushbox ...</code> * CSNAME NUMBER
<code>\localpushmacro \...</code> * CSNAME
<code>\localundefine {...}</code> * NAME
<code>\locatedfilepath</code>
<code>\locatefilepath {...}</code> * FILE
<code>\locfilename {...}</code> * FILE
<code>\lomihl {...} {...} {...}</code> 1 CONTENT 2 CONTENT 3 CONTENT
<code>\lowerbox {...} \^2 {...}</code> 1 DIMENSION 2 CSNAME 3 CONTENT
<code>\lowercased {...}</code> * TEXT
<code>\lowercasestring ... \to \^2 ...</code> 1 TEXT 2 CSNAME
<code>\lowerlefthdoubleninequote</code>
<code>\lowerleftsingleninequote</code>
<code>\lowerrighthdoubleninequote</code>
<code>\lowerrightsingleninequote</code>
<code>\LOWHIGH [...] {...} {...}</code> 1 stanga dreapta 2 CONTENT 3 CONTENT

<pre> \LOWMIDHIGH {...} {...} {...} 1 CONTENT 2 CONTENT 3 CONTENT </pre>
<pre> \lrbbox {...} {...} {...} {...} {...} 1 DIMENSION 2 DIMENSION 3 DIMENSION 4 DIMENSION 5 CONTENT </pre>
<pre> \ltop ... {...} 1 TEXT ^{OPT} 2 CONTENT </pre>
<pre> \luacode {...} * BEFEHL </pre>
<pre> \luaconditional *... * CSNAME </pre>
<pre> \luaenvironment ... * FILE </pre>
<pre> \luaexpanded {...} * BEFEHL </pre>
<pre> \luaexpr {...} * CONTENT </pre>
<pre> \luafunction {...} * BEFEHL </pre>
<pre> \luajitTeX </pre>
<pre> \luamajorversion </pre>
<pre> \luaminorversion </pre>
<pre> \luaparameterset {...} {...} 1 NAME 2 CONTENT </pre>
<pre> \luasetup {...} * NAME </pre>
<pre> \luaTeX </pre>
<pre> \luaversion </pre>
<pre> \luna {...} * NUMMER </pre>
<pre> \lungimelista </pre>
<pre> \METAFONT </pre>

<code>\METAFUN</code>
<code>\METAPOST</code>
<code>\MetaFont</code>
<code>\MetaFun</code>
<code>\MetaPost</code>
<code>\MKII</code>
<code>\MKIV</code>
<code>\MKIX</code>
<code>\MKVI</code>
<code>\MKXI</code>
<code>\MONTHLONG {...}</code> * NUMBER
<code>\MONTHSHORT {...}</code> * NUMBER
<code>\MPanchor {...}</code> * NAME
<code>\MPbetex {...}</code> * NAME
<code>\MPc {...}</code> * NAME
<code>\MPcode {...¹} {...²}</code> 1 NAME <small>OPT</small> 2 CONTENT
<code>\MPcolor {...}</code> * COLOR
<code>\MPcoloronly {...}</code> * COLOR
<code>\MPcolumn {...}</code> * NAME
<code>\MPd {...}</code> * NAME
<code>\MPdrawing {...}</code> * CONTENT

<pre> \MPfontsizehskip {...} * FONT </pre>
<pre> \MPgetmultipars {...} {...} 1 NAME 2 NAME </pre>
<pre> \MPgetmultishape {...} {...} 1 NAME 2 NAME </pre>
<pre> \MPgetposboxes {...¹,...} {...²} 1 NAME 2 NAME </pre>
<pre> \MPH {...} * NAME </pre>
<pre> \MPHII </pre>
<pre> \MPHIV </pre>
<pre> \MPinclusions [...¹] {...²} {...³} 1 + OPT OPT 2 NAME 3 CONTENT </pre>
<pre> \MPleftskip {...} * NAME </pre>
<pre> \MPll {...} * NAME </pre>
<pre> \MPlr {...} * NAME </pre>
<pre> \MPls {...} * NAME </pre>
<pre> \MPmenubuttons {...} * NAME </pre>
<pre> \MPn {...} * NAME </pre>
<pre> \MPoptions {...} * COLOR </pre>
<pre> \MPoverlayanchor {...} * NAME </pre>
<pre> \MPp {...} * NAME </pre>
<pre> \MPpage {...} * NAME </pre>

<p>\MPpardata {...}</p> <p>* NAME</p>
<p>\MPplus {...} {...} {...}</p> <p>1 NAME</p> <p>2 NUMBER</p> <p>3 CONTENT</p>
<p>\MPpos {...}</p> <p>* NAME</p>
<p>\MPpositiongraphic {...} {...²...}</p> <p>1 NAME</p> <p>2 KEY = VALUE <small>OPT</small></p>
<p>\MPposset {...}</p> <p>* NAME</p>
<p>\MPpr {...}</p> <p>* NAME</p>
<p>\MPrawvar {...} {...}</p> <p>1 NAME</p> <p>2 KEY</p>
<p>\MPregion {...}</p> <p>* NAME</p>
<p>\MPrest {...} {...}</p> <p>1 NAME</p> <p>2 CONTENT</p>
<p>\MPrightskip {...}</p> <p>* NAME</p>
<p>\MPrs {...}</p> <p>* NAME</p>
<p>\MPstring {...}</p> <p>* NAME</p>
<p>\MPtext {...}</p> <p>* NAME</p>
<p>\MPtransparency {...}</p> <p>* COLOR</p>
<p>\MPul {...}</p> <p>* NAME</p>
<p>\MPur {...}</p> <p>* NAME</p>
<p>\MPVI</p>
<p>\MPv {...} {...} {...}</p> <p>1 NAME</p> <p>2 NUMBER</p> <p>3 CONTENT</p>

<pre>\MPvar {...} * KEY</pre>
<pre>\MPvariable {...} * KEY</pre>
<pre>\MPvv {...} {...} 1 NAME 2 CONTENT</pre>
<pre>\MPw {...} * NAME</pre>
<pre>\MPwhd {...} * NAME</pre>
<pre>\MPx {...} * NAME</pre>
<pre>\MPxy {...} * NAME</pre>
<pre>\MPxywhd {...} * NAME</pre>
<pre>\MPy {...} * NAME</pre>
<pre>\m [...] {...} 1 NAME 2 CONTENT</pre>
<pre>\makecharacteractive ... * CHARACTER</pre>
<pre>\makerawcommalist [...¹,...] \²... 1 BEFEHL 2 CSNAME</pre>
<pre>\makestrutofbox ... * CSNAME NUMBER</pre>
<pre>\mapfontsize [...] [...] 1 DIMENSION 2 DIMENSION</pre>
<pre>\marcaje (...¹,...) (...²,...) [...³] 1 POSITION 2 POSITION 3 REFERENCE</pre>
<pre>\mare ... * CHARACTER</pre>
<pre>\margindata [...] [...²..._{OPT},...] [...³..._{OPT},...] {...⁴} 1 NAME 2 referinta = REFERENCE inherits: \setupmargindata 3 inherits: \setupmarginframed 4 CONTENT</pre>

`\MARGINDATA [.,.,.1.,.,.] [.,.,.2.,.,.] {.3.}`

1 referinta = REFERENCE^{OPT}
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

instances: inleftmargin inrightmargin inoutermargin ininnermargin inleftedge inrightedge
inouteredge ininneredge atleftmargin atrightmargin inleft inright inouter ininner inmargin
inother margintext

`\atleftmargin [.,.,.1.,.,.] [.,.,.2.,.,.] {.3.}`

1 referinta = REFERENCE^T
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

`\atrightmargin [.,.,.1.,.,.] [.,.,.2.,.,.] {.3.}`

1 referinta = REFERENCE^{OPT}
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

`\ininner [.,.,.1.,.,.] [.,.,.2.,.,.] {.3.}`

1 referinta = REFERENCE^{OPT}
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

`\ininneredge [.,.,.1.,.,.] [.,.,.2.,.,.] {.3.}`

1 referinta = REFERENCE^{OPT}
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

`\ininnermargin [.,.,.1.,.,.] [.,.,.2.,.,.] {.3.}`

1 referinta = REFERENCE^{OPT}
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

`\inleft [.,.,.1.,.,.] [.,.,.2.,.,.] {.3.}`

1 referinta = REFERENCE^{OPT}
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

`\inleftedge [.,.,.1.,.,.] [.,.,.2.,.,.] {.3.}`

1 referinta = REFERENCE^{OPT}
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

`\inleftmargin [.,.,.1.,.,.] [.,.,.2.,.,.] {.3.}`

1 referinta = REFERENCE^T
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

`\inmargin [.,.,.1.,.,.] [.,.,.2.,.,.] {.3.}`

1 referinta = REFERENCE^{OPT}
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

```
\inother [...1...] [...2...] {...3}  
1 referinta = REFERENCEOPT  
  inherits: \setupmargindata  
2 inherits: \setupmarginframed  
3 CONTENT
```

```
\inouter [...1...] [...2...] {...3}  
1 referinta = REFERENCEOPT  
  inherits: \setupmargindata  
2 inherits: \setupmarginframed  
3 CONTENT
```

```
\inouteredge [...1...] [...2...] {...3}  
1 referinta = REFERENCEOPT  
  inherits: \setupmargindata  
2 inherits: \setupmarginframed  
3 CONTENT
```

```
\inoutermargin [...1...] [...2...] {...3}  
1 referinta = REFERENCEOPT  
  inherits: \setupmargindata  
2 inherits: \setupmarginframed  
3 CONTENT
```

```
\inright [...1...] [...2...] {...3}  
1 referinta = REFERENCEOPT  
  inherits: \setupmargindata  
2 inherits: \setupmarginframed  
3 CONTENT
```

```
\inrightedge [...1...] [...2...] {...3}  
1 referinta = REFERENCEOPT  
  inherits: \setupmargindata  
2 inherits: \setupmarginframed  
3 CONTENT
```

```
\inrightmargin [...1...] [...2...] {...3}  
1 referinta = REFERENCEOPT  
  inherits: \setupmargindata  
2 inherits: \setupmarginframed  
3 CONTENT
```

```
\margintext [...1...] [...2...] {...3}  
1 referinta = REFERENCEOPT  
  inherits: \setupmargindata  
2 inherits: \setupmarginframed  
3 CONTENT
```

```
\markcontent [...1] {...2}  
1 reset tot NAMEOPT  
2 CONTENT
```

```
\markedpages [...]  
* NAME
```

```
\markinjector [...]  
* NAME
```

```
\markpage [...1] [...2...]  
1 NAMEOPT  
2 [-+]NUMBER
```

```
\mat {...}  
* CONTENT
```

$\backslash\matematica$ [¹ ...] { ² ...} 1 NAME OPT 2 CONTENT
$\backslash\math$ [¹ ...] { ² ...} 1 NAME OPT 2 CONTENT
$\backslash\mathbf$
$\backslash\mathbfi$
$\backslash\mathbb$
$\backslash\mathbfb$
$\backslash\mathCOMMAND$ { ¹ ...} { ² ...} 1 TEXT OPT OPT 2 TEXT
$\backslash\mathdefault$
$\backslash\mathdouble$ [¹ ...] { ² ...} { ³ ...} { ⁴ ...} 1 ambele vfenced ^{PT} 2 NUMMER 3 TEXT 4 TEXT
$\backslash\mathDOUBLEEXTENSIBLE$ { ¹ ...} { ² ...} 1 TEXT 2 TEXT instances: doublebar doublebrace doubleparent doublebracket overbarunderbar overbraceunderbrace overparentunderparent overbracketunderbracket
$\backslash\doublebar$ { ¹ ...} { ² ...} 1 TEXT 2 TEXT
$\backslash\doublebrace$ { ¹ ...} { ² ...} 1 TEXT 2 TEXT
$\backslash\doublebracket$ { ¹ ...} { ² ...} 1 TEXT 2 TEXT
$\backslash\doubleparent$ { ¹ ...} { ² ...} 1 TEXT 2 TEXT
$\backslash\overbarunderbar$ { ¹ ...} { ² ...} 1 TEXT 2 TEXT
$\backslash\overbraceunderbrace$ { ¹ ...} { ² ...} 1 TEXT 2 TEXT

`\overbracketunderbracket {1.} {2.}`

- 1 TEXT
- 2 TEXT

`\overparentunderparent {1.} {2.}`

- 1 TEXT
- 2 TEXT

`\MATHEXTENSIBLE {1.} {2.}`

- 1 TEXT OPT OPT
- 2 TEXT

instances: xrel xequal xleftarrow xrightarrow xleftrightharrow xLeftarrow xRightarrow
xLeftrightharrow xtwoheadleftarrow xtwoheadrightarrow xmapsto xhookleftarrow xhookrightarrow
xleftharpoondown xleftharpoonup xrightarpoondown xrightarpoonup xrightoverleftarrow
xleftrightharpoons xrightleftharpoons xtriplerel mrel mequal mleftarrow mrightarrow mleftrightharrow
mLeftarrow mRightarrow mLeftrightharrow mtwoheadleftarrow mtwoheadrightarrow mmapsto mhookleftarrow
mhookrightarrow mleftharpoondown mleftharpoonup mrightarpoondown mrightarpoonup mrightoverleftarrow
mleftrightharpoons mrightleftharpoons mtriplerel eleftarrowfill erightarrowfill eleftrightharrowfill
etwoheadrightarrowfill eleftharpoondownfill eleftharpoonupfill erightharpoondownfill
erightharpoonupfill eoverbarfill eunderbarfill eoverbracefill eunderbracefill eoverparentfill
eunderparentfill eoverbracketfill eunderbracketfill trel tequal tmapsto tleftarrow trightarrow
tleftrightharrow tLeftarrow tRightarrow tLeftrightharrow ttwoheadleftarrow ttwoheadrightarrow
thookleftarrow thookrightarrow tleftharpoondown tleftharpoonup trightharpoondown trightharpoonup
trightoverleftarrow tleftrightharpoons trightleftharpoons ttriplerel cleftarrow crightarrow
crightoverleftarrow

`\cleftarrow {1.} {2.}`

- 1 TEXT OPT OPT
- 2 TEXT

`\crightarrow {1.} {2.}`

- 1 TEXT OPT OPT
- 2 TEXT

`\crightoverleftarrow {1.} {2.}`

- 1 TEXT OPT OPT
- 2 TEXT

`\eleftarrowfill {1.} {2.}`

- 1 TEXT OPT OPT
- 2 TEXT

`\eleftharpoondownfill {1.} {2.}`

- 1 TEXT OPT OPT
- 2 TEXT

`\eleftharpoonupfill {1.} {2.}`

- 1 TEXT OPT OPT
- 2 TEXT

`\eleftrightharrowfill {1.} {2.}`

- 1 TEXT OPT OPT
- 2 TEXT

`\eoverbarfill {1.} {2.}`

- 1 TEXT OPT OPT
- 2 TEXT

`\eoverbracefill {1.} {2.}`

- 1 TEXT OPT OPT
- 2 TEXT

`\eoverbracketfill {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\eoverparentfill {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\erightarrowfill {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\erightharpoondownfill {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\erightharpoonupfill {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\etwoheadrightarrowfill {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\eunderbarfill {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\eunderbracefill {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\eunderbracketfill {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\eunderparentfill {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\mequal {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\mhookleftarrow {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\mhookrightarrow {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\mLeftarrow {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\mLeftrightarrow {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\mleftarrow {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\mleftharpoondown {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\mleftharpoonup {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\mleftrightharpoonup {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\mleftrightharpoons {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\mmapsto {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\mrightarrow {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\mrel {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\mrightarrow {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\mrightharpoondown {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\mrightharpoonup {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\mrightharpoons {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\mrightarrowoverleftarrow {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\mtriplerel {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\mtwoheadleftarrow {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\mtwoheadrightarrow {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\tequal {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\thookleftarrow {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\thookrightarrow {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\tLeftarrow {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\tLeftrightarrow {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\tleftarrow {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\tleftharpoondown {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\tleftharpoonup {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\tleftrightarrow {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\tleftrightarpoons {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\tmapsto {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\tRrightarrow {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\trel {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\trightarrow {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\trightharpoondown {...} {...}`

1 TEXT OPT OPT

2 TEXT

`\trightharpoonup {...} {...}`

1 TEXT OPT OPT

2 TEXT

`\trightleftharpoons {...} {...}`

1 TEXT OPT OPT

2 TEXT

`\trightoverleftarrow {...} {...}`

1 TEXT OPT OPT

2 TEXT

`\ttriplelrel {...} {...}`

1 TEXT OPT OPT

2 TEXT

`\twoheadleftarrow {...} {...}`

1 TEXT OPT OPT

2 TEXT

`\twoheadrightarrow {...} {...}`

1 TEXT OPT OPT

2 TEXT

`\xequal {...} {...}`

1 TEXT OPT OPT

2 TEXT

`\xhookleftarrow {...} {...}`

1 TEXT OPT OPT

2 TEXT

`\xhookrightarrow {...} {...}`

1 TEXT OPT OPT

2 TEXT

`\xLeftarrow {...} {...}`

1 TEXT OPT OPT

2 TEXT

`\xLeftrightarrow {...} {...}`

1 TEXT OPT OPT

2 TEXT

`\xleftarrow {...} {...}`

1 TEXT OPT OPT

2 TEXT

`\xleftharpoondown {...} {...}`

1 TEXT OPT OPT

2 TEXT

`\xleftharpoonup {...} {...}`

1 TEXT OPT OPT

2 TEXT

`\xleftrightharpoonarrow {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\xleftrightharpoons {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\xmapsto {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\xrightarrow {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\xrel {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\xrightarrow {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\xrightarrow[down] {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\xrightarrow[up] {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\xrightarrowleft {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\xrightarrowleftover {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\xtriplerel {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\twoheadleftarrow {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\twoheadrightarrow {...} {...}`

1 TEXT OPT OPT
2 TEXT

`\mathfraktur`

`\MATHFRAMED [...1...] {...}`

1 inherits: `\setupmathframed`
2 CONTENT

instances: `mframed inmframed mcframed`

<pre> \inmframed [...¹...] {...} 1 inherits: \setupmathframed 2 CONTENT </pre>
<pre> \mcfamed [...¹...] {...} 1 inherits: \setupmathframed 2 CONTENT </pre>
<pre> \mframed [...¹...] {...} 1 inherits: \setupmathframed 2 CONTENT </pre>
<pre> \mathfunction {...} * CONTENT </pre>
<pre> \mathit </pre>
<pre> \mathitalic </pre>
<pre> \MATHMATRIX {...} * CONTENT </pre>
<pre> \mathop {...} * CONTENT </pre>
<pre> \MATHORNAMENT {...} * CONTENT </pre>
<pre> \mathover [...¹...] {...²...} {...³...} 1 sus vfenced^{OPT} 2 NUMBER 3 TEXT </pre>
<pre> \MATHOVEREXTENSIBLE {...} * TEXT </pre>
<pre> \MATHOVERTEXTENSIBLE [...¹...] {...²...} 1 TEXT 2 TEXT instances: </pre>
<pre> \MATHRADICAL [...¹...] {...²...} 1 TEXT ^{OPT} 2 CONTENT </pre>
<pre> \mathrm </pre>
<pre> \mathscript </pre>
<pre> \mathsl </pre>
<pre> \mathss </pre>
<pre> \mathtext ...¹ {...²...} 1 TEXT ^{OPT} 2 TEXT </pre>

```
\mathtextbf ... {...}
1 TEXT OPT
2 TEXT
```

```
\mathtextbi ... {...}
1 TEXT OPT
2 TEXT
```

```
\mathtextbs ... {...}
1 TEXT OPT
2 TEXT
```

```
\mathtextit ... {...}
1 TEXT OPT
2 TEXT
```

```
\mathtextsl ... {...}
1 TEXT OPT
2 TEXT
```

```
\mathtexttf ... {...}
1 TEXT OPT
2 TEXT
```

```
\maththf
```

```
\mathtriplet [...] {...} {...} {...}
1 NAME OPT OPT OPT OPT
2 TEXT
3 TEXT
4 TEXT
```

```
\MATHTRIPLET [...] {...} {...} {...}
1 NAME OPT OPT OPT OPT
2 TEXT
3 TEXT
4 TEXT
```

```
\mathhtt
```

```
\mathunder [...] {...} {...}
1 subsol vfenceff
2 NUMBER
3 TEXT
```

```
\MATHUNDEREXTENSIBLE {...}
* TEXT
```

```
\MATHUNDERTEXTEXTENSIBLE {...} {...}
1 TEXT
2 TEXT
instances:
```

```
\MATHUNSTACKED
```

```
\mathupright
```

```
\mathword ... {...}
1 TEXT OPT
2 TEXT
```

$\backslash\mathwordbf$ \dots $\{.\dots\}$ 1 TEXT <small>OPT</small> 2 TEXT
$\backslash\mathwordbi$ \dots $\{.\dots\}$ 1 TEXT <small>OPT</small> 2 TEXT
$\backslash\mathwordbs$ \dots $\{.\dots\}$ 1 TEXT <small>OPT</small> 2 TEXT
$\backslash\mathwordit$ \dots $\{.\dots\}$ 1 TEXT <small>OPT</small> 2 TEXT
$\backslash\mathwordsl$ \dots $\{.\dots\}$ 1 TEXT <small>OPT</small> 2 TEXT
$\backslash\mathwordtf$ \dots $\{.\dots\}$ 1 TEXT <small>OPT</small> 2 TEXT
$\backslash\maxaligned$ $\{.\dots\}$ * CONTENT
\backslashmbox $\{.\dots\}$ * CONTENT
\backslashmeasure $\{.\dots\}$ * NAME
\backslashmeasured $\{.\dots\}$ * NAME
\backslashmediu $[\dots]$ * FILE
\backslashmediu \dots * FILE
\backslashmedskip
\backslashmedspace
$\backslashmenuinteractiune$ $[\dots]$ $[\dots,\dots,\dots]$ 1 NAME <small>OPT</small> 2 inherits: $\backslashseteazamenuinteractiune$
\backslashmessage $\{.\dots\}$ * TEXT
\backslashmetaTeX
\backslashmfence $\{.\dots\}$ * CHARACTER

<pre>\mfunction {...} * CONTENT</pre>
<pre>\mfunctionlabeltext {...} * NAME</pre>
<pre>\mhbox {...} * CONTENT</pre>
<pre>\mic</pre>
<pre>\micaldin</pre>
<pre>\micaldininclinat</pre>
<pre>\micinclinat</pre>
<pre>\micinclinataldin</pre>
<pre>\micitalicaldin</pre>
<pre>\micnormal</pre>
<pre>\mictype</pre>
<pre>\middlealigned {...} * CONTENT</pre>
<pre>\middlebox {...} * CONTENT</pre>
<pre>\midhbox {...} * CONTENT</pre>
<pre>\midsubsentence</pre>
<pre>\minimalhbox ¹... ²{...} 1 TEXT OPT 2 CONTENT</pre>
<pre>\mixedcaps {...} * TEXT</pre>
<pre>\mkvibuffer [...] * BUFFER OPT</pre>
<pre>\moduleparameter ¹{...} ²{...} 1 FILE 2 KEY</pre>
<pre>\molecule {...} * CONTENT</pre>
<pre>\mono</pre>
<pre>\monoaldin</pre>

<code>\mononormal</code>
<code>\monthlong {...}</code> * NUMMER
<code>\monthshort {...}</code> * NUMMER
<code>\mprandomnumber</code>
<code>\mtext {...}</code> * CONTENT
<code>\NormalizeFontHeight \¹... {²...} {³...} {⁴...}</code> 1 CSNAME 2 TEXT 3 DIMENSION 4 FONT
<code>\NormalizeFontWidth \¹... {²...} {³...} {⁴...}</code> 1 CSNAME 2 TEXT 3 DIMENSION 4 FONT
<code>\NormalizeTextHeight {¹...} {²...} {³...}</code> 1 FONT 2 DIMENSION 3 TEXT
<code>\NormalizeTextWidth {¹...} {²...} {³...}</code> 1 FONT 2 DIMENSION 3 TEXT
<code>\Numere {...}</code> * NUMMER
<code>\Numereromane {...}</code> * NUMMER
<code>\namedheadnumber {...}</code> * ABSCHNITT
<code>\namedstructureheadlocation {...}</code> * ABSCHNITT
<code>\namedstructureuservariable {¹...} {²...}</code> 1 ABSCHNITT 2 KEY
<code>\namedstructurevariable {¹...} {²...}</code> 1 ABSCHNITT 2 KEY
<code>\namedtaggedlabeltexts {¹...} {²...} {³...} {⁴...} {⁵...}</code> 1 NAME 2 NAME 3 NAME 4 NAME 5 CONTENT

<pre> \naturalhbox ... {...} 1 TEXT OPT 2 CONTENT </pre>
<pre> \naturalhpack ... {...} 1 TEXT OPT 2 CONTENT </pre>
<pre> \naturalvbox ... {...} 1 TEXT OPT 2 CONTENT </pre>
<pre> \naturalvcenter ... {...} 1 TEXT OPT 2 CONTENT </pre>
<pre> \naturalvpack ... {...} 1 TEXT OPT 2 CONTENT </pre>
<pre> \naturalvtop ... {...} 1 TEXT OPT 2 CONTENT </pre>
<pre> \naturalwd ... * CSNAME NUMBER </pre>
<pre> \necunoscut </pre>
<pre> \negatecolorbox ... * CSNAME NUMBER </pre>
<pre> \negated {...} * TEXT </pre>
<pre> \negemspace </pre>
<pre> \negenspace </pre>
<pre> \negthinspace </pre>
<pre> \newattribute \... * CSNAME </pre>
<pre> \newcatcodetable \... * CSNAME </pre>
<pre> \newcounter \... * CSNAME </pre>
<pre> \newevery \¹... \²... 1 CSNAME 2 CSNAME </pre>
<pre> \newfrenchspacing </pre>
<pre> \newmode {...} * NAME </pre>

<pre>\newsignal *... * CSNAME</pre>
<pre>\newsystemmode {...} * NAME</pre>
<pre>\nextbox</pre>
<pre>\nextboxdp</pre>
<pre>\nextboxht</pre>
<pre>\nextboxhtdp</pre>
<pre>\nextboxwd</pre>
<pre>\nextcounter [...] [...] 1 NAME OPT 2 NUMBER</pre>
<pre>\nextcountervalue [...] * NAME</pre>
<pre>\nextdepth</pre>
<pre>\nextparagraphs</pre>
<pre>\urmatoru1PARAGRAPHS</pre>
<pre>\nextrealpage</pre>
<pre>\nextrealpagenumber</pre>
<pre>\nextsubcountervalue [...] [...] 1 NAME 2 NUMBER</pre>
<pre>\nextsubpagenumber</pre>
<pre>\nextuserpage</pre>
<pre>\nextuserpagenumber</pre>
<pre>\nocharacteralign</pre>
<pre>\nocitation [...] * REFERENCE</pre>
<pre>\nocitation {...} * REFERENCE</pre>
<pre>\nocite [...] * REFERENCE</pre>

<pre>\nocite {...} * REFERENCE</pre>
<pre>\nodetostring \¹... {²...} 1 CSNAME 2 CONTENT</pre>
<pre>\nofigurepages</pre>
<pre>\noflines</pre>
<pre>\noflocalfloats</pre>
<pre>\noheightstrut</pre>
<pre>\noindentation</pre>
<pre>\noitem</pre>
<pre>\nokap {...} * TEXT</pre>
<pre>\nonfrenchspacing</pre>
<pre>\nonmathematics {...} * CONTENT</pre>
<pre>\normal</pre>
<pre>\normalboldface</pre>
<pre>\normalframedwithsettings [...,¹...,...] {²...} 1 inherits: \seteazainconjurat 2 CONTENT</pre>
<pre>\normalitalicface</pre>
<pre>\normalizebodyfontsize \¹... {²...} 1 CSNAME 2 DIMENSION</pre>
<pre>\normalizedfontsize</pre>
<pre>\normalizefontdepth \¹... {²...} {³...} {⁴...} 1 CSNAME 2 TEXT 3 DIMENSION 4 FONT</pre>
<pre>\normalizefontheight \¹... {²...} {³...} {⁴...} 1 CSNAME 2 TEXT 3 DIMENSION 4 FONT</pre>

`\normalizefontline \1. {2.} {3.} {4.}`

1 CSNAME
2 TEXT
3 DIMENSION
4 FONT

`\normalizefontwidth \1. {2.} {3.} {4.}`

1 CSNAME
2 TEXT
3 DIMENSION
4 FONT

`\normalizetextdepth {1.} {2.} {3.}`

1 FONT
2 DIMENSION
3 TEXT

`\normalizetextheight {1.} {2.} {3.}`

1 FONT
2 DIMENSION
3 TEXT

`\normalizetextline {1.} {2.} {3.}`

1 FONT
2 DIMENSION
3 TEXT

`\normalizetextwidth {1.} {2.} {3.}`

1 FONT
2 DIMENSION
3 TEXT

`\normalslantedface`

`\normaltypeface`

`\nota [1.] [2.]`

1 NAME ^{OPT}
2 REFERENCE

`\NOTE [...1,...] {2.}`

1 REFERENCE^{PT}
2 TEXT

instances: footnote endnote

`\NOTE [...*...]`

* titlu = TEXT
semncarte = TEXT
lista = TEXT
referinta = REFERENCE

instances: footnote endnote

`\endnote [...*...]`

* titlu = TEXT
semncarte = TEXT
lista = TEXT
referinta = REFERENCE

`\footnote [...*...]`

* titlu = TEXT
semncarte = TEXT
lista = TEXT
referinta = REFERENCE

<pre>\endnote [...¹,...] {...} 1 REFERENCE OPT 2 TEXT</pre>
<pre>\footnote [...¹,...] {...} 1 REFERENCE OPT 2 TEXT</pre>
<pre>\notesymbol [...¹] [...²] 1 NAME OPT 2 REFERENCE</pre>
<pre>\notragged</pre>
<pre>\ntimes {...¹} {...²} 1 TEXT 2 NUMMER</pre>
<pre>\numarformula [...[*],...] * REFERENCE OPT</pre>
<pre>\numarpagina</pre>
<pre>\numartitlu [...¹] [...²] 1 ABSCHNITT OPT 2 precedent curent urmatorul primul ultim</pre>
<pre>\numartitlucurent</pre>
<pre>\numberofpoints {...} * DIMENSION</pre>
<pre>\numere {...} * NUMMER</pre>
<pre>\numereromane {...} * NUMMER</pre>
<pre>\obeydepth</pre>
<pre>\objectdepth</pre>
<pre>\objectheight</pre>
<pre>\objectmargin</pre>
<pre>\objectwidth</pre>
<pre>\obox {...} * CONTENT</pre>
<pre>\offset [...¹,...²,...] {...} 1 inherits: \setupoffset OPT 2 CONTENT</pre>

`\offsetbox [...1...2...3]`

1 inherits: \setupoffsetbox
2 CSNAME
3 CONTENT

`\olinie [...]`

* REFERENCE

`\onedigitrounding {...}`

* NUMMER

`\ordinaldaynumber {...}`

* NUMMER

`\ordinalstr {...}`

* TEXT

`\ornamenttext [...1...2...3...4]`

1 alternativ = a b OPT
inherits: \setupcollector
2 stil = STYLE BEFEHL
culoare = COLOR
inherits: \seteazainconjurat
3 TEXT
4 CONTENT

`\ornamenttext [...1...2...3]`

1 NAME
2 TEXT
3 CONTENT

`\ornamenttext [...1...2...3...4]`

1 alternativ = a b OPT
inherits: \setuplayer
2 inherits: \setuplayeredtext
3 TEXT
4 CONTENT

`\ORNAMENT {...1...2...}`

1 TEXT
2 CONTENT

`\outputfilename`

`\outputstreambox [...]`

* NAME

`\outputstreamcopy [...]`

* NAME

`\outputstreamunvbox [...]`

* NAME

`\outputstreamunvcopy [...]`

* NAME

`\over [...]`

* REFERENCE

`\overlaybutton [...]`

* REFERENCE

<pre>\overlaybutton {...} * REFERENCE</pre>
<pre>\overlaycolor</pre>
<pre>\overlaydepth</pre>
<pre>\overlayfigure {...} * FILE</pre>
<pre>\overlayheight</pre>
<pre>\overlayimage {...} * FILE</pre>
<pre>\overlaylinecolor</pre>
<pre>\overlaylinewidth</pre>
<pre>\overlayoffset</pre>
<pre>\overlayrollbutton [^.^.] [^.^.] 1 REFERENCE 2 REFERENCE</pre>
<pre>\overlaywidth</pre>
<pre>\overloaderror</pre>
<pre>\overset {.^.^} {.^.^} 1 TEXT 2 TEXT</pre>
<pre>\PDFcolor {...} * NAME</pre>
<pre>\PDFETEX</pre>
<pre>\PDFTEX</pre>
<pre>\PICTEX</pre>
<pre>\PiCTeX</pre>
<pre>\PointsToBigPoints {.^.^} \.^.^ 1 DIMENSION 2 CSNAME</pre>
<pre>\PointsToReal {.^.^} \.^.^ 1 DIMENSION 2 CSNAME</pre>
<pre>\PointsToWholeBigPoints {.^.^} \.^.^ 1 DIMENSION 2 CSNAME</pre>

<code>\PPCHTEX</code>
<code>\PPCHTeX</code>
<code>\PRAGMA</code>
<code>\PtToCm {...}</code> * DIMENSION
<code>\pagearea [..] [..] [..]</code> 1 sus antet text subso ^{OPT} I subso ^{OPT} T 2 text margine bordura 3 stanga dreapta lefttext middletext righttext
<code>\pagebreak [...,*...]</code> * gol antet subso ^{OPT} dummy incadrat NUMMER +NUMMER implicit reset dezactivat da nu marcaj blank preferinta preferintamare stanga dreapta par impar cvadrupul ultim ultimpagina start stop NAME
<code>\pagefigure [..] [..,..²..,..²..]</code> 1 FILE ^{OPT} 2 offset = implicit overlay niciunul DIMENSION
<code>\pageinjection [..] [..,..²..,..²..]</code> 1 NAME ^{OPT} ^{OPT} 2 KEY = VALUE
<code>\pageinjection [..,..¹..,..¹..] [..,..²..,..²..]</code> 1 inherits: \setuppageinj ^{OPT} ection ^{OPT} 2 KEY = VALUE
<code>\pagestaterealpage {..} {..}</code> 1 NAME 2 NAME NUMMER
<code>\pagina [...,*...]</code> * inherits: \ ^{OPT} pagebreak
<code>\paletsize</code>
<code>\PARAGRAPHS</code>
<code>\pastreazablocuri [..,¹..] [..,²..]</code> 1 NAME ^{OPT} 2 NAME
<code>\pdfactualtext {..} {..}</code> 1 CONTENT 2 TEXT
<code>\pdfbackendactualtext {..} {..}</code> 1 CONTENT 2 TEXT
<code>\pdfbackendcurrentresources</code>
<code>\pdfbackendsetcatalog {..} {..}</code> 1 NAME 2 TEXT

<p><code>\pdfbackendsetcolorspace {¹.}</code> <code>{².}</code></p> <p>1 NAME 2 TEXT</p>
<p><code>\pdfbackendsettextgstate {¹.}</code> <code>{².}</code></p> <p>1 NAME 2 TEXT</p>
<p><code>\pdfbackendsetinfo {¹.}</code> <code>{².}</code></p> <p>1 NAME 2 TEXT</p>
<p><code>\pdfbackendsetname {¹.}</code> <code>{².}</code></p> <p>1 NAME 2 TEXT</p>
<p><code>\pdfbackendsetpageattribute {¹.}</code> <code>{².}</code></p> <p>1 NAME 2 TEXT</p>
<p><code>\pdfbackendsetpageresource {¹.}</code> <code>{².}</code></p> <p>1 NAME 2 TEXT</p>
<p><code>\pdfbackendsetpagesattribute {¹.}</code> <code>{².}</code></p> <p>1 NAME 2 TEXT</p>
<p><code>\pdfbackendsetpattern {¹.}</code> <code>{².}</code></p> <p>1 NAME 2 TEXT</p>
<p><code>\pdfbackendsetshade {¹.}</code> <code>{².}</code></p> <p>1 NAME 2 TEXT</p>
<p><code>\pdfcolor {[*].}</code></p> <p>* NAME</p>
<p><code>\pdfeTeX</code></p>
<p><code>\pdfTeX</code></p>
<p><code>\pelung {[*].}</code></p> <p>* NAME</p>
<p><code>\percent</code></p>
<p><code>\percentdimen {¹.}</code> <code>{².}</code></p> <p>1 DIMENSION CSNAME 2 DIMENSION NUMBER</p>
<p><code>\permitcaretescape</code></p>
<p><code>\permitcircumflexescape</code></p>
<p><code>\permitspacesbetweengroups</code></p>

<p><code>\persiandecimals {...}</code> * NUMBER</p>
<p><code>\persiannumerals {...}</code> * NUMBER</p>
<p><code>\phantom {...}</code> * CONTENT</p>
<p><code>\phantombox [...,.*=,....]</code> * latime = DIMENSION inaltime = DIMENSION inaltime = DIMENSION</p>
<p><code>\pickupgroupedcommand {.^1.} {.^2.} {.^3.}</code> 1 BEFEHL 2 BEFEHL 3 BEFEHL</p>
<p><code>\placeattachments</code></p>
<p><code>\placebtxrendering [.^1.] [...,.*^2.,....]</code> 1 NAME OPT OPT 2 inherits: \setupbtxrendering</p>
<p><code>\placecitation [...]</code> * REFERENCE</p>
<p><code>\placecomments</code></p>
<p><code>\placecurrentformulanumber</code></p>
<p><code>\placedbox {...}</code> * CONTENT</p>
<p><code>\placefloat [.^1.] [...,.*^2.,....] [...,.*^3.,....] {.^4.} {.^5.}</code> 1 SINGULAR OPT OPT 2 split totdeauna stanga dreapta intern extern spatuspate cutspace instanga indreapta inmarginie marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta undeva effective antet subsol 3 REFERENCE 4 TEXT 5 CONTENT</p>
<p><code>\placefloatwithsetups [.^1.] [...,.*^2.,....] [...,.*^3.,....] {.^4.} {.^5.}</code> 1 NAME OPT OPT 2 split totdeauna stanga dreapta intern extern spatuspate cutspace instanga indreapta inmarginie marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta undeva effective antet subsol 3 REFERENCE 4 TEXT 5 CONTENT</p>

`\puneFLOAT [...1,...] [...2,...] {...3} {...4}`

- 1 split totdeauna^{OPT}stanga dreapta^{OPT} intern extern spatiuspate cutspace instanga indreapta inmarginie marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta undeva effective antet subsol
- 2 REFERENCE
- 3 TEXT
- 4 CONTENT

instances: chemical figure table intermezzo graphic

`\punechemical [...1,...] [...2,...] {...3} {...4}`

- 1 split totdeauna stanga dreapta^{OPT} intern extern spatiuspate cutspace instanga indreapta inmarginie marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta undeva effective antet subsol
- 2 REFERENCE
- 3 TEXT
- 4 CONTENT

`\punefigure [...1,...] [...2,...] {...3} {...4}`

- 1 split totdeauna^{OPT}stanga dreapta^{OPT} intern extern spatiuspate cutspace instanga indreapta inmarginie marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta undeva effective antet subsol
- 2 REFERENCE
- 3 TEXT
- 4 CONTENT

`\punegraphic [...1,...] [...2,...] {...3} {...4}`

- 1 split totdeauna stanga dreapta^{OPT} intern extern spatiuspate cutspace instanga indreapta inmarginie marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta undeva effective antet subsol
- 2 REFERENCE
- 3 TEXT
- 4 CONTENT

`\puneintermezzo [...1,...] [...2,...] {...3} {...4}`

- 1 split totdeauna stanga^{OPT} dreapta^{OPT} intern extern spatiuspate cutspace instanga indreapta inmarginie marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta undeva effective antet subsol
- 2 REFERENCE
- 3 TEXT
- 4 CONTENT

`\punetable [...1,...] [...2,...] {...3} {...4}`

- 1 split totdeauna^{OPT}stanga dreapta^{OPT} intern extern spatiuspate cutspace instanga indreapta inmarginie marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta undeva effective antet subsol
- 2 REFERENCE
- 3 TEXT
- 4 CONTENT

`\placeframed [...1] [...2,...] {...3}`

- 1 NAME ^{OPT}
- 2 inherits: \seteazainconjurat
- 3 CONTENT

`\placeheadnumber [...]`

- * ABSCHNITT

<p><code>\placeheadtext [...]</code> * ABSCHNITT</p>
<p><code>\placehelp</code></p>
<p><code>\placeinitial [...]</code> * NAME <small>OPT</small></p>
<p><code>\placelayer [...]</code> * NAME</p>
<p><code>\placelayeredtext [¹...] [<small>2</small>...] [<small>3</small>...] {⁴} {⁵}</code> 1 NAME 2 inherits: \setuplayer 3 inherits: \setuplayeredtext 4 TEXT 5 CONTENT</p>
<p><code>\placelistofFLOATS [...[*]...]</code> * inherits: \seteazalista <small>OPT</small> instances: chemicals figures tables intermezzi graphics</p>
<p><code>\placelistofchemicals [...[*]...]</code> * inherits: \seteazalista <small>OPT</small></p>
<p><code>\placelistoffigures [...[*]...]</code> * inherits: \seteazalista <small>OPT</small></p>
<p><code>\placelistofgraphics [...[*]...]</code> * inherits: \seteazalista <small>OPT</small></p>
<p><code>\placelistofintermezzi [...[*]...]</code> * inherits: \seteazalista <small>OPT</small></p>
<p><code>\placelistoftables [...[*]...]</code> * inherits: \seteazalista <small>OPT</small></p>
<p><code>\placelistofpublications [¹...] [<small>2</small>...]</code> 1 NAME <small>OPT</small> <small>OPT</small> 2 inherits: \setupbt rendering</p>
<p><code>\placelistofsorts [¹...] [<small>2</small>...]</code> 1 SINGULAR <small>OPT</small> 2 inherits: \seteazasortare</p>
<p><code>\placelistofSORTS [...[*]...]</code> * inherits: \seteazasortare <small>OPT</small> instances: logos</p>
<p><code>\placelistoflogos [...[*]...]</code> * inherits: \seteazasortare <small>OPT</small></p>
<p><code>\placelistofsynonyms [¹...] [<small>2</small>...]</code> 1 SINGULAR <small>OPT</small> 2 inherits: \seteazasinonime</p>
<p><code>\placelistofSYNONYMS [...[*]...]</code> * inherits: \seteazasinonime <small>OPT</small> instances: abbreviations</p>

<pre> \placelistofabbreviations [...,.*,...] * inherits: \seteazasinonime OPT </pre>
<pre> \placelocalnotes [...,.*,...] 1 NAME OPT 2 inherits: \setupnote </pre>
<pre> \placement [...,.*,...] {...} 1 NAME OPT 2 inherits: \setupplacement 3 CONTENT </pre>
<pre> \PLACEMENT [...,.*,...] {...} 1 inherits: \setupplacement 2 CONTENT </pre>
<pre> \placenamefloat [...,.*,...] 1 NAME 2 REFERENCE </pre>
<pre> \placenameformula [...,.*,...] {...} {...} 1 + - REFERENCE OPT OPT 2 TEXT 3 TEXT </pre>
<pre> \placenotes [...,.*,...] [...,.*,...] 1 NAME OPT 2 inherits: \setupnote </pre>
<pre> \placepairedbox [...,.*,...] {...} {...} 1 NAME OPT 2 inherits: \setuppairedbox 3 CONTENT 4 TEXT </pre>
<pre> \punePAIREDBOX [...,.*,...] {...} {...} 1 inherits: \setuppairedbox 2 CONTENT 3 TEXT instances: legend </pre>
<pre> \punelegend [...,.*,...] {...} {...} 1 inherits: \setuppairedbox 2 CONTENT 3 TEXT </pre>
<pre> \placeparallel [...,.*,...] [...,.*,...] 1 NAME OPT 2 NAME 3 inherits: \setupparallel </pre>
<pre> \placerawlist [...,.*,...] 1 LISTE OPT 2 inherits: \seteazalista </pre>
<pre> \placereadingwindow [...,.*,...] 1 NAME OPT 2 NAME </pre>
<pre> \plaseazapegrid [...,.*,] {...} 1 normal standard da Strict tolerant sus subsol ambele broad ajustat primul ultim inalt unu jos niciunul linie strut box min max centru math math:linie math:jumatatelinie math:-line math:-halfline NAME 2 CONTENT </pre>

<pre> \plaseazapegrid [...¹,...²] {...} 1 inherits: \definegrids^{OPT}mapping 2 CONTENT </pre>
<pre> \plaseazasemecarte [...¹,...²] [...²,...³,...³] [...³,...³,...³] 1 ABSCHNITT LISTE OPT OPT OPT 2 ABSCHNITT LISTE 3 inherits: \setupbookmark </pre>
<pre> \popattribute *.. * CSNAME </pre>
<pre> \popmacro *.. * CSNAME </pre>
<pre> \popmode [...] * NAME </pre>
<pre> \popsystemmode {...} * NAME </pre>
<pre> \positionoverlay {...} * NAME </pre>
<pre> \positionregionoverlay {...} {...} 1 NAME 2 NAME </pre>
<pre> \postponenotes </pre>
<pre> \potrivestecamp [...¹] [...²,...²,...²] 1 NAME OPT 2 inherits: \setupfieldbody </pre>
<pre> \pozitie [...¹,...¹,...¹] (...²,...²) {...³} 1 inherits: \setare^{OPT}pozitie 2 POSITION 3 CONTENT </pre>
<pre> \predefinedfont [...] * FONT </pre>
<pre> \predefinefont [...¹] [...²] 1 NAME 2 FONT </pre>
<pre> \predefinesymbol [...] * NAME </pre>
<pre> \prefixedpagenumber </pre>
<pre> \prependetoks ... \to *.. 1 BEFEHL 2 CSNAME </pre>
<pre> \prependgvalue {...¹} {...²} 1 NAME 2 BEFEHL </pre>

<pre> \prependtocommalist {...} \^{2} 1 TEXT 2 CSNAME </pre>
<pre> \prependtoks ... \to \^{2} 1 BEFEHL 2 CSNAME </pre>
<pre> \prependtoksonce ... \to \^{2} 1 BEFEHL 2 CSNAME </pre>
<pre> \prependvalue {...} {...} 1 NAME 2 BEFEHL </pre>
<pre> \prerollblank [...,*...] * inherits: \blanc </pre>
<pre> \presetdocument [...,*...] * inherits: \setupdocument </pre>
<pre> \presetfieldsymbols [...,*...] * NAME </pre>
<pre> \presetLABELtext [...^{1}] [...,^{2}...] 1 SPRACHE OPT 2 KEY = VALUE instances: head label mathlabel taglabel unit operator prefix suffix btxlabel </pre>
<pre> \presetbtxlabeltext [...^{1}] [...,^{2}...] 1 SPRACHE OPT 2 KEY = VALUE </pre>
<pre> \presetheadtext [...^{1}] [...,^{2}...] 1 SPRACHE OPT 2 KEY = VALUE </pre>
<pre> \presetlabeltext [...^{1}] [...,^{2}...] 1 SPRACHE OPT 2 KEY = VALUE </pre>
<pre> \presetmathlabeltext [...^{1}] [...,^{2}...] 1 SPRACHE OPT 2 KEY = VALUE </pre>
<pre> \presetoperatortext [...^{1}] [...,^{2}...] 1 SPRACHE OPT 2 KEY = VALUE </pre>
<pre> \presetprefixtext [...^{1}] [...,^{2}...] 1 SPRACHE OPT 2 KEY = VALUE </pre>
<pre> \presetsuffixtext [...^{1}] [...,^{2}...] 1 SPRACHE OPT 2 KEY = VALUE </pre>
<pre> \presettaglabeltext [...^{1}] [...,^{2}...] 1 SPRACHE OPT 2 KEY = VALUE </pre>

<pre> \presetunittext [...] [...²...] 1 SPRACHE OPT 2 KEY = VALUE </pre>
<pre> \pretocommalist {...} \²... 1 TEXT 2 CSNAME </pre>
<pre> \prettyprintbuffer {...} {...} 1 BUFFER 2 mp lua xml parsed-xml nested tex context niciunul NAME </pre>
<pre> \prevcounter [...] [...²] 1 NAME OPT 2 NUMMER </pre>
<pre> \prevcountervalue [...[*]] * NAME </pre>
<pre> \preventmode [...[*]...] * NAME </pre>
<pre> \prevrealpage </pre>
<pre> \prevrealpagenumber </pre>
<pre> \prevsubcountervalue [...¹] [...²] 1 NAME 2 NUMMER </pre>
<pre> \prevsubpage </pre>
<pre> \prevsubpagenumber </pre>
<pre> \prevuserpage </pre>
<pre> \prevuserpagenumber </pre>
<pre> \primasubpagina </pre>
<pre> \procent </pre>
<pre> \proceseazabloc [...¹...] [...²...] [...³...] 1 NAME OPT OPT 2 NAME 3 criteriu = text ABSCHNITT </pre>
<pre> \processaction [...¹] [...²...] 1 BEFEHL 2 APPLY </pre>
<pre> \processallactionsinset [...¹] [...²...] 1 BEFEHL 2 APPLY </pre>
<pre> \processassignlist [...¹...] \²... 1 TEXT 2 CSNAME </pre>

<pre> \processassignmentcommand [...,¹...,...] \²... 1 KEY = VALUE 2 CSNAME </pre>
<pre> \processassignmentlist [...,¹...,...] \²... 1 KEY = VALUE 2 CSNAME </pre>
<pre> \processbetween {...} \²... 1 NAME 2 CSNAME </pre>
<pre> \processbodyfontenvironmentlist *... * CSNAME </pre>
<pre> \processcolorcomponents {...} * COLOR </pre>
<pre> \processcommacommand [...,¹...,...] \²... 1 BEFEHL 2 CSNAME </pre>
<pre> \processcommalist [...,¹...,...] \²... 1 BEFEHL 2 CSNAME </pre>
<pre> \processcommalistwithparameters [...,¹...,...] \²... 1 BEFEHL 2 CSNAME </pre>
<pre> \processcontent {...} \²... 1 NAME 2 CSNAME </pre>
<pre> \processfile {...} * FILE </pre>
<pre> \processfilemany {...} * FILE </pre>
<pre> \processfilenone {...} * FILE </pre>
<pre> \processfileonce {...} * FILE </pre>
<pre> \processfirstactioninset [...,¹...] [...,²...,...] 1 BEFEHL 2 APPLY </pre>
<pre> \processisolatedchars {...} \²... 1 TEXT 2 CSNAME </pre>
<pre> \processisolatedwords {...} \²... 1 TEXT 2 CSNAME </pre>
<pre> \processlinetablebuffer [...¹...] * BUFFER OPT </pre>

<pre> \processlinetablefile {...} * FILE </pre>
<pre> \processlist {...} {...} {...} \^4.. 1 CHARACTER 2 CHARACTER 3 TEXT 4 CSNAME </pre>
<pre> \processMPbuffer [...,*...] * NAME OPT </pre>
<pre> \processMPfigurefile {...} * FILE </pre>
<pre> \processmonth {...} {...} {...} 1 NUMMER 2 NUMMER 3 BEFEHL </pre>
<pre> \processranges [...,¹...] \^2.. 1 NUMMER NUMMER:NUMMER 2 CSNAME </pre>
<pre> \processseparatedlist [...¹] [...²] {...³} 1 TEXT 2 TEXT 3 CSNAME BEFEHL </pre>
<pre> \processTEXbuffer [...] * BUFFER OPT </pre>
<pre> \processtokens {...} {...} {...} {...} {...} 1 BEFEHL 2 BEFEHL 3 BEFEHL 4 BEFEHL 5 TEXT </pre>
<pre> \processuntil \^*.. * CSNAME </pre>
<pre> \processxtablebuffer [...] * NAME OPT </pre>
<pre> \processyear {...} {...} {...} {...} 1 NUMMER 2 BEFEHL 3 BEFEHL 4 BEFEHL </pre>
<pre> \produs [...] * FILE </pre>
<pre> \produs \^*.. * FILE </pre>
<pre> \profiledbox [...] [...,²...] {...} 1 niciunul fixat fixat half^{OPT}fixed quarterfixed eightsfixed NAME 2 inherits: \setupprofile 3 CONTENT </pre>

<p><code>\profilegivenbox {...} ..</code> 1 niciunul fixat strict^{OPT}halffixed quarterfixed eightsfixed NAME 2 CSNAME NUMBER</p>
<p><code>\program [...]</code> * NAME</p>
<p><code>\proiect [...]</code> * FILE</p>
<p><code>\proiect ..</code> * FILE</p>
<p><code>\pseudoMixedCapped {...}</code> * TEXT</p>
<p><code>\pseudoSmallCapped {...}</code> * TEXT</p>
<p><code>\pseudoSmallcapped {...}</code> * TEXT</p>
<p><code>\pseudosmallcapped {...}</code> * TEXT</p>
<p><code>\punct {...}</code> * CHARACTER</p>
<p><code>\puncte [...]</code> * NUMBER ^{OPT}</p>
<p><code>\puncte [...,*,*,*,*]</code> * inherits: \set^{OPT}upperperiods</p>
<p><code>\punedeasuprafiecareia {...} {...}</code> 1 CONTENT 2 CONTENT</p>
<p><code>\punefatainfata {...} {...}</code> 1 CONTENT 2 CONTENT</p>
<p><code>\puneformula [...,¹...] {...²}</code> 1 + - REFERENCE ^{OPT} ^{OPT} 2 TEXT</p>
<p><code>\punelista [...,¹...] [...,²*,*,*,*]</code> 1 LISTE ^{OPT} 2 inherits: \seteazalista</p>
<p><code>\punelistacombinata [...¹] [...,²*,*,*,*]</code> 1 LISTE ^{OPT} 2 inherits: \seteazalistacombinata</p>
<p><code>\puneCOMBINEDLIST [...,**,*,*]</code> * inherits: \seteazalistacombinata^{OPT} instances: content</p>

<p><code>\punecontent [...*...]</code> * inherits: \seteazalistacombinata</p>
<p><code>\punenotesubsol [...*...]</code> * inherits: \setupnote OPT</p>
<p><code>\punenotesubsolocale [...*...]</code> * inherits: \setupnote OPT</p>
<p><code>\punenumarpagina</code></p>
<p><code>\puneregistru [...¹][...²...]</code> 1 NAME OPT 2 inherits: \seteazaregistru</p>
<p><code>\puneREGISTER [...*...]</code> * inherits: \seteazaregistru instances: index</p>
<p><code>\puneindex [...*...]</code> * inherits: \seteazaregistru</p>
<p><code>\punesubformula [...¹...]{...²}</code> 1 + - REFERENCE OPT OPT 2 TEXT</p>
<p><code>\purenumber {...}</code> * NUMMER</p>
<p><code>\pusharrangedpages ... \poparrangedpages</code></p>
<p><code>\pushattribute *...</code> * CSNAME</p>
<p><code>\pushbar [...] ... \popbar</code> * NAME</p>
<p><code>\pushbutton [...¹][...²]</code> 1 NAME 2 REFERENCE</p>
<p><code>\pushcatcodetable ... \popcatcodetable</code></p>
<p><code>\pushculoare [...] ... \popculoare</code> * COLOR</p>
<p><code>\pushendofline ... \popendofline</code></p>
<p><code>\pushfundal [...] ... \popfundal</code> * NAME</p>
<p><code>\pushindentation ... \popindentation</code></p>
<p><code>\pushMPdrawing ... \popMPdrawing</code></p>
<p><code>\pushmacro *...</code> * CSNAME</p>

<code>\pushmathstyle ... \popmathstyle</code>
<code>\pushmode [...]</code> * NAME
<code>\pushoutputstream [...]</code> * NAME <small>OPT</small>
<code>\pushpath [...] ... \poppath</code> * PATH
<code>\pushpunctuation ... \poppunctuation</code>
<code>\pushrandomseed ... \poprandomseed</code>
<code>\pushreferenceprefix {...} ... \popreferenceprefix</code> * + - TEXT
<code>\pushsystemmode {...}</code> * NAME
<code>\putboxincache {...} {...} ...</code> 1 NAME 2 NUMBER TEXT 3 CSNAME NUMBER
<code>\putnextboxincache {...} {...} \^3... {...}</code> 1 NAME 2 NUMBER TEXT 3 CSNAME 4 CONTENT
<code>\qqquad</code>
<code>\quad</code>
<code>\quads [...]</code> * NUMBER <small>OPT</small>
<code>\quarterstrut</code>
<code>\quitcommalist</code>
<code>\quitprevcommalist</code>
<code>\quittypescriptscanning</code>
<code>\ReadFile {...}</code> * FILE
<code>\raggedbottom</code>
<code>\raggedcenter</code>
<code>\raggedleft</code>

<code>\raggedright</code>
<code>\raggedwidecenter</code>
<code>\raisebox {¹.} \²... {³.}</code> 1 DIMENSION 2 CSNAME 3 CONTENT
<code>\randomizetext {[*].}</code> * TEXT
<code>\randomnumber {¹.} {².}</code> 1 NUMBER 2 NUMBER
<code>\rawcounter [¹.] [².]</code> 1 NAME <small>OPT</small> 2 NUMBER
<code>\rawcountervalue [[*].]</code> * NAME
<code>\rawdate [...,[*]...]</code> * inherits: \datacurrency
<code>\rawdoifelseinset {¹.} {...,²...} {³.} {⁴.}</code> 1 TEXT 2 TEXT 3 TRUE 4 FALSE
<code>\rawdoifinset {¹.} {...,²...} {³.}</code> 1 TEXT 2 TEXT 3 TRUE
<code>\rawdoifinsetelse {¹.} {...,²...} {³.} {⁴.}</code> 1 TEXT 2 TEXT 3 TRUE 4 FALSE
<code>\rawgetparameters [¹.] [...,²...]</code> 1 TEXT 2 KEY = VALUE
<code>\rawprocessaction [¹.] [...,²...]</code> 1 BEFEHL 2 APPLY
<code>\rawprocesscommand [...,¹...] \²...</code> 1 BEFEHL 2 CSNAME
<code>\rawprocesscommalist [...,¹...] \²...</code> 1 BEFEHL 2 CSNAME
<code>\rawstructurelistuservariable {[*].}</code> * KEY

\rawsubcountervalue [¹..] [²..]

- 1 NAME
- 2 NUMBER

\rbox ¹.. {²..}

- 1 TEXT ^{OPT}
- 2 CONTENT

\readfile {¹..} {²..} {³..}

- 1 FILE
- 2 TRUE
- 3 FALSE

\readfixfile {¹..} {²..} {³..} {⁴..}

- 1 PATH
- 2 FILE
- 3 TRUE
- 4 FALSE

\readjobfile {¹..} {²..} {³..}

- 1 FILE
- 2 TRUE
- 3 FALSE

\readlocfile {¹..} {²..} {³..}

- 1 FILE
- 2 TRUE
- 3 FALSE

\readsetfile {¹..} {²..} {³..} {⁴..}

- 1 PATH
- 2 FILE
- 3 TRUE
- 4 FALSE

\readsysfile {¹..} {²..} {³..}

- 1 FILE
- 2 TRUE
- 3 FALSE

\readtexfile {¹..} {²..} {³..}

- 1 FILE
- 2 TRUE
- 3 FALSE

\readxmlfile {¹..} {²..} {³..}

- 1 FILE
- 2 TRUE
- 3 FALSE

\realpagenumber

\realSmallCapped {^{*}..}

- * TEXT

\realSmallcapped {^{*}..}

- * TEXT

\realSmallcapped {^{*}..}

- * TEXT

\recursedepth

<code>\recurselevel</code>
<code>\recursestring</code>
<code>\redoconvertfont</code>
<code>\ref [...¹] [...²]</code> 1 implicit text titlu numar pagina realpage 2 REFERENCE
<code>\REFERENCEFORMAT {...¹} {...²} [...³]</code> 1 TEXT OPT OPT 2 TEXT 3 REFERENCE
<code>\referenceprefix</code>
<code>\referinta [...¹,...] {...²}</code> 1 REFERENCE 2 TEXT
<code>\referintapagina [...[*],...]</code> * REFERENCE
<code>\referintatext [...¹,...] {...²}</code> 1 REFERENCE 2 TEXT
<code>\referring (...¹,...) (...²,...) [...³]</code> 1 POSITION 2 POSITION 3 REFERENCE
<code>\reflexie {...[*]}</code> * CONTENT
<code>\registerattachment [...¹] [...²,...²,...]</code> 1 NAME 2 inherits: \setupattachment
<code>\registerctxluafile {...¹} {...²}</code> 1 FILE 2 NUMMER
<code>\registerexternalfigure [...¹] [...²] [...³,...³,...]</code> 1 FILE OPT OPT 2 NAME 3 inherits: \setupexternalfigure
<code>\registerfontclass {...[*]}</code> * NAME
<code>\registerhyphenationexception [...¹] [...²]</code> 1 SPRACHE OPT 2 TEXT
<code>\registerhyphenationpattern [...¹] [...²]</code> 1 SPRACHE OPT 2 TEXT

<pre> \registermenubuttons [...] [...] 1 NAME 2 TEXT </pre>
<pre> \registersort [...] [...] 1 SINGULAR 2 NAME </pre>
<pre> \registersynonym [...] [...] 1 SINGULAR 2 NAME </pre>
<pre> \registerunit [...] [...,.,.².,.,.] 1 prefix unitate operator suffixe simbol packaged 2 KEY = VALUE </pre>
<pre> \REGISTER [...] {...+².+..} 1 TEXT PROCESSOR->TEXT 2 INDEX instances: index </pre>
<pre> \index [...] {...+².+..} 1 TEXT PROCESSOR->TEXT 2 INDEX </pre>
<pre> \REGISTER [...] {².} {...+³.+..} 1 TEXT PROCESSOR->TEXT 2 TEXT 3 INDEX instances: index </pre>
<pre> \index [...] {².} {...+³.+..} 1 TEXT PROCESSOR->TEXT 2 TEXT 3 INDEX </pre>
<pre> \regular </pre>
<pre> \relatemarking [...] [...] 1 BESCHRIFTUNG 2 BESCHRIFTUNG </pre>
<pre> \relateparameterhandlers {¹.} {².} {³.} {⁴.} 1 NAME 2 NAME 3 NAME 4 NAME </pre>
<pre> \relaxvalueifundefined {*.} * NAME </pre>
<pre> \remainingcharacters </pre>
<pre> \remarca (...¹,...) (...²,...) [...,.,.³.,.,.] {⁴.} 1 POSITION 2 POSITION 3 inherits: \seteazainconjurat 4 TEXT </pre>
<pre> \removebottomthings </pre>

<code>\removedepth</code>
<code>\removefromcommalist {...} \^{2..}</code> 1 TEXT 2 CSNAME
<code>\removelastskip</code>
<code>\removelastspace</code>
<code>\removemarkedcontent [...]</code> * NAME
<code>\removepunctuation</code>
<code>\removesubstring \^{1..} \from \^{2..} \to \^{3..}</code> 1 TEXT 2 TEXT 3 CSNAME
<code>\removetoks \^{1..} \from \^{2..}</code> 1 BEFEHL 2 CSNAME
<code>\removeunwantedspaces</code>
<code>\replacefeature [...]</code> * NAME
<code>\replacefeature {...}</code> * NAME
<code>\replaceincommalist \^{1..} \{ \^{2..}</code> 1 CSNAME 2 NUMMER
<code>\replaceword [...] [...] [...]</code> 1 NAME 2 TEXT 3 TEXT
<code>\rescan {...}</code> * CONTENT
<code>\rescanwithsetup {...} {...}</code> 1 NAME 2 CONTENT
<code>\resetallattributes</code>
<code>\resetandaddfeature [...]</code> * NAME
<code>\resetandaddfeature {...}</code> * NAME
<code>\resetbar</code>

<pre>\resetboxesincache {...} * NAME</pre>
<pre>\resetbreakpoints</pre>
<pre>\resetbuffer [...] * BUFFER</pre>
<pre>\resetcharacteralign</pre>
<pre>\resetcharacterkerning</pre>
<pre>\resetcharacterspacing</pre>
<pre>\resetcharacterstripping</pre>
<pre>\resetcollector [...] * NAME</pre>
<pre>\resetcounter [1.] [2.] 1 NAME OPT 2 NUMMER</pre>
<pre>\resetdigitsmanipulation</pre>
<pre>\resetdirection</pre>
<pre>\reseteazamarcaje {...} * BESCHRIFTUNG</pre>
<pre>\resetfeature</pre>
<pre>\resetflag {...} * NAME</pre>
<pre>\resetfontcolorsheme</pre>
<pre>\resetfontfallback [1.] [2.] 1 NAME OPT 2 FONT</pre>
<pre>\resetfontsolution</pre>
<pre>\resethyphenationfeatures</pre>
<pre>\resetinjector [...] * NAME</pre>
<pre>\resetinteractionmenu [...] * NAME</pre>
<pre>\resetitaliccorrection</pre>
<pre>\resetlayer [...] * NAME</pre>

<code>\resettrialtypesetting</code>
<code>\resetusedsortings [...]</code> * SINGULAR
<code>\resetusedsynonyms [...]</code> * SINGULAR
<code>\resetuserpagenumber</code>
<code>\resetvalue {...}</code> * NAME
<code>\resetvisualizers</code>
<code>\reshapebox {...}</code> * BEFEHL
<code>\resolvedglyphdirect {...} {...}</code> 1 FONT 2 e:NAME x:NUMMER d:NUMMER s:NUMMER i:NUMMER n:NAME c:NAME u:NAME a:NAME
<code>\resolvedglyphstyled {...} {...}</code> 1 FONT 2 e:NAME x:NUMMER d:NUMMER s:NUMMER i:NUMMER n:NAME c:NAME u:NAME a:NAME
<code>\restartcounter [...] [...] [...]</code> 1 NAME 2 NUMBER 3 NUMBER
<code>\restorebox {...} {...}</code> 1 NAME 2 NAME
<code>\restorecatcodes</code>
<code>\restorecounter [...]</code> * NAME
<code>\restorecurrentattributes {...}</code> * NAME
<code>\restoreendofline</code>
<code>\restoreglobalbodyfont</code>
<code>\reusableMPgraphic {...} {...²...}</code> 1 NAME 2 KEY = VALUE
<code>\reuseMPgraphic {...} {...²...}</code> 1 NAME 2 KEY = VALUE
<code>\reuserandomseed</code>
<code>\revivefeature</code>

<pre>\rfence {...} * CHARACTER</pre>
<pre>\rhbox {...} * CONTENT</pre>
<pre>\rightbottombox {...} * CONTENT</pre>
<pre>\rightbox {...} * CONTENT</pre>
<pre>\righthbox {...} * CONTENT</pre>
<pre>\rightLABELtext {...} * KEY instances: head label mathlabel</pre>
<pre>\rightheadtext {...} * KEY</pre>
<pre>\rightlabeltext {...} * KEY</pre>
<pre>\rightmathlabeltext {...} * KEY</pre>
<pre>\rightline {...} * CONTENT</pre>
<pre>\rightorleftpageaction {...} {...} 1 BEFEHL 2 BEFEHL</pre>
<pre>\rightskipadaption</pre>
<pre>\rightsubguillemot</pre>
<pre>\righttopleft</pre>
<pre>\righttopleftthbox ...¹ {...} 1 TEXT OPT 2 CONTENT</pre>
<pre>\righttopleftvbox ...¹ {...} 1 TEXT OPT 2 CONTENT</pre>
<pre>\righttopleftvtop ...¹ {...} 1 TEXT OPT 2 CONTENT</pre>
<pre>\righttopbox {...} * CONTENT</pre>

`\riglatext [...]{...}`

1 sus centru subsol OPT
2 TEXT

`\rigleumplere [...]{...}{...}`

1 inherits: \seteazarigleumplere OPT OPT
2 TEXT
3 TEXT

`\ring {...}`

* CHARACTER

`\rlap {...}`

* CONTENT

`\robustaddtocommalist {...} \^2..`

1 TEXT
2 CSNAME

`\robustdoifelseinset {...} {...} {...} {...}`

1 TEXT
2 TEXT
3 TRUE
4 FALSE

`\robustdoifinsetelse {...} {...} {...} {...}`

1 TEXT
2 TEXT
3 TRUE
4 FALSE

`\robustpretocommalist {...} \^2..`

1 TEXT
2 CSNAME

`\rollbutton [...]{...} .^2. [...]`

1 inherits: \setupbutton
2 TEXT
3 REFERENCE

`\rollbutton [...]{...}{...} .^3. [...]`

1 NAME OPT OPT
2 inherits: \seteazameniuiinteractiune
3 TEXT
4 REFERENCE

`\roman`

`\roteste [...]{...}`

1 inherits: \seteazarotare OPT
2 CONTENT

`\rtop .^1. {...}`

1 TEXT OPT
2 CONTENT

`\ruby [...]{...}{...}`

1 NAME OPT
2 TEXT
3 TEXT

<pre> \ruledhbox ¹... {²...} 1 TEXT OPT 2 CONTENT </pre>
<pre> \ruledhpack ¹... {²...} 1 TEXT OPT 2 CONTENT </pre>
<pre> \ruledmbox {...} * CONTENT </pre>
<pre> \ruledtopv ¹... {²...} 1 TEXT OPT 2 CONTENT </pre>
<pre> \ruledtpack ¹... {²...} 1 TEXT OPT 2 CONTENT </pre>
<pre> \ruledvbox ¹... {²...} 1 TEXT OPT 2 CONTENT </pre>
<pre> \ruledvpack ¹... {²...} 1 TEXT OPT 2 CONTENT </pre>
<pre> \ruledvtop ¹... {²...} 1 TEXT OPT 2 CONTENT </pre>
<pre> \runMPbuffer [...*...] * NAME OPT </pre>
<pre> \runninghbox {...} * CONTENT </pre>
<pre> \ScaledPointsToBigPoints {¹...} \²... 1 DIMENSION 2 CSNAME </pre>
<pre> \ScaledPointsToWholeBigPoints {¹...} \²... 1 DIMENSION 2 CSNAME </pre>
<pre> \Smallcapped {...} * TEXT </pre>
<pre> \safechar {...} * NUMBER </pre>
<pre> \samplefile {...} * FILE </pre>
<pre> \sans </pre>
<pre> \sansaldin </pre>
<pre> \sansnormal </pre>

<code>\sansserif</code>
<code>\savebox {¹...} {²...} {³...}</code> 1 NAME 2 NAME 3 CONTENT
<code>\savebtxdataset [¹...] [²...] [³...³...]</code> 1 NAME OPT OPT OPT 2 FILE 3 dataset = NAME type = bib lua xml fisier = FILE criteriu = tot text intro referinta curent aici precedent local componenta SECTIONBLOCK:tot SECTIONBLOCK:referinta SECTIONBLOCK:curent SECTIONBLOCK:precedent
<code>\savebuffer [...[*]...]</code> * lista = NAME fisier = FILE prefix = da nu
<code>\savebuffer [...¹...] [²...]</code> 1 BUFFER 2 FILE
<code>\savecounter [...]</code> * NAME
<code>\saveculoare ... \restoreculoare</code>
<code>\savecurrentattributes {[*]...}</code> * NAME
<code>\savenormalmeaning \[*]...</code> * CSNAME
<code>\savetaggedtwopassdata {¹...} {²...} {³...} {⁴...}</code> 1 NAME 2 NUMBER 3 NAME 4 CONTENT
<code>\savetwopassdata {¹...} {²...} {³...}</code> 1 NAME 2 NUMBER 3 CONTENT
<code>\sbox {[*]...}</code> * CONTENT
<code>\scala [¹...] [²...²...] {³...}</code> 1 NAME OPT OPT 2 inherits: \setupscale 3 CONTENT
<code>\scriebuffer [...¹...] [...²...]</code> 1 BUFFER OPT OPT 2 inherits: \seteazatyping
<code>\typeBUFFER [...[*]...]</code> * inherits: \seteazatyping

```
\scrieinlista [..] [..,..2..,..] {..} {..}
1 LISTE
2 inherits: \seteazalista
3 NUMMER
4 TEXT
```

```
\scrieintreliste [..] [..,..2..,..] {..}
1 LISTE
2 inherits: \seteazalista
3 BEFEHL
```

```
\SCRIPT
instances: hangul hanzi nihongo ethiopic thai latin test
```

```
\ethiopic
```

```
\hangul
```

```
\hanzi
```

```
\latin
```

```
\nihongo
```

```
\test
```

```
\thai
```

```
\scrismanual
```

```
\secondoffivearguments {..} {..} {..} {..} {..}
1 TEXT
2 TEXT
3 TEXT
4 TEXT
5 TEXT
```

```
\secondoffourarguments {..} {..} {..} {..}
1 TEXT
2 TEXT
3 TEXT
4 TEXT
```

```
\secondofsixarguments {..} {..} {..} {..} {..} {..}
1 TEXT
2 TEXT
3 TEXT
4 TEXT
5 TEXT
6 TEXT
```

```
\secondofthreearguments {..} {..} {..}
1 TEXT
2 TEXT
3 TEXT
```

```
\secondofthreeunexpanded {..} {..} {..}
1 TEXT
2 TEXT
3 TEXT
```


`\secondoftwoarguments {...} {...}`

- 1 TEXT
- 2 TEXT

`\secondoftwounexpanded {...} {...}`

- 1 TEXT
- 2 TEXT

`\SECTION [...,1...] {...}`

- 1 REFERENCE OPT
- 2 TEXT

instances: part chapter section subsection subsection subsection subsection subsection
title subject subsubject subsubsubject subsubsubsubject subsubsubsubsubject

`\SECTION [...,.*...] [...]`

- * titlu = TEXT
- semncarte = TEXT
- marcaje = TEXT
- lista = TEXT
- referinta = REFERENCE
- numarpropriu = TEXT

instances: part chapter section subsection subsection subsection subsection subsection
title subject subsubject subsubsubject subsubsubsubject subsubsubsubsubject

`\chapter [...,.*...] [...]`

- * titlu = TEXT
- semncarte = TEXT
- marcaje = TEXT
- lista = TEXT
- referinta = REFERENCE
- numarpropriu = TEXT

`\part [...,.*...] [...]`

- * titlu = TEXT
- semncarte = TEXT
- marcaje = TEXT
- lista = TEXT
- referinta = REFERENCE
- numarpropriu = TEXT

`\section [...,.*...] [...]`

- * titlu = TEXT
- semncarte = TEXT
- marcaje = TEXT
- lista = TEXT
- referinta = REFERENCE
- numarpropriu = TEXT

`\subject [...,.*...] [...]`

- * titlu = TEXT
- semncarte = TEXT
- marcaje = TEXT
- lista = TEXT
- referinta = REFERENCE
- numarpropriu = TEXT

`\subsection [...,.*...] [...]`

- * titlu = TEXT
- semncarte = TEXT
- marcaje = TEXT
- lista = TEXT
- referinta = REFERENCE
- numarpropriu = TEXT

`\subsubject [.,..*.,..]`

* titlu = TEXT
semncarte = TEXT
marcaje = TEXT
lista = TEXT
referinta = REFERENCE
numarpropriu = TEXT

`\subsubsection [.,..*.,..]`

* titlu = TEXT
semncarte = TEXT
marcaje = TEXT
lista = TEXT
referinta = REFERENCE
numarpropriu = TEXT

`\subsubsubject [.,..*.,..]`

* titlu = TEXT
semncarte = TEXT
marcaje = TEXT
lista = TEXT
referinta = REFERENCE
numarpropriu = TEXT

`\subsubsubsection [.,..*.,..]`

* titlu = TEXT
semncarte = TEXT
marcaje = TEXT
lista = TEXT
referinta = REFERENCE
numarpropriu = TEXT

`\subsubsubsubject [.,..*.,..]`

* titlu = TEXT
semncarte = TEXT
marcaje = TEXT
lista = TEXT
referinta = REFERENCE
numarpropriu = TEXT

`\subsubsubsubsection [.,..*.,..]`

* titlu = TEXT
semncarte = TEXT
marcaje = TEXT
lista = TEXT
referinta = REFERENCE
numarpropriu = TEXT

`\subsubsubsubsubject [.,..*.,..]`

* titlu = TEXT
semncarte = TEXT
marcaje = TEXT
lista = TEXT
referinta = REFERENCE
numarpropriu = TEXT

`\title [.,..*.,..]`

* titlu = TEXT
semncarte = TEXT
marcaje = TEXT
lista = TEXT
referinta = REFERENCE
numarpropriu = TEXT

`\chapter [.,..1.,..] {.,.2}`

1 REFERENCE ^{OPT}
2 TEXT

`\SECTION [...,1...] {...} {...}`

- 1 REFERENCE OPT
- 2 NUMBER
- 3 TEXT

instances: part chapter section subsection subsection subsection subsection subsection
title subject subsubject subsubject subsubject subsubject subsubject

`\chapter [...,1...] {...} {...}`

- 1 REFERENCE OPT
- 2 NUMBER
- 3 TEXT

`\part [...,1...] {...} {...}`

- 1 REFERENCE OPT
- 2 NUMBER
- 3 TEXT

`\section [...,1...] {...} {...}`

- 1 REFERENCE OPT
- 2 NUMBER
- 3 TEXT

`\subject [...,1...] {...} {...}`

- 1 REFERENCE OPT
- 2 NUMBER
- 3 TEXT

`\subsection [...,1...] {...} {...}`

- 1 REFERENCE OPT
- 2 NUMBER
- 3 TEXT

`\subsubject [...,1...] {...} {...}`

- 1 REFERENCE OPT
- 2 NUMBER
- 3 TEXT

`\subsection [...,1...] {...} {...}`

- 1 REFERENCE OPT
- 2 NUMBER
- 3 TEXT

`\subsubsection [...,1...] {...} {...}`

- 1 REFERENCE OPT
- 2 NUMBER
- 3 TEXT

`\subsubsection [...,1...] {...} {...}`

- 1 REFERENCE OPT
- 2 NUMBER
- 3 TEXT

`\subsubsection [...,1...] {...} {...}`

- 1 REFERENCE OPT
- 2 NUMBER
- 3 TEXT

`\subsubsection [...,1...] {...} {...}`

- 1 REFERENCE OPT
- 2 NUMBER
- 3 TEXT

`\subsubsubsubject [...,1...] {...} {...}`

- 1 REFERENCE OPT
- 2 NUMBER
- 3 TEXT

`\title [...,1...] {...} {...}`

- 1 REFERENCE OPT
- 2 NUMBER
- 3 TEXT

`\part [...,1...] {...}`

- 1 REFERENCE OPT
- 2 TEXT

`\section [...,1...] {...}`

- 1 REFERENCE OPT
- 2 TEXT

`\subject [...,1...] {...}`

- 1 REFERENCE OPT
- 2 TEXT

`\subsection [...,1...] {...}`

- 1 REFERENCE OPT
- 2 TEXT

`\subsubject [...,1...] {...}`

- 1 REFERENCE OPT
- 2 TEXT

`\subsubsection [...,1...] {...}`

- 1 REFERENCE OPT
- 2 TEXT

`\subsubsubject [...,1...] {...}`

- 1 REFERENCE OPT
- 2 TEXT

`\subsubsubsection [...,1...] {...}`

- 1 REFERENCE OPT
- 2 TEXT

`\subsubsubsubject [...,1...] {...}`

- 1 REFERENCE OPT
- 2 TEXT

`\subsubsubsubsection [...,1...] {...}`

- 1 REFERENCE OPT
- 2 TEXT

`\subsubsubsubsubject [...,1...] {...}`

- 1 REFERENCE OPT
- 2 TEXT

`\title [...,1...] {...}`

- 1 REFERENCE OPT
- 2 TEXT

```
\veziREGISTER [..1.] {...2.+..2.+..} {...3.}
1 TEXT PROCESSOR->TEXT
2 INDEX
3 TEXT PROCESSOR->TEXT
instances: index
```

```
\veziindex [..1.] {...2.+..2.+..} {...3.}
1 TEXT PROCESSOR->TEXT
2 INDEX
3 TEXT PROCESSOR->TEXT
```

```
\select {..1.} {..2.} {..3.} {..4.} {..5.} {..6.}
1 NAME OPT OPT OPT OPT OPT
2 CONTENT
3 CONTENT
4 CONTENT
5 CONTENT
6 CONTENT
```

```
\selecteazablocuri [...1,...] [...2,...] [...3,...]
1 NAME OPT OPT
2 NAME
3 criteriu = text ABSCHNITT
```

```
\semncarte [..1.] {...2.}
1 ABSCHNITT LISTE
2 TEXT
```

```
\serializecommalist [...*,...]
* BEFEHL
```

```
\serializedcommalist
```

```
\serif
```

```
\serifbold
```

```
\serifnormal
```

```
\setare [..*.]
* NAME
```

```
\setareitemization [...1,...] [...2,...]
1 NAME NAME:NUMBER OPT
2 inherits: \setupitemgroup
```

```

\setarelimba [...] [...]
1 SPRACHE implicitOPT
2 implicit = SPRACHE
  stare = start stop
  data = inherits: \datacurenta
  patterns = FILE
  lefthyphenmin = NUMBER
  righthyphenmin = NUMBER
  lefthyphenchar = NUMBER
  righthyphenchar = NUMBER
  setups = NAME
  spatiere = broad impachetat
  font = auto
  bidi = stanga dreapta l2r r2l
  text = TEXT
  limittext = TEXT
  hyphen = TEXT
  compoundhyphen = TEXT
  leftcompoundhyphen = TEXT
  rightcompoundhyphen = TEXT
  minicitatstanga = BEFEHL
  minicitatdreapta = BEFEHL
  citatstanga = BEFEHL
  citatdreapta = BEFEHL
  leftspeech = BEFEHL
  rightspeech = BEFEHL
  propozitiestanga = BEFEHL
  middlespeech = BEFEHL
  propozitiedreapta = BEFEHL
  midsentence = BEFEHL
  subpropozitiestanga = BEFEHL
  subpropozitiedreapta = BEFEHL
  factor = da nu

```

```

\setarepozitie [...] [...]
1 NAME OPT
2 offset = da nu
  unitate = ex em pt in cm mm sp bp pc dd cc nc
  stare = start overlay
  xoffset = DIMENSION
  yoffset = DIMENSION
  xstep = absolut relativ
  ystep = absolut relativ
  xscala = NUMBER
  yscala = NUMBER
  xfactor = NUMBER
  yfactor = NUMBER
  factor = NUMBER
  scala = NUMBER

```

```

\setare {...}
* NAME

```

```

\setbar [...]
* NAME

```

```

\setbigbodyfont

```

```

\setboxllx ... {...}
1 CSNAME NUMBER
2 DIMENSION

```

```

\setboxlly ... {...}
1 CSNAME NUMBER
2 DIMENSION

```

```

\setbreakpoints [...]
* reset NAME

```

```

\setbuffer [...] ... \endbuffer
* NAME

```

<code>\setcapstrut</code>
<code>\setcatcodetable *..</code> * CSNAME
<code>\setcharacteralign {...} {...}</code> 1 NUMBER 2 TEXT number->TEXT text->TEXT
<code>\setcharacteraligndetail {...} {...} {...} {...}</code> 1 NUMBER 2 TEXT number->TEXT text->TEXT 3 DIMENSION 4 DIMENSION
<code>\setcharactercasing [...]</code> * reset CUVANT cuvânt Cuvant Cuvinte majuscula Majuscula niciunul aleator mixed camel cap Cap
<code>\setcharactercleaning [...]</code> * reset 1
<code>\setcharacterkerning [...]</code> * reset NAME
<code>\setcharacterspacing [...]</code> * reset NAME
<code>\setcharacterstripping [...]</code> * reset 1
<code>\setcharstrut {...}</code> * TEXT
<code>\setcollector [...] [...²...²...] {...}</code> 1 NAME <small>OPT</small> 2 inherits: \setupcollector 3 CONTENT
<code>\setcolormodel [...]</code> * black bw gri rgb cmyk tot niciunul
<code>\setcounter [...] [...²...] [...]</code> 1 NAME <small>OPT</small> 2 NUMBER 3 NUMBER
<code>\setcounterown [...] [...²...] [...]</code> 1 NAME <small>OPT</small> 2 NUMBER 3 TEXT
<code>\setcurrentfontclass {...}</code> * NAME
<code>\setdataset [...] [...²...] [...³...]</code> 1 NAME <small>OPT</small> 2 NAME 3 KEY = VALUE
<code>\setdefaultpenalties</code>

<pre> \setdigitsmanipulation [...] * reset NUMBER </pre>
<pre> \setdirection [...] * NUMBER </pre>
<pre> \setdocumentargument {...} {...} 1 NAME 2 TEXT </pre>
<pre> \setdocumentargumentdefault {...} {...} 1 NAME 2 TEXT </pre>
<pre> \setdocumentfilename {...} {...} 1 NUMBER 2 TEXT </pre>
<pre> \setdummyparameter {...} {...} 1 KEY 2 BEFEHL </pre>
<pre> \setezaaliniat [...,*...] * [-+]mic [-+]mediu [-+]m^{TRT}are niciunul nu nu primul urmatorul da totdeauna niciodata impar par normal reset toggle DIMENSION NAME </pre>
<pre> \setezaaliniera [...,*...] * broad larg subsol inaltime linie inalt jos lohi flushright flushleft centru da nu latime normal reset intern extern flushinner flushouter stanga dreapta center dezactivat ultim end paragraf lefttoright righttoleft l2r r2l tabelul lesshyphenation morehyphenation suspendat nothanging hz fullhz nohz despsilabe nedespsilabe tolerant foartetolerant dilatat extremestretch final 1*final 2*final 3*final 4*final more 1*more 2*more </pre>
<pre> \setezaantet [...] [...,.²...] 1 text margine bord^{ura} 2 inherits: \setuplayouttext </pre>
<pre> \setezaaranjareapag [...,*...] * dezactivat oglindit douafete negativ 90 180 270 reset fundal normal 2*16 2*8 2*4 2*2 2**2 2SIDE 2TOP 2UP 2DOWN 2*4*2 2*2*4 2TOPSIDE 2*8*Z 2*6*Z 1*8 1*4 3SIDE TRYPTICHON ZFLYER-8 ZFLYER-10 ZFLYER-12 MAPFLYER-12 DOUBLEWINDOW 1*2-Conference 1*4-Conference 2*2*2 2*2*3 XY NAME </pre>

\seteazaaspect [...]¹ [...,...]² [...,...]

1 NAME OPT
2 stare = start stop normal repetat
margin = DIMENSION
bordura = DIMENSION
distantamargin = DIMENSION
distantabordura = DIMENSION
distantabordurastanga = DIMENSION
distantacoltdreapta = DIMENSION
distantamarginestanga = DIMENSION
distantamarginedreapta = DIMENSION
distantasus = DIMENSION
distantaantet = DIMENSION
distantasubsol = DIMENSION
distantajos = DIMENSION
preset = NAME
marginestanga = DIMENSION
marginedreapta = DIMENSION
bordurastanga = DIMENSION
borduradreapta = DIMENSION
antet = DIMENSION
subsol = DIMENSION
sus = DIMENSION
jos = DIMENSION
spatiuspate = DIMENSION
spatiusus = DIMENSION
setups = NAME
cutspace = DIMENSION
latime = DIMENSION centru ajustat
spatiujos = DIMENSION
linii = NUMMER
inaltime = DIMENSION centru ajustat
offsetoriz = DIMENSION
veroffset = DIMENSION
coloane = NUMMER
distantacoloane = DIMENSION
metoda = implicit normal NAME
locatie = stanga centru dreapta sus subsol ofata douafete
latimetext = DIMENSION
inaltimetext = DIMENSION
nx = NUMMER
ny = NUMMER
dx = DIMENSION
dy = DIMENSION
scala = NUMMER
sx = NUMMER
sy = NUMMER
marcaje = on dezactivat pagina gol culoare unu doi patru
grid = da nu dezactivat
textdistance = DIMENSION
alternativ = implicit normal marcaj NAME
clipoffset = DIMENSION
cropoffset = DIMENSION auto
trimoffset = DIMENSION
bleedoffset = DIMENSION
artoffset = DIMENSION

\seteazaaspect [...]

* reset NAME

\seteazabarainteractiune [...]¹ [...,...]² [...,...]

1 NAME OPT
2 alternativ = a b c d e f g
stare = start stop
comanda = CSNAME
latime = DIMENSION
inaltime = DIMENSION max broad
inaltime = DIMENSION max
distanta = DIMENSION
pas = mic mediu mare
culoarefundal = COLOR
stil = STYLE BEFEHL
culoare = COLOR
culoarecontrast = COLOR
simbol = da nu
inherits: \seteazainconjurat

`\seteazablanc [...,*...]`

* inherits: \blanc OPT

`\seteazabloc [...,1...] [...,..2...]`

1 NAME OPT
2 inainte = BEFEHL
dupa = BEFEHL
stanga = BEFEHL
dreapta = BEFEHL
alternativ = paragraf text
intern = BEFEHL
setups = NAME
aliniere = stanga dreapta centru flushleft flushright intern extern
stil = STYLE BEFEHL
culoare = COLOR

`\seteazablocsectiune [...,1...] [...,..2...]`

1 NAME OPT
2 pagina = inherits: \pagina
inainte = BEFEHL
dupa = BEFEHL
numar = da nu

`\seteazabuffer [...,1...] [...,..2...]`

1 BUFFER OPT
2 inainte = BEFEHL
dupa = BEFEHL
strip = da nu

`\seteazacamp [...,1...] [...,..2...] [...,..3...] [...,..4...] [...,..5...]`

1 NAME OPT OPT OPT OPT
2 reset eticheta incadrat orizontal vertical
3 inherits: \setupfieldtotalframed
4 inherits: \setupfieldlabelframed
5 inherits: \setupfieldcontentframed

`\seteazacampuri [...,1...] [...,..2...] [...,..3...] [...,..4...]`

1 reset eticheta incadrat^{OPT} orizontal vertical^{OPT} OPT
2 inherits: \setupfieldtotalframed
3 inherits: \setupfieldlabelframed
4 inherits: \setupfieldcontentframed

`\seteazaclipping [...,..*...]`

* stare = start stop
latime = DIMENSION
inaltime = DIMENSION
hoffset = DIMENSION
voffset = DIMENSION
x = NUMMER
y = NUMMER
nx = NUMMER
ny = NUMMER
sx = NUMMER
sy = NUMMER
offsetstanga = DIMENSION
offsetdreapta = DIMENSION
offsetsus = DIMENSION
offsetjos = DIMENSION
mp = NAME
n = NUMMER
offset = DIMENSION

`\seteazacoloane [...,.*=.,...]`

* n = NUMMER
distanta = DIMENSION
optiune = fundal
offset = DIMENSION
comanda = \...##1
inaltime = DIMENSION
directie = stanga dreapta
balanta = da nu
aliniere = setupalign
toleranta = setuptolerance
blanc = inherits: \blanc
nsus = NUMMER
rigla = on dezactivat BEFEHL

`\seteazacomentariu [...,1...] [...,.*2.,...]`

1 NAME OPT
2 stare = start stop niciunul
metoda = normal ascuns
simbol = Comment Ajutor Insert Cheie Newparagraph Note Paragraf Default
latime = ajustat DIMENSION
inaltime = ajustat DIMENSION
inaltime = ajustat DIMENSION
titlu = TEXT
subtitlu = TEXT
autor = TEXT
nx = NUMMER
ny = NUMMER
culoare = COLOR
optiune = xml max
textlayer = NAME
locatie = bordurastanga bordurad dreapta inmarginestanga marginedreapta text inalt niciunul
distanta = DIMENSION
spatiu = da
buffer = BUFFER

`\seteazacomentariupagina [...,.*=.,...]`

* locatie = stanga dreapta sus subsol niciunul
stare = start stop niciunul
offset = DIMENSION
distanta = DIMENSION
latime = DIMENSION
inaltime = DIMENSION

`\seteazaculoare [...]`

* FILE

`\seteazaculori [...,.*=.,...]`

* stare = start stop
spot = da nu
expansiune = da nu
factor = da nu
rgb = da nu
cmyk = da nu
conversie = da nu totdeauna
pagecolormodel = auto niciunul NAME
culoaretext = COLOR
intent = overprint knockout niciunul

`\seteazadimensiunihartie [...1] [...2...]`

1 NAME OPT
2 sus = BEFEHL
jos = BEFEHL
stanga = BEFEHL
dreapta = BEFEHL
metoda = normal niciunul NAME
scala = NUMMER
nx = NUMMER
ny = NUMMER
dx = DIMENSION
dy = DIMENSION
latime = DIMENSION
inaltime = DIMENSION
spatiusus = DIMENSION
spatiuspate = DIMENSION
offset = DIMENSION
pagina = reset vedere oglindit negativ rotat 90 180 270 NAME
hartie = reset vedere oglindit negativ rotat 90 180 270 NAME
optiune = ajustat max
distanta = DIMENSION

`\seteazadimensiunihartie [...1...] [...2...]`

1 reset vedere oglindit negativ rotat 90 180 270^{OPT}NAME
2 reset vedere oglindit negativ rotat 90 180 270 NAME

`\seteazaecraninteractiune [...*...]`

* latime = ajustat max tight DIMENSION
inaltime = ajustat max tight DIMENSION
spatiuspate = DIMENSION
offsetoriz = DIMENSION
veroffset = DIMENSION
spatiusus = DIMENSION
optiune = ajustat max ofata douafete semncarte auto niciunul implicit fixat vedere portrait pagina foaie attachment layer titlu
copies = NUMMER
print = LISTE
intarziere = niciunul NUMMER

`\seteazaelemente [...1...] [...2...]`

1 NAME OPT
2 alternativ = stanga dreapta sus subsol inmarginie
latimetext = DIMENSION
latime = DIMENSION
distanta = DIMENSION
simbol = niciunul NAME
aliniere = stanga centru dreapta flushleft flushright intern extern marginie
textalign = stanga centru dreapta flushleft flushright intern extern
n = NUMMER
inainte = BEFEHL
dupa = BEFEHL
intre = BEFEHL

`\seteazaenumerare [...1...] [...2...]`

1 NAME OPT
2 inherits: \setupenumeration

```

\seteazafloat [...1,...] [...2,...]
1 SINGULAR OPT
2 aliniaturmator = da nu auto
implicit = inherits: \placefloat
fallback = inherits: \placefloat
intern = BEFEHL
criteriu = DIMENSION
metoda = NUMMER
sidemethod = NUMMER
textmethod = NUMMER
sidealign = inaltime adancime linie jumatatelinie grila normal
grid = inherits: \snaptogrid
local = da nu
comanda = \...#1
availablewidth = DIMENSION
availableheight = DIMENSION
latimeminima = DIMENSION
latimemaxima = DIMENSION
locatie = stanga dreapta centru flushleft flushright center max intern extern innermargin outermargin
inneredge outeredge spatuspate cutspace marginestanga marginedreapta borduradreapta
borduradreapta
distantmarginestanga = DIMENSION
distantmarginedreapta = DIMENSION
marginestanga = DIMENSION
marginedreapta = DIMENSION
innermargin = DIMENSION
outermargin = DIMENSION
bottombefore = BEFEHL
bottomafter = BEFEHL
expansiune = da nu xml
referenceprefix = + - TEXT
xmlsetup = NAME
catcodes = NAME
freeregion = da nu
spatiuinainte = niciunul inherits: \blanc
spatiudupa = niciunul inherits: \blanc
latime = DIMENSION
inaltime = DIMENSION
offset = DIMENSION niciunul overlay
spatiulateralinainte = niciunul inherits: \blanc
spatiulateraldupa = niciunul inherits: \blanc
spacebefore = niciunul inherits: \blanc
spaceafterside = niciunul inherits: \blanc
sidethreshold = old dimension
margine = DIMENSION
nsus = DIMENSION
njos = DIMENSION
pas = mic mediu mare linie adancime
nlinii = NUMMER
cache = da nu

```

```

\seteazafloats [...1,...] [...2,...]
1 SINGULAR OPT
2 inherits: \seteazafloat

```

```

\seteazafonttext [...*,...]
* DIMENSION NAME global reset x xx mic mare script scriptscript rm ss tt hw cg roman serif regular sans sansserif
suport type teletype mono scrismannual caligrafic

```

```

\seteazaformulare [...*,...]
* metoda = XML HTML PDF
export = da nu

```

```

\seteazaformule [...1,...] [...2,...]
1 NAME OPT
2 inherits: \setupformula

```

`\seteazafundal [...1;...] [...2...]`

1 NAME OPT
2 stare = start stop
offsetstanga = DIMENSION
offsetdreapta = DIMENSION
offsetsus = DIMENSION
offsetjos = DIMENSION
inainte = BEFEHL
dupa = BEFEHL
inherits: \seteazainconjurat

`\seteazafundaluri [...1;...] [...2;...] [...3...]`

1 sus antet text subsol subsol OPT
2 bordurastanga marginestanga text marginedreapta borduradreapta
3 inherits: \seteazainconjurat

`\seteazafundaluri [...1;...] [...2...]`

1 foaie pagina paginastanga^{OPT} paginadreapta text ascuns
2 stare = start stop
inherits: \seteazainconjurat

`\seteazagrosimelinie [...]`

* mic mediu mare DIMENSION

`\seteazaimpartireafloat [...*...]`

* inainte = BEFEHL
dupa = BEFEHL
intre = BEFEHL
linii = auto NUMMER
conversie = NAME

`\seteazainconjurat [...1...] [...2...]`

```
1 NAME OPT
2 colt = rectangular rotund NUMBER
  coltframe = rectangular rotund NUMBER
  coltfundal = rectangular rotund NUMBER
  raza = DIMENSION
  razaframe = DIMENSION
  razafundal = DIMENSION
  inaltime = DIMENSION
  adancimeframe = DIMENSION
  adancimefundal = DIMENSION
  culoareframe = COLOR
  framesus = on dezactivat NAME
  framejos = on dezactivat NAME
  framestanga = on dezactivat NAME
  framedreapta = on dezactivat NAME
  region = da nu
  grosimerigla = DIMENSION
  offsetframe = DIMENSION
  frame = on dezactivat overlay niciunul
  fundal = primplan culoare NAME
  offsetfundal = incadrat DIMENSION
  component = NAME
  extras = BEFEHL
  foregroundstyle = STYLE BEFEHL
  foregroundcolor = COLOR
  setups = NAME
  offset = implicit overlay niciunul DIMENSION
  latime = local ajustat max broad fixat DIMENSION
  inaltime = ajustat max broad DIMENSION
  aliniere = inherits: \seteazaalinierea
  strut = da nu niciunul local global
  autostrut = da nu
  locatie = inaltime adancime inalt jos sus centru subsol linie lohi suspendat mentine formula matematica
  normal
  autolatime = da nu fortat
  linii = NUMBER
  sus = BEFEHL
  jos = BEFEHL
  blanc = da nu
  profile = NAME
  gol = da nu
  loffset = DIMENSION
  roffset = DIMENSION
  toffset = DIMENSION
  boffset = DIMENSION
  orientation = NUMBER
```

`\seteazaingust [...1...] [...2...]`

```
1 NAME OPT
2 stanga = DIMENSION
  mijloc = DIMENSION
  dreapta = DIMENSION
  implicit = [-+]stanga [-+]centru [-+]dreapta NUMBER*stanga NUMBER*centru NUMBER*dreapta reset
  inainte = BEFEHL
  dupa = BEFEHL
```

```

\seteazainteractiunea [...] [...]
1 NAME OPT
2 stare = start stop
  stil = STYLE BEFEHL
  culoare = COLOR
  culoarecontrast = COLOR
  titlu = TEXT
  subtitlu = COLOR
  autor = TEXT
  data = TEXT
  keyword = TEXT
  focus = standard incadrat latime latimeminima inaltime inaltimeminima ajustat tight
  meniu = on dezactivat
  fieldlayer = auto NAME
  calculeaza = REFERENCE
  click = da nu
  display = normal nou
  pagina = da nu pagina nume auto
  actiunedeschidere = REFERENCE
  actiuneinchidere = REFERENCE
  actiunedeschiderepagina = REFERENCE
  actiuneinchiderepagina = REFERENCE
  setsimbol = NAME
  inaltime = DIMENSION
  inaltime = DIMENSION
  focusoffset = DIMENSION

```

```

\seteazainteractiunea [...]
* NAME OPT

```

```

\seteazajos [...] [...]
1 text margine OPTborderura
2 inherits: \setuplayouttext

```

```

\seteazalegenda [...] [...]
1 NAME OPT
2 suffix = BEFEHL
  suffixseparator = BEFEHL
  suffixstopper = BEFEHL
  locatie = stanga dreapta centru jos inalt grila linii overlay intern extern innermargin outermargin
  marginestanga marginedreapta lefthanging righthanging suspenda sus subsol dilatat tolerant
  foartetolerant niciunul implicit

  comanda = \...##1
  comandanumar = \...##1
  comandatext = \...##1
  spatiuinainte = inherits: \blanc
  spaceinbetween = inherits: \blanc
  spatiudupa = inherits: \blanc
  distanta = DIMENSION
  stiltitlu = STYLE BEFEHL
  culoaretitlu = COLOR
  headseparator = TEXT
  intre = BEFEHL
  stil = STYLE BEFEHL
  culoare = COLOR
  offsetsus = DIMENSION
  offsetjos = DIMENSION
  numar = da nu niciunul
  group = TEXT
  marginestanga = DIMENSION
  marginedreapta = DIMENSION
  innermargin = DIMENSION
  outermargin = DIMENSION
  aliniere = inherits: \seteazaaliniera
  latime = ajustat max DIMENSION
  latimeminima = ajustat DIMENSION
  latimemaxima = DIMENSION
  inherits: \setupcounter

```

```

\seteazalegendele [...] [...]
1 NAME OPT
2 inherits: \seteazalegenda

```


`\seteazaliniesilabe [...,.*,...]`

* semn = normal larg

`\seteazaliniesubtire [...,.*,...]`

* inalttime = max DIMENSION
inaltime = max DIMENSION
fundal = culoare
frame = on dezactivat
grosimerigla = DIMENSION
alternativ = a b c niciunul
culoarefundal = COLOR
culoare = COLOR
spatiereinterliniara = mic mediu mare NUMBER
inainte = BEFEHL
dupa = BEFEHL
intre = BEFEHL
n = NUMBER

`\seteazalinii [...,1...] [...,.*2,...]`

1 NAME OPT
2 optiune = impachetat
inainte = BEFEHL
dupa = BEFEHL
intre = BEFEHL
aliniat = inherits: \seteazaaliniat
aliniere = inherits: \seteazaalinierea
spatiu = da on dezactivat fixat implicit
comanda = BEFEHL
stil = STYLE BEFEHL
culoare = COLOR
stanga = BEFEHL
dreapta = BEFEHL

`\seteazaliniimargine [...,1] [...,.*2,...]`

1 NUMBER OPT
2 inherits: \setupmarginrule

`\seteazaliniinegre [...,.*,...]`

* latime = max DIMENSION
inaltime = max DIMENSION
inaltime = max DIMENSION
distanta = DIMENSION
n = NUMBER
alternativ = a b
stil = STYLE BEFEHL
culoare = COLOR
type = mp da nu
mp = NAME

`\seteazaliniiumplere [...,.*,...]`

* inainte = BEFEHL
dupa = BEFEHL
margine = DIMENSION
latime = DIMENSION
distanta = DIMENSION
grosimerigla = DIMENSION
culoare = COLOR

\seteazalista [...¹,...] [...²,...]

```
1 LISTE
2 stare = start stop
   locatie = niciunul aici
   type = simple comanda userdata
   criteriu = local intro referinta SECTIONBLOCK:referinta tot SECTIONBLOCK:tot text SECTIONBLOCK:text
             curent SECTIONBLOCK:curent aici precedent SECTIONBLOCK:precedent componenta ABSCHNITT
             SECTIONBLOCK:ABSCHNITT
   lista = NAME
   latime = ajustat broad DIMENSION
   inaltime = ajustat broad DIMENSION
   inaltime = ajustat broad DIMENSION
   simbol = unu doi trei niciunul implicit
   eticheta = da nu niciunul NAME
   starter = BEFEHL
   stopper = BEFEHL
   comanda = \...##1##2##3
   comandanumar = \...##1
   comandatext = \...##1
   comandapagina = \...##1
   numarpagina = da nu totdeauna
   numartitlu = da nu totdeauna
   inainte = BEFEHL
   dupa = BEFEHL
   intre = BEFEHL
   margine = niciunul DIMENSION
   distanta = niciunul DIMENSION
   alinieretitlu = da nu
   numberalign = stanga dreapta centru flushleft flushright intern extern
   aliniere = inherits: \seteazaalinierea
   suspenda = da nu
   stanga = BEFEHL
   dreapta = BEFEHL
   interactiune = da nu tot numar text titlu pagina numarsetiune numarpagina
   limittext = da nu TEXT
   stil = STYLE BEFEHL
   culoare = COLOR
   stilnumar = STYLE BEFEHL
   culoarenumar = COLOR
   stiltext = STYLE BEFEHL
   culoaretext = COLOR
   stilpagina = STYLE BEFEHL
   culoarepagina = COLOR
   referinta = NUMBER
   extras = NAME
   order = comanda tot titlu
   alternativ = a b c d e f g stanga dreapta sus subsol comanda niciunul interactive paragraf orizontal
              vertical NAME
   latimemaxima = DIMENSION
   pageprefix = da nu
   pageprefixseparatorset = NAME
   pageprefixconversionset = NAME
   pageprefixset = NAME
   pageprefixsegments = NUMBER NUMBER:NUMBER NUMBER:* NUMBER:tot ABSCHNITT ABSCHNITT:ABSCHNITT ABSCHNITT:*
                       ABSCHNITT:tot
   pageprefixconnector = BEFEHL PROCESSOR->BEFEHL
   pageconversionset = NAME
   pagestarter = BEFEHL PROCESSOR->BEFEHL
   pagestopper = BEFEHL PROCESSOR->BEFEHL
   inherits: \setupcounterinherits: \seteazainconjurat
```

\seteazalistacombinata [...¹] [...²,...]

```
1 LISTE
2 criteriu = local intro referinta SECTIONBLOCK:referinta tot SECTIONBLOCK:tot text SECTIONBLOCK:text curent
            SECTIONBLOCK:curent aici precedent SECTIONBLOCK:precedent componenta ABSCHNITT SECTIONBLOCK:ABSCHNITT
   referinta = NUMBER
   extras = NAME
   order = comanda tot titlu
   alternativ = a b c d e f g stanga dreapta sus subsol comanda niciunul interactive paragraf orizontal vertical
              NAME
```

\setareCOMBINEDLIST [...^{*},...]

```
* inherits: \seteazalistacombinata
instances: content
```

\setarecontent [...^{*},...]

```
* inherits: \seteazalistacombinata
```

`\seteazamajuscule [...,1...] [...,2...,...]`

1 NAME OPT
2 titlu = da nu
sc = da nu
stil = STYLE BEFEHL

`\seteazamakeup [...,1...] [...,2...,...]`

1 NAME OPT
2 pagina = inherits: \pagina
comanda = BEFEHL
latime = DIMENSION
inaltime = DIMENSION
aliniere = inherits: \seteazaalinierea
setups = NAME
sus = BEFEHL
jos = BEFEHL
inainte = BEFEHL
dupa = BEFEHL
locatie = sus
referinta = REFERENCE
pagestate = start stop
stareantet = start stop inalt gol niciunul normal
staresubsol = start stop inalt gol niciunul normal
staresus = start stop inalt gol niciunul normal
starejos = start stop inalt gol niciunul normal
staretext = start stop inalt gol niciunul normal
douafete = da nu gol
stil = STYLE BEFEHL
culoare = COLOR

`\seteazamarcaje [...,1...] [...,2...,...]`

1 BESCHRIFTUNG OPT
2 stare = start stop
expansiune = da nu
separator = BEFEHL
filtercommand = \...##1

`\seteazamenuinteractiune [...,1...] [...,2...,...]`

1 NAME OPT
2 alternativ = vertical orizontal ascuns
category = NAME
offsetstanga = overlay incadrat niciunul implicit DIMENSION
offsetdreapta = overlay incadrat niciunul implicit DIMENSION
offsetsus = overlay incadrat niciunul implicit DIMENSION
offsetjos = overlay incadrat niciunul implicit DIMENSION
latimemaxima = DIMENSION
inaltimemaxima = DIMENSION
itemalign = stanga centru dreapta flushleft flushright jos inalt lohi
stare = start gol local
stanga = BEFEHL
dreapta = BEFEHL
distanta = overlay DIMENSION
inainte = BEFEHL
dupa = BEFEHL
intre = BEFEHL
pozitie = da nu
mijloc = BEFEHL
stil = STYLE BEFEHL
culoare = COLOR
aceeasipagina = da nu gol niciunul normal implicit
culoarecontrast = COLOR
inherits: \seteazainconjurat

`\seteazaminicitat [...,*...,...]`

* inherits: \setupdelimitedtext

`\seteazanumarpagina [...,*...,...]`

* inherits: \setupuserpagenumber

`\seteazanumarsubpagina [...,*...,...]`

* inherits: \setupcounter

`\seteazanumartitlu [..1] [..2]`

1 ABSCHNITT
2 [-+]NUMMER

`\seteazanumerotarelinii [..,1...] [..,2...]`

1 NAME OPT
2 start = NUMMER
pas = NUMMER
metoda = pagina primul urmatorul
conversie = NAME
continua = da nu
locatie = text begin end implicit stanga dreapta intern extern instanga indreapta margine inmargine
distanta = DIMENSION
alinieri = intern extern flushleft flushright stanga dreapta centru auto
comanda = \..##1
stanga = BEFEHL
dreapta = BEFEHL
margine = DIMENSION
latime = margine DIMENSION
stil = STYLE BEFEHL
culoare = COLOR

`\seteazanumerotarepagina [..,*...]`

* alternativ = ofata douafete
pagina = inherits: \pagina
strut = da nu
comanda = \..##1
stanga = BEFEHL
dreapta = BEFEHL
stare = start stop
latime = DIMENSION
locatie = antet subsol stanga centru dreapta instanga indreapta margine inmargine lamargine marginebordura
stil = STYLE BEFEHL
culoare = COLOR

`\seteazanumerotareparagrafe [..,*...]`

* stare = start stop linie reset
distanta = DIMENSION
stil = STYLE BEFEHL
culoare = COLOR

`\seteazapaleta [..]`

* NAME

`\seteazaparagrafe [..1] [..,2...] [..,3...]`

1 NAME OPT OPT
2 fiecare NUMMER
3 n = NUMMER
inainte = BEFEHL
dupa = BEFEHL
latime = DIMENSION
distanta = DIMENSION
inaltime = DIMENSION ajustat
sus = BEFEHL
jos = BEFEHL
alinieri = inherits: \seteazaalinieria
intern = BEFEHL
comanda = BEFEHL
rigla = on dezactivat
grosimerigla = DIMENSION
culoarerigla = COLOR
stil = STYLE BEFEHL
culoare = COLOR

`\seteazaparagrafe [..1.] [..,..2..,..]`

1 NAME:NUMMER OPT
2 n = NUMMER
inainte = BEFEHL
dupa = BEFEHL
latime = DIMENSION
distanta = DIMENSION
inaltime = DIMENSION ajustat
sus = BEFEHL
jos = BEFEHL
aliniere = inherits: \seteazaalinierea
intern = BEFEHL
comanda = BEFEHL
rigla = on dezactivat
grosimerigla = DIMENSION
culoarerigla = COLOR
stil = STYLE BEFEHL
culoare = COLOR

`\seteazaplasareaopozita [..,..*..,..]`

* stare = start stop
inainte = BEFEHL
dupa = BEFEHL
intre = BEFEHL

`\seteazaprograme [..,..*..,..]`

* stil = STYLE BEFEHL
culoare = COLOR

`\seteazareferinte [..,..*..,..]`

* stare = start stop
expansiune = da nu xml
autofile = da nu
export = da nu
stanga = BEFEHL
dreapta = BEFEHL
latime = DIMENSION
douafete = da nu
interactiune = eticheta text simbol tot
separator = BEFEHL
prefix = + - TEXT

\seteazaregistru [¹...] [²...,...]

```
1 NAME NAME:NUMMER OPT
2 referencemethod = avans
  expansiune      = da nu xml
  numarpropriu   = da nu
  xmlsetup        = NAME
  alternativ       = a b A B
  metoda         = implicit inainte dupa primul ultim ch mm zm pm mc zc pc uc
  compress        = da nu tot
  check          = da nu
  criteriu       = local text curent precedent tot ABSCHNITT
  pageprefixseparatorset = BEFEHL
  pageprefixconversionset = NAME
  pageprefixstarter = BEFEHL PROCESSOR->BEFEHL
  pageprefixstopper = BEFEHL PROCESSOR->BEFEHL
  pageprefixset  = NAME
  pageprefixsegments = NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tot ABSCHNITT ABSCHNITT:ABSCHNITT ABSCHNITT:*
                    ABSCHNITT:tot
  pageprefixconnector = BEFEHL
  pageprefix     = da nu
  pageseparatorset = NAME
  pageconversionset = NAME
  pagestarter    = BEFEHL PROCESSOR->BEFEHL
  pagestopper    = BEFEHL PROCESSOR->BEFEHL
  pagesegments  = NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tot
  latimemaxima  = DIMENSION
  indicator      = da nu
  inainte       = BEFEHL
  dupa          = BEFEHL
  comanda       = \...##1
  comandatext   = \...##1
  deeptextcommand = \...##1
  comandapagina = \...##1
  distanta      = DIMENSION
  interactiune  = text numarpagina
  numarpagina   = da nu
  simbol        = a n niciunul 1 2 BEFEHL
  language      = implicit DIN_5007-1 DIN_5007-2 Duden de-DE de-CH de-AT ru-iso9 ocs-scن SPRACHE
  stil          = STYLE BEFEHL
  culoare       = COLOR
  stiltext      = STYLE BEFEHL
  culoaretext   = COLOR
  stilpagina    = STYLE BEFEHL
  culoarepagina = COLOR
  pageleft      = BEFEHL
  pageright     = BEFEHL
  n             = NUMMER
  balanta       = da nu
  aliniere      = inherits: \seteazaalinierea
  numberorder   = numere
```

```

\seteazaregistru [...1,...] [...2,...] [...3,...]
1 NAME OPT OPT
2 NUMMER
3 referencemethod = avans
expansiune = da nu xml
numarpropriu = da nu
xmlsetup = NAME
alternativ = a b A B
metoda = implicit inainte dupa primul ultim ch mm zm pm mc zc pc uc
compress = da nu tot impachetat
check = da nu
criteriu = local text curent precedent tot ABSCHNITT
pageprefixseparatorset = BEFEHL
pageprefixconversionset = NAME
pageprefixstarter = BEFEHL PROCESSOR->BEFEHL
pageprefixstopper = BEFEHL PROCESSOR->BEFEHL
pageprefixset = NAME
pageprefixsegments = NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tot ABSCHNITT ABSCHNITT:ABSCHNITT ABSCHNITT:*
ABSCHNITT:tot
pageprefixconnector = BEFEHL
pageprefix = da nu
pageseparatorset = NAME
pageconversionset = NAME
pagestarter = BEFEHL PROCESSOR->BEFEHL
pagestopper = BEFEHL PROCESSOR->BEFEHL
pagesegments = NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tot
latimemaxima = DIMENSION
indicator = da nu
inainte = BEFEHL
dupa = BEFEHL
comanda = \...##1
comandatext = \...##1
deeptextcommand = \...##1
comandapagina = \...##1
distanta = DIMENSION
interactiune = text numarpagina
numarpagina = da nu
simbol = a n niciunul 1 2 BEFEHL
language = implicit DIN_5007-1 DIN_5007-2 Duden de-DE de-CH de-AT ru-iso9 ocs-scن SPRACHE
stil = STYLE BEFEHL
culoare = COLOR
stiltext = STYLE BEFEHL
culoaretext = COLOR
stilpagina = STYLE BEFEHL
culoarepagina = COLOR
pageleft = BEFEHL
pageright = BEFEHL
n = NUMMER
balanta = da nu
aliniere = inherits: \seteazaalinierea
numberorder = numere

```

```

\setareREGISTER [...1,...] [...2,...]
1 NUMMER OPT
2 inherits: \seteazaregistru
instances: index

```

```

\setareindex [...1,...] [...2,...]
1 NUMMER OPT
2 inherits: \seteazaregistru

```

```

\seteazarigletext [...*,...]
* inainte = BEFEHL
dupa = BEFEHL
intre = BEFEHL
grosimerigla = DIMENSION
locatie = stanga inmarginie
stil = STYLE BEFEHL
culoare = COLOR
culoarerigla = COLOR
latime = DIMENSION
inaltime = DIMENSION
distanta = DIMENSION
corectieadancime = on dezactivat
fonttext = inherits: \seteazafonttext

```

`\seteazarigleumplere [.,.,.*.,.,.]`

* inainte = BEFEHL
dupa = BEFEHL
n = NUMMER
spatiereinterliniara = mic mediu mare NUMMER
distanta = DIMENSION
latime = ajustat broad DIMENSION
separator = BEFEHL
stil = STYLE BEFEHL
culoare = COLOR

`\seteazarotare [.,.,.*.,.,.]`

* locatie = ajustat broad adancime inalt centru implicit normal
rotatie = stanga dreapta intern extern NUMMER
inherits: \seteazainconjurat

`\seteazasimbol [.*.]`

* NAME

`\seteazasinonime [...,1...] [...,2.,.,.]`

1 SINGULAR OPT
2 expansiune = da nu xml
alternativ = primul ultim normal NAME
urmatorul = BEFEHL
comanda = \...##1##2##3
comandatext = \...##1
synonymcommand = \...##1
language = implicit DIN₅₀₀₇₋₁ DIN₅₀₀₇₋₂ Duden de-DE de-CH de-AT ru-iso9 ocs-scن SPRACHE
metoda = implicit inainte dupa primul ultim ch mm zm pm mc zc pc uc
criteriu = curent precedent local text tot ABSCHNITT
stil = STYLE BEFEHL
culoare = COLOR
stiltext = STYLE BEFEHL
culoarettext = COLOR
stilsinonim = STYLE BEFEHL
culoaresinonim = COLOR

`\seteazasortare [...,1...] [...,2.,.,.]`

1 SINGULAR OPT
2 expansiune = da nu xml
alternativ = primul ultim normal NAME
urmatorul = BEFEHL
comanda = \...##1##2##3
comandatext = \...##1
synonymcommand = \...##1
language = implicit DIN₅₀₀₇₋₁ DIN₅₀₀₇₋₂ Duden de-DE de-CH de-AT ru-iso9 ocs-scن SPRACHE
metoda = implicit inainte dupa primul ultim ch mm zm pm mc zc pc uc
criteriu = curent precedent local text tot ABSCHNITT
stil = STYLE BEFEHL
culoare = COLOR
stiltext = STYLE BEFEHL
culoarettext = COLOR
stilsinonim = STYLE BEFEHL
culoaresinonim = COLOR

`\seteazaspatiu [.*.]`

* fixat impachetat ^{OPT} broad

`\seteazaspatialb [...,*.,.]`

* fix fixat flexibil linie^{OPT}umatatelinie quarterline niciunul mic mediu mare implicit DIMENSION

`\seteazaspatiinterliniar [...1;2...] [...2;1...]`

1 NAME OPT
2 linie = DIMENSION
inaltime = NUMMER
inaltime = NUMMER
inaltimeminima = NUMMER
mindepth = NUMMER
distanta = DIMENSION
sus = NUMMER inaltime
jos = NUMMER
dilatata = NUMMER
shrink = NUMMER

`\seteazaspatiinterliniar [...*...]`

* on dezactivat reset auto mic mediu mare NUMMER DIMENSION

`\seteazaspatiinterliniar [...*]`

* NAME

`\seteazasubsol [...1...] [...2;1...]`

1 text margine bordura
2 inherits: \setuplayouttext

`\seteazasus [...1...] [...2;1...]`

1 text margine bordura
2 inherits: \setuplayouttext

`\seteazatabele [...1;2...]`

* text = DIMENSION max
split = da nu repetat auto
frame = on dezactivat
NL = inherits: \blanc
VL = mic mediu mare niciunul NUMMER
HL = mic mediu mare niciunul NUMMER
distanta = mic mediu mare niciunul
aliniere = stanga centru dreapta
comenzi = BEFEHL
fonttext = inherits: \seteazafonttext
grosimerigla = DIMENSION
inaltime = strut NUMMER
inaltime = strut NUMMER
openup = DIMENSION

`\seteazatabulatori [...1...] [...2...] [...3;1...]`

1 NAME OPT OPT
2 NAME
3 inherits: \setuptabulation

`\seteazatext [...1...] [...2;1...]`

1 text margine bordura
2 inherits: \setuplayouttext

`\seteazatexteantet [...1...] [...2...] [...3...] [...4...] [...5...]`

1 text margine bordura OPT OPT OPT OPT OPT
2 data numarpagina BESCHRIFTUNG TEXT BEFEHL
3 data numarpagina BESCHRIFTUNG TEXT BEFEHL
4 data numarpagina BESCHRIFTUNG TEXT BEFEHL
5 data numarpagina BESCHRIFTUNG TEXT BEFEHL

`\seteazatextejos [...1...] [...2...] [...3...] [...4...] [...5...]`

1 text margine bordura OPT OPT OPT OPT OPT
2 data numarpagina BESCHRIFTUNG TEXT BEFEHL
3 data numarpagina BESCHRIFTUNG TEXT BEFEHL
4 data numarpagina BESCHRIFTUNG TEXT BEFEHL
5 data numarpagina BESCHRIFTUNG TEXT BEFEHL

`\seteazatextesubsol [...1] [...2] [...3] [...4] [...5]`

1 text margine bordura OPT OPT OPT OPT OPT
2 data numarpagina BESCHRIFTUNG TEXT BEFEHL
3 data numarpagina BESCHRIFTUNG TEXT BEFEHL
4 data numarpagina BESCHRIFTUNG TEXT BEFEHL
5 data numarpagina BESCHRIFTUNG TEXT BEFEHL

`\seteazatextesus [...1] [...2] [...3] [...4] [...5]`

1 text margine bordura OPT OPT OPT OPT OPT
2 data numarpagina BESCHRIFTUNG TEXT BEFEHL
3 data numarpagina BESCHRIFTUNG TEXT BEFEHL
4 data numarpagina BESCHRIFTUNG TEXT BEFEHL
5 data numarpagina BESCHRIFTUNG TEXT BEFEHL

`\seteazatextetext [...1] [...2] [...3] [...4] [...5]`

1 text margine bordura OPT OPT OPT OPT OPT
2 data numarpagina BESCHRIFTUNG TEXT BEFEHL
3 data numarpagina BESCHRIFTUNG TEXT BEFEHL
4 data numarpagina BESCHRIFTUNG TEXT BEFEHL
5 data numarpagina BESCHRIFTUNG TEXT BEFEHL

`\setareLABELtext [...1] [...2...]`

1 SPRACHE OPT
2 KEY = VALUE
instances: head label mathlabel taglabel unit operator prefix suffix btxlabel

`\setarebtxlabeltext [...1] [...2...]`

1 SPRACHE OPT
2 KEY = VALUE

`\setareheadtext [...1] [...2...]`

1 SPRACHE OPT
2 KEY = VALUE

`\setarelabetext [...1] [...2...]`

1 SPRACHE OPT
2 KEY = VALUE

`\setaremathlabeltext [...1] [...2...]`

1 SPRACHE OPT
2 KEY = VALUE

`\setareoperatortext [...1] [...2...]`

1 SPRACHE OPT
2 KEY = VALUE

`\setareprefixtext [...1] [...2...]`

1 SPRACHE OPT
2 KEY = VALUE

`\setaresuffixtext [...1] [...2...]`

1 SPRACHE OPT
2 KEY = VALUE

`\setaretaglabeltext [...1] [...2...]`

1 SPRACHE OPT
2 KEY = VALUE

`\setareunittext [...1] [...2...]`

1 SPRACHE OPT
2 KEY = VALUE

`\seteazatitlu [...1,...] [...2,...]`

```
1 ABSCHNITT OPT
2 frontpartlabel = NAME
  bodypartlabel = NAME
  appendixlabel = NAME
  backpartlabel = NAME
  expansiune = da nu xml
  catcodes = NAME
  sectionresetset = NAME
  sectionseparatorset = NAME
  sectionconversionset = NAME
  conversie = NAME
  sectionstarter = BEFEHL PROCESSOR->BEFEHL
  sectionstopper = BEFEHL PROCESSOR->BEFEHL
  sectionset = NAME
  sectionsegments = NUMBER NUMBER:NUMBER NUMBER:* NUMBER:tot ABSCHNITT ABSCHNITT:ABSCHNITT ABSCHNITT:*
                    ABSCHNITT:tot
  referenceprefix = + - TEXT
  stil = STYLE BEFEHL
  culoare = COLOR
  stiltext = STYLE BEFEHL
  culoaretext = COLOR
  stilnumar = STYLE BEFEHL
  culoarenumar = COLOR
  cuplare = ABSCHNITT
  numarpropriu = da nu
  beforesection = BEFEHL
  aftersection = BEFEHL
  insidesection = BEFEHL
  numarincrement = da nu lista gol
  punetitlu = da nu ascuns gol sectiune
  numar = da nu
  pagina = inherits: \pagina
  marcaje = pagina reset
  antet = start stop inalt niciunul normal gol faramarcare NAME
  text = start stop inalt niciunul normal gol faramarcare NAME
  subsol = start stop inalt niciunul normal gol faramarcare NAME
  inainte = BEFEHL
  dupa = BEFEHL
  intre = BEFEHL
  continua = da nu
  alinieretitlu = da nu obiectmobil
  spatiereinterliniara = NAME
  interactiune = lista referinta
  internalgrid = NAME
  grid = normal standard da strict tolerant sus subsol ambele broad ajustat primul ultim inalt unu
        jos niciunul linie strut box min max centru math math:linie math:jumatatelinie math:-line
        math:-halflineline NAME
  aliniere = inherits: \seteazaaliniererea
  toleranta = inherits: \seteazatoleranta
  strut = da nu
  suspenda = linie broad ajustat niciunul NUMBER
  margine = DIMENSION
  aliniaturmator = da nu auto
  alternativ = text paragraf normal margine inmargine sus centru subsol reverse textmarginal NAME
  latime = DIMENSION
  numberwidth = DIMENSION
  latimetext = DIMENSION
  distanta = DIMENSION
  textdistance = DIMENSION
  comandainainte = BEFEHL
  comandadupa = BEFEHL
  comanda = \...##1##2
  comandatext = \...##1
  deeptextcommand = \...##1
  comandanumar = \...##1
  deepnumbercommand = \...##1
  locatie = NAME
  criteriu = strict pozitiv tot
```

`\seteazatitluri [...1,...] [...2,...]`

```
1 ABSCHNITT OPT
2 inherits: \seteazatitlu
```

`\seteazatoleranta [...,*...]`

* orizontal vertical foartestrict strict tolerant foartetolerant spatiu dilatat

`\seteazatranzitiepagina [...]`

* reset auto start aleator NUMBER

`\seteazatype [...1,...] [...2.,...]`

1 NAME OPT
2 optiune = mp lua xml parsed-xml nested tex context niciunul NAME
comanda = CSNAME
stanga = BEFEHL
dreapta = BEFEHL
tab = da nu NUMBER
compact = absolut ultim tot
escape = da nu TEXT PROCESSOR->TEXT
stil = STYLE BEFEHL
culoare = COLOR
linii = da nu normal despsilabe
spatiu = on dezactivat normal fixat dilatat

`\seteazatyping [...1,...] [...2.,...]`

1 NAME OPT
2 margineimpara = DIMENSION
marginepara = DIMENSION
margine = da nu standard DIMENSION
optiune = mp lua xml parsed-xml nested tex context niciunul NAME
stil = STYLE BEFEHL
culoare = COLOR
alinie = inherits: \seteazaalinie
linii = da nu normal despsilabe
spatiu = on dezactivat normal fixat dilatat
keptogether = da nu
inainte = BEFEHL
dupa = BEFEHL
strip = da nu NUMBER
range = NUMBER NAME
tab = da nu NUMBER
escape = da nu TEXT PROCESSOR->TEXT
aliniatormator = da nu auto
continua = da nu
start = NUMBER
stop = NUMBER
pas = NUMBER
numerotare = fisier linie nu
blanc = inherits: \blanc

`\seteazaurl [...*.,...]`

* stil = STYLE BEFEHL
culoare = COLOR

`\setelementexporttag [1.] [2.] [3.]`

1 NAME OPT
2 export nature pdf
3 inline display mixed

`\setemeasure {...} {...}`

1 NAME
2 DIMENSION

`\setevalue {...} {...}`

1 NAME
2 CONTENT

`\setevariable {...} {...} {...}`

1 NAME
2 KEY
3 VALUE

`\setevariables [1.] [...2.,...]`

1 NAME
2 set = BEFEHL
reset = BEFEHL
KEY = VALUE

<pre> \setfirstline [...] * NAME OPT </pre>
<pre> \setfirstpasscharacteralign </pre>
<pre> \setflag {...} * NAME </pre>
<pre> \setfont ... * FONT </pre>
<pre> \setfontcolorsheme [...] * NAME </pre>
<pre> \setfontfeature {...} * NAME </pre>
<pre> \setfontsolution [...] * NAME </pre>
<pre> \setfontstrut </pre>
<pre> \setglobalscript [...] * hangul hanzi nihongo ethiopic thai test NAME </pre>
<pre> \setgmeasure {...} {...} 1 NAME 2 DIMENSION </pre>
<pre> \setgvalue {...} {...} 1 NAME 2 CONTENT </pre>
<pre> \setgvariable {...} {...} {...} 1 NAME 2 KEY 3 VALUE </pre>
<pre> \setgvariables [...] [..., ...², ...] 1 NAME 2 set = BEFEHL reset = BEFEHL KEY = VALUE </pre>
<pre> \sethboxregister .¹. {...} 1 CSNAME NUMBER 2 CONTENT </pre>
<pre> \sethyphenatedurlafter {...} * TEXT </pre>
<pre> \sethyphenatedurlbefore {...} * TEXT </pre>
<pre> \sethyphenatedurlnormal {...} * TEXT </pre>
<pre> \sethyphenationfeatures [..., ...[*], ...] * NAME reset OPT </pre>

<pre> \setinitial [...] [...²...] 1 NAME OPT OPT 2 inherits: \setupinitial </pre>
<pre> \setinjector [...] [...²...] [...³] 1 NAME 2 NUMBER 3 BEFEHL </pre>
<pre> \setinteraction [...] * ascuns NAME </pre>
<pre> \setinterfacecommand {...} {...²} 1 NAME 2 NAME </pre>
<pre> \setinterfaceconstant {...} {...²} 1 NAME 2 NAME </pre>
<pre> \setinterfaceelement {...} {...²} 1 NAME 2 NAME </pre>
<pre> \setinterfacemessage {...} {...²} {...³} 1 NAME 2 titlu NAME NUMBER 3 TEXT </pre>
<pre> \setinterfacevariable {...} {...²} 1 NAME 2 NAME </pre>
<pre> \setinternalrendering [...] [...²] [...³] 1 NAME 2 auto embed 3 CONTENT </pre>
<pre> \setitaliccorrection [...] * reset 1 2 </pre>
<pre> \setJSreamble {...} {...²} 1 NAME 2 CONTENT </pre>
<pre> \setlayer [...] [...²] [...³...] {...⁴} 1 NAME OPT OPT 2 stanga dreapta par impar 3 inherits: \setuplayer 4 CONTENT </pre>
<pre> \setlayerframed [...] [...²...] [...³...] {...⁴} 1 NAME OPT OPT 2 inherits: \setuplayer 3 inherits: \seteazainconjurat 4 CONTENT </pre>
<pre> \setlayerframed [...] [...²...] {...³} 1 NAME OPT 2 inherits: \setuplayerinherits: \seteazainconjurat 3 CONTENT </pre>

```

\setlayertext [1.] [2...OPT...OPT] [3...OPT...OPT] {4...}
1 NAME
2 inherits: \setuplayer
3 aliniere = inherits: \seteazaalinierea
   latime = DIMENSION
   stil = STYLE BEFEHL
   culoare = COLOR
4 TEXT

```

```

\setlinefiller [...].
* filler NAME

```

```

\setlocalhsize [...].
* [-+]DIMENSION OPT

```

```

\setlocalscript [...].
* hangul hanzi nihongo ethiopic thai test NAME

```

```

\setMPlayer [1.] [2.] [3...OPT...OPT] {4...}
1 NAME
2 NAME
3 inherits: \setuplayer
4 CONTENT

```

```

\setMPpositiongraphic {1.} {2.} {3...OPT...OPT}
1 NAME
2 NAME
3 KEY = VALUE

```

```

\setMPpositiongraphicrange {1.} {2.} {3.} {4...OPT...OPT}
1 NAME
2 NAME
3 NAME
4 KEY = VALUE

```

```

\setMPtext {1.} {2.}
1 NAME
2 TEXT

```

```

\setMPvariable [1.] [2...].
1 NAME
2 KEY = VALUE

```

```

\setMPvariables [1.] [2...OPT...OPT]
1 NAME
2 KEY = VALUE

```

```

\setmainbodyfont

```

```

\setmainparbuilder [...].
* implicit oneline basic NAME

```

```

\setmarker [1.] [2.]
1 NAME
2 NUMMER

```

```

\setmarking [1.] {2.}
1 BESCHRIFTUNG
2 TEXT

```

```

\setmathstyle {...,*...}
* display text script scriptscript cramped uncramped normal impachetat mic mare NAME

```

`\setmeasure {1.} {2.}`

- 1 NAME
- 2 DIMENSION

`\setmessagetext {1.} {2.}`

- 1 NAME
- 2 NAME NUMMER

`\setmode {*.}`

- * NAME

`\setnostrut`

`\setnote [1.] [2...;3...] {3.}`

- 1 NAME
- 2 REFERENCE
- 3 TEXT

`\setnotetext [1.] [2...;3...] {3.}`

- 1 NAME
- 2 REFERENCE
- 3 TEXT

`\setnotetext [1.] [2...;2...]`

- 1 NAME
- 2 titlu = TEXT
- semncarte = TEXT
- lista = TEXT
- referinta = REFERENCE

`\setnote [1.] [2...;2...]`

- 1 NAME
- 2 titlu = TEXT
- semncarte = TEXT
- lista = TEXT
- referinta = REFERENCE

`\setobject {1.} {2.} \3. {4.}`

- 1 NAME
- 2 NAME
- 3 CSNAME
- 4 CONTENT

`\setoldstyle`

`\setpagereference {1.} {2...;3...}`

- 1 NAME
- 2 REFERENCE

`\setpagestate [1.] [2.]`

- 1 NAME
- 2 NAME NUMMER

`\setpagestaterealpageno {1.} {2.}`

- 1 NAME
- 2 NAME NUMMER

`\setpenalties \1. {2.} {3.}`

- 1 CSNAME
- 2 NUMMER
- 3 NUMMER

`\setpercentdimen {1.} {2.}`

- 1 DIMENSION CSNAME
- 2 DIMENSION NUMBER

`\setperiodkerning [*.]`

- * reset NAME

`\setposition {*.}`

- * NAME

`\setpositionbox {1.} \2. {3.}`

- 1 NAME
- 2 CSNAME
- 3 CONTENT

`\setpositiondata {1.} {2.} {3.} {4.}`

- 1 NAME
- 2 DIMENSION
- 3 DIMENSION
- 4 DIMENSION

`\setpositiondataplus {1.} {2.} {3.} {4.} {5...}`

- 1 NAME
- 2 DIMENSION
- 3 DIMENSION
- 4 DIMENSION
- 5 TEXT

`\setpositiononly {*.}`

- * NAME

`\setpositionplus {1.} {2...3...} \3. {4.}`

- 1 NAME
- 2 TEXT
- 3 CSNAME
- 4 CONTENT

`\setpositionstrut {*.}`

- * NAME

`\setprofile [*.]`

- * niciunul fixat strict halffixed quarterfixed eightsfixed NAME

`\setrandomseed {*.}`

- * NUMBER

`\setreference [...1...] [...2...]`

- 1 REFERENCE
- 2 KEY = VALUE

`\setreferencedobject {1.} {2.} \3. {4.}`

- 1 NAME
- 2 NAME
- 3 CSNAME
- 4 CONTENT

```

\setregisterentry [...1.] [...2...2...] [...3...3...]
1 NAME
2 eticheta = NAME
keys = TEXT PROCESSOR->TEXT
entries = TEXT PROCESSOR->TEXT
keys:1 = TEXT
keys:2 = TEXT
keys:3 = TEXT
entries:1 = TEXT
entries:2 = TEXT
entries:3 = TEXT
alternativ = TEXT
3 KEY = VALUE

```

```

\setreplacement [...]
* reset NAME

```

```

\setrigidcolumnbalance ...
* CSNAME NUMBER

```

```

\setrigidcolumnhsize {...1.} {...2.} {...3.}
1 DIMENSION
2 DIMENSION
3 NUMBER

```

```

\setscript [...]
* hangul hanzi nihongo ethiopic thai test NAME

```

```

\setsecondpasscharacteralign

```

```

\setsectionblock [...1.] [...2...2...]
1 NAME
2 semncarte = TEXT

```

```

\setsimplecolumnhsize [...n...n...]
* n = NUMBER
latime = DIMENSION
distanta = DIMENSION
linii = NUMBER

```

```

\setsmallbodyfont

```

```

\setsmallcaps

```

```

\setstackbox {...1.} {...2.} {...3.}
1 NAME
2 NAME
3 CONTENT

```

```

\setstructurepageregister [...1.] [...2...2...] [...3...3...]
1 NAME
2 eticheta = NAME
keys = TEXT PROCESSOR->TEXT
entries = TEXT PROCESSOR->TEXT
keys:1 = TEXT
keys:2 = TEXT
keys:3 = TEXT
entries:1 = TEXT
entries:2 = TEXT
entries:3 = TEXT
alternativ = TEXT
3 KEY = VALUE

```

```

\setstrut

```

<code>\setsuperiors</code>
<code>\setsystemmode {...}</code> * NAME
<code>\settabular</code>
<code>\settaggedmetadata [...,*...]</code> * KEY = VALUE
<code>\settextcontent [.1.] [.2.] [.3.] [.4.] [.5.]</code> 1 sus antet text subsol subsol OPT OPT 2 text margine bordura 3 stanga centru dreapta 4 data numarpagina BESCHRIFTUNG TEXT BEFEHL 5 data numarpagina BESCHRIFTUNG TEXT BEFEHL
<code>\settightobject {...} {...} \... {...}</code> 1 NAME 2 NAME 3 CSNAME 4 CONTENT
<code>\settightreferencedobject {...} {...} \... {...}</code> 1 NAME 2 NAME 3 CSNAME 4 CONTENT
<code>\settightstrut</code>
<code>\settightunreferencedobject {...} {...} \... {...}</code> 1 NAME 2 NAME 3 CSNAME 4 CONTENT
<code>\settrialisetting</code>
<code>\setuevalue {...} {...}</code> 1 NAME 2 CONTENT
<code>\setugvalue {...} {...}</code> 1 NAME 2 CONTENT
<code>\setunreferencedobject {...} {...} \... {...}</code> 1 NAME 2 NAME 3 CSNAME 4 CONTENT
<code>\setupalternativestyles [...,*...]</code> * metoda = normal auto

\setupattachment [\dots , \dots] [\dots , \dots]

1 NAME OPT
2 titlu = TEXT
subtitlu = TEXT
autor = TEXT
fisier = FILE
nume = NAME
buffer = BUFFER
stare = start stop
metoda = normal ascuns
simbol = Graph Paperclip Pushpin Default
latime = ajustat DIMENSION
inaltime = ajustat DIMENSION
inaltime = ajustat DIMENSION
culoare = COLOR
textlayer = NAME
locatie = bordurastanga borduradreapta inmargine marginestanga marginedreapta text inalt niciunul
distanta = DIMENSION

\setupattachments [\dots , \dots] [\dots , \dots]

1 NAME OPT
2 inherits: \setupattachment

\setupbackend [\dots , \dots]

* export = da FILE
xhtml = FILE
fisier = FILE
intent = Coated FOGRA39 (ISO 12647-2:2004) GRACoL2006_Coated1v2.icc ISO Coated v2 300 ISO Coated v2 (ECI) ISOnewspaper26v4 ISOnewspaper26v4_gr ISO Uncoated ISO Uncoated Yellowish ISO Web Coated Japan Color 2001 Coated Japan Color 2002 Newspaper Japan Web Coated (Ad) SNAP 2007 SWOP2006_Coated3v2.icc SWOP2006_Coated5v2.icc Uncoated FOGRA29 (ISO 12647-2:2004) Web Coated FOGRA28 (ISO 12647-2:2004) PSR_LWC_PLUS_V2_PT PSR_LWC_STD_V2_PT PSR_SC_PLUS_V2_PT PSR_SC_STD_V2_PT PSRgravureMF
spatiu = da nu
xmpfile = FILE
format = version implicit PDF/X-1a:2001 PDF/X-1a:2003 PDF/X-3:2002 PDF/X-3:2003 PDF/X-4 PDF/X-4p PDF/X-5g PDF/X-5pg PDF/X-5n PDF/A-1a:2005 PDF/A-1b:2005 PDF/A-2a PDF/A-3a PDF/UA-1
nivel = NUMMER
optiune = totdeauna niciodata
profile = FILE

\setupbar [\dots , \dots] [\dots , \dots]

1 NAME OPT
2 culoare = COLOR
continua = da nu tot
gol = da nu
unitate = ex em pt in cm mm sp bp pc dd cc nc
order = primplan fundal
grosimerigla = DIMENSION
metoda = NUMMER
offset = NUMMER
dy = NUMMER
max = NUMMER
foregroundstyle = STYLE BEFEHL
foregroundcolor = COLOR
mp = NAME
stanga = TEXT
dreapta = TEXT

\setupbars [\dots , \dots] [\dots , \dots]

1 NAME OPT
2 inherits: \setupbar

\setupbleeding [\dots , \dots]

* latime = DIMENSION
inaltime = DIMENSION
offset = DIMENSION
hoffset = DIMENSION
voffset = DIMENSION
locatie = t b l r bl lb br rb tl lt tr rt
dilatata = da nu
pagina = da nu

`\setupbookmark [...,.*,.,.]`

* fortat = da nu
numar = da nu
numberseparatorset = NAME
numberconversionset = NAME
numberstarter = BEFEHL
numberstopper = BEFEHL
numbersegments = NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tot ABSCHNITT ABSCHNITT:ABSCHNITT ABSCHNITT:* ABSCHNITT:tot
sectionblock = da nu

`\setupbtx [1.] [...,.2.,.]`

1 NAME OPT
2 specification = implicit apa aps NAME
dataset = implicit NAME
comanda = \..##1
stanga = BEFEHL
dreapta = BEFEHL
authorconversion = normal normalshort normalinverted invertedshort short
etallimit = NUMMER
etaldisplay = NUMMER
etaloption = ultim
stopper = initials
interactiune = start stop numar text pagina tot
alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears
authornum authoryear
sorttype = normal reverse
compress = da nu
implicit = implicit NAME
stil = STYLE BEFEHL
culoare = COLOR

`\setupbtxdataset [...,1.] [...,.2.,.]`

1 NAME OPT
2 language = SPRACHE

`\setupbtxlist [1.] [...,.2.,.]`

1 NAME OPT
2 inherits: \seteazalista

`\setupbtxregister [...,1.] [...,.2.,.]`

1 NAME OPT
2 stare = start stop
dataset = NAME
field = keyword range numarpagina autor
register = NAME
metoda = once
alternativ = normalshort invertedshort
stil = STYLE BEFEHL
culoare = COLOR

`\setupbtxrendering [...,1.] [...,.2.,.]`

1 NAME OPT
2 staretext = start stop
pagestate = start stop
separator = BEFEHL
criteriu = precedent cite aici tot niciunul
filter = TEXT
specification = NAME
titlu = TEXT
inainte = BEFEHL
dupa = BEFEHL
dataset = NAME
metoda = dataset fortat local global niciunul
sorttype = short dataset lista referinta folosit implicit cite index
repete = da nu
group = NAME
numerotare = da nu num index tag short pagina

`\setupbtx [.*]`

* NAME

```

\setupbutton [...1,...] [...2,...]
1 NAME OPT
2 stare = start stop
  aceeasipagina = da nu gol niciunul normal implicit
  stil = STYLE BEFEHL
  culoare = COLOR
  culoarecontrast = COLOR
  alternativ = ascuns
  inherits: \seteazainconjurat

```

```

\setupcharacteralign [...*,...]
* latimestanga = DIMENSION
  marginedreapta = DIMENSION
  leftsample = TEXT
  rightsample = TEXT
  character = TEXT number->TEXT text->TEXT

```

```

\setupcharacterkerning [...1,...] [...2,...]
1 NAME OPT
2 factor = max NUMBER
  latime = DIMENSION
  features = NAME
  stil = STYLE BEFEHL
  culoare = COLOR

```

```

\setupcharacterspacing [...1] [...2] [...3,...]
1 NAME OPT
2 NUMBER
3 stanga = NUMBER
  dreapta = NUMBER
  alternativ = 0 1

```

```

\setupchemical [...1,...] [...2,...]
1 NAME OPT
2 strut = da nu auto cap ajustat linie implicit CHARACTER
  latime = ajustat niciunul NUMBER
  inaltime = ajustat niciunul NUMBER
  stanga = ajustat niciunul NUMBER
  dreapta = ajustat niciunul NUMBER
  sus = ajustat niciunul NUMBER
  jos = ajustat niciunul NUMBER
  scala = mic mediu mare normal NUMBER
  rotatie = NUMBER
  symaliniere = auto
  axa = on dezactivat
  culoareframe = COLOR
  grosimerigla = DIMENSION
  offset = DIMENSION
  unitate = DIMENSION
  factor = NUMBER
  frame = on dezactivat
  culoarerigla = COLOR
  fonttext = inherits: \seteazafonttext
  dimensiune = mic mediu mare
  stil = STYLE BEFEHL
  culoare = COLOR

```

```

\setupchemicalframed [...1,...] [...2,...]
1 NAME OPT
2 inherits: \seteazainconjurat

```

```

\setupcollector [...1,...] [...2,...]
1 NAME OPT
2 rotatie = stanga dreapta intern extern NUMBER
  colt = stanga centru dreapta sus subsol
  x = DIMENSION
  y = DIMENSION
  hoffset = DIMENSION
  voffset = DIMENSION
  locatie = stanga centru dreapta sus subsol linie l c r m t b g
  stare = start stop

```

`\setupcolumnset [...1,...] [...2,...,...]`

1 NAME OPT
2 n = NUMMER
nstanga = NUMMER
ndreapta = NUMMER
latime = DIMENSION auto
distanta = DIMENSION
linii = NUMMER
latimemaxima = DIMENSION
inaltimemaxima = DIMENSION
directie = normal reverse
pagina = inherits: \pagina
inherits: \seteazainconjurat

`\setupcolumnsetarea [...1,...] [...2,...,...]`

1 NAME OPT
2 stare = start stop repetat
x = NUMMER
y = NUMMER
nx = NUMMER
ny = NUMMER
stil = STYLE BEFEHL
culoare = COLOR
clipoffset = DIMENSION
offsetdreapta = DIMENSION
inherits: \seteazainconjurat

`\setupcolumnsetareatext [...1] [...2]`

1 NAME
2 TEXT

`\setupcolumnsetlines [...1] [...2] [...3] [...4]`

1 NAME
2 NUMMER
3 NUMMER
4 NUMMER

`\setupcolumnsetspan [...1,...] [...2,...,...]`

1 NAME OPT
2 n = NUMMER
stil = STYLE BEFEHL
culoare = COLOR
inainte = BEFEHL
dupa = BEFEHL
inherits: \seteazainconjurat

`\setupcolumnsetstart [...1] [...2] [...3] [...4]`

1 NAME
2 NUMMER
3 NUMMER
4 NUMMER

`\setupcolumnspan [...*,...,...]`

* n = NUMMER
inherits: \seteazainconjurat

`\setupcombination [...1,...] [...2,...,...]`

1 NAME OPT
2 nx = NUMMER
ny = NUMMER
latime = ajustat DIMENSION
inaltime = ajustat DIMENSION
locatie = stanga centru dreapta sus subsol
distanta = DIMENSION
alternativ = eticheta text
alinie = inherits: \seteazaalinie
continua = da nu
inainte = BEFEHL
dupa = BEFEHL
intre = BEFEHL
stil = STYLE BEFEHL
culoare = COLOR

`\setupcounter [...,1...] [...,2...,...]`

1 NAME OPT
2 start = NUMBER
counter = NAME
metoda = pagina
stare = start stop
mod = bypagina byblock bytext byantet byABSCHNITT
prefix = da nu
prefixseparatorset = NAME
prefixconversion = NAME
prefixconversionset = NAME
prefixstarter = BEFEHL PROCESSOR->BEFEHL
prefixstopper = BEFEHL PROCESSOR->BEFEHL
prefixset = NAME
prefixsegments = NUMBER NUMBER:NUMBER NUMBER:* NUMBER:tot ABSCHNITT ABSCHNITT:ABSCHNITT ABSCHNITT:* ABSCHNITT:tot
numberorder = reverse
numberseparatorset = NAME
numberconversion = NAME
numberconversionset = NAME
numberstarter = BEFEHL PROCESSOR->BEFEHL
numberstopper = BEFEHL PROCESSOR->BEFEHL
numbersegments = NUMBER NUMBER:NUMBER NUMBER:* NUMBER:tot
type = primul precedent urmatorul ultim numar
criteriu = strict pozitiv tot
prefixconnector = BEFEHL PROCESSOR->BEFEHL

`\setupdataset [...,1...] [...,2...,...]`

1 NAME OPT
2 intarziere = da nu

`\setupdelimitedtext [...,1...] [...,2...,...]`

1 NAME OPT
2 inainte = BEFEHL
dupa = BEFEHL
language = local global SPRACHE
metoda = font
repete = da nu
locatie = text paragraf margine
stanga = BEFEHL
mijloc = BEFEHL
dreapta = BEFEHL
nextleft = BEFEHL
nextright = BEFEHL
spatiuinainte = inherits: \blanc
spatiudupa = inherits: \blanc
marginestanga = da nu standard DIMENSION
marginedreapta = da nu standard DIMENSION
aliniat = inherits: \seteazaaliniat
aliniaturmator = da nu auto
stil = STYLE BEFEHL
culoare = COLOR
stilsimbol = STYLE BEFEHL
culoaresimbol = COLOR

`\setupdescription` [\dots , \dots] [\dots , \dots , \dots , \dots]

1 NAME OPT
2 titlu = da nu
nivel = NUMMER
text = TEXT
headcommand = \...##1
inainte = BEFEHL
dupa = BEFEHL
intre = BEFEHL
alternativ = stanga dreapta inmargin instanga indreapta margine marginestanga marginedreapta innermargin
outermargin serried suspendat sus gol comanda NAME
aliniera = inherits: \seteazaaliniera
headalign = inherits: \seteazaaliniera
aliniat = inherits: \seteazaaliniat
display = da nu
aliniaturmator = da nu auto
ltime = ajustat broad linie DIMENSION
distanta = niciunul DIMENSION
dilatata = NUMMER
shrink = NUMMER
suspenda = ajustat broad niciunul margine NUMMER
closesymbol = BEFEHL
closecommand = \...##1
expansiune = da nu xml
referenceprefix = + - TEXT
exemplu = TEXT
margine = da nu standard DIMENSION
stil = STYLE BEFEHL
culoare = COLOR
stiltitlu = STYLE BEFEHL
culoaretitlu = COLOR
alinieretitlu = da nu

`\setupdirections` [\dots , \dots , \dots , \dots]

* bidi = on dezactivat local global
metoda = unu doi implicit
fences = da nu
break = ambele inainte

`\setupdocument` [\dots , \dots , \dots , \dots]

* inainte = BEFEHL
dupa = BEFEHL
metadata:author = TEXT
metadata:title = TEXT
metadata:subject = TEXT
metadata:keywords = TEXT
KEY = VALUE

`\setupeffect` [\dots , \dots] [\dots , \dots , \dots , \dots]

1 NAME OPT
2 metoda = niciunul comanda
dilatata = NUMMER
grosimerigla = DIMENSION
alternativ = normal intern extern ambele ascuns dilatata

`\setupenumeration [.,.,.1...] [.,.,.2...,...]`

```
1 NAME OPT
2 titlu = da nu
  numar = da nu
  comandanumar = \...##1
  distantatitlu = DIMENSION
  stiltitlu = STYLE BEFEHL
  culoaretitlu = COLOR
  titlecommand = \...##1
  titleleft = BEFEHL
  titleright = BEFEHL
  stanga = BEFEHL
  dreapta = BEFEHL
  simbol = BEFEHL
  starter = BEFEHL
  stopper = BEFEHL
  cuplare = NAME
  counter = NAME
  nivel = NUMMER
  text = TEXT
  headcommand = \...##1
  inainte = BEFEHL
  dupa = BEFEHL
  intre = BEFEHL
  alternativ = stanga dreapta inmarginestanga indreapta margine marginestanga marginedreapta innermargin
              outermargin serried suspendat sus gol comanda NAME

  aliniere = inherits: \seteazaalinierea
  headalign = inherits: \seteazaalinierea
  aliniat = inherits: \seteazaaliniat
  display = da nu
  aliniaturmator = da nu auto
  latime = ajustat broad linie DIMENSION
  distanta = niciunul DIMENSION
  dilatata = NUMMER
  shrink = NUMMER
  suspenda = ajustat broad niciunul margine NUMMER
  closesymbol = BEFEHL
  closecommand = \...##1
  expansiune = da nu xml
  referenceprefix = + - TEXT
  exemplu = TEXT
  margine = da nu standard DIMENSION
  stil = STYLE BEFEHL
  culoare = COLOR
  stiltitlu = STYLE BEFEHL
  culoaretitlu = COLOR
  alinieretitlu = da nu
  inherits: \setupcounter
```

`\setupenv [.,.,.*...,...]`

```
* set = BEFEHL
  reset = BEFEHL
  KEY = VALUE
```

`\setupexport [.,.,.*...,...]`

```
* aliniere = flushleft centru flushright normal
  fonttext = DIMENSION
  latime = DIMENSION
  titlu = TEXT
  subtitlu = TEXT
  autor = TEXT
  alternativ = html div
  properties = da nu
  hyphen = da nu
  cssfile = FILE
  primapagina = FILE
  ultimapagina = FILE
```

```
\setupexternalfigure [...1,...] [...2,...]
```

```
1 NAME OPT
2 latime = DIMENSION
  inaltime = DIMENSION
  eticheta = NAME
  pagina = NUMMER
  obiect = da nu
  prefix = TEXT
  metoda = pdf mps jpg png jp2 jbig svg eps gif tif mov buffer tex cld auto
  controale = da nu
  previzualizare = da nu
  mask = niciunul
  rezolutie = NUMMER
  culoare = COLOR
  arguments = TEXT
  repeta = da nu
  factor = ajustat broad max auto implicit
  hfactor = ajustat broad max auto implicit
  factorw = ajustat broad max auto implicit
  latimemaxima = DIMENSION
  inaltime maxima = DIMENSION
  equalwidth = DIMENSION
  equalheight = DIMENSION
  scala = NUMMER
  xscala = NUMMER
  yscala = NUMMER
  s = NUMMER
  sx = NUMMER
  sy = NUMMER
  linii = NUMMER
  locatie = local global implicit
  director = PATH
  optiune = test incadrat gol
  foregroundcolor = COLOR
  reset = da nu
  fundal = culoare primplan NAME
  frame = on dezactivat
  culoarefundal = COLOR
  xmax = NUMMER
  ymax = NUMMER
  frames = on dezactivat
  interactiune = da tot niciunul referinta layer semncarte
  fonttext = DIMENSION
  comment = BEFEHL TEXT
  dimensiune = niciunul media crop trim art
  cache = PATH
  resources = PATH
  display = FILE
  conversie = TEXT
  order = LISTE
  crossreference = da nu NUMMER
  transform = auto NUMMER
  userpassword = TEXT
  ownerpassword = TEXT
```

```
\setupexternalsoundtracks [...*,...]
```

```
* optiune = repetat
```

```
\setupfacingfloat [...1,...] [...2,...]
```

```
1 NAME OPT
2 intre = BEFEHL
  pagina = inherits: \pagina
  spaceinbetween = inherits: \blanc
  stil = STYLE BEFEHL
  culoare = COLOR
  inherits: \seteazainconjurat
```

```
\setupfieldbody [...1,...] [...2,...]
```

```
1 NAME OPT
2 category = NAME
  inherits: \setupfieldcategory
```

`\setupfieldcategory [...1,...] [...2,...]`

1 NAME OPT
2 start = NUMMER
stil = STYLE BEFEHL
culoare = COLOR
type = radio sub text linie push check signature
values = TEXT
implicit = TEXT
culoareframecamp = COLOR
culoarefundalcamp = COLOR
latime = DIMENSION
inaltime = DIMENSION
inaltime = DIMENSION
inaltime = DIMENSION
aliniere = stanga centru dreapta flushleft center flushright
n = NUMMER
simbol = NAME
fieldlayer = NAME
optiune = readonly obligatoriu protejat sortat nedisponibil nocheck fixat fisier ascuns tiparibil auto
clickintru = REFERENCE
clickies = REFERENCE
regiuneintrare = REFERENCE
regiuneiesire = REFERENCE
dupatasta = REFERENCE
format = REFERENCE
verifica = REFERENCE
calculeaza = REFERENCE
focusin = REFERENCE
focusout = REFERENCE
openpage = REFERENCE
closepage = REFERENCE

`\setupfieldcontentframed [...1,...] [...2,...]`

1 NAME OPT
2 inherits: \seteazainconjuratinherits: \setupfieldcategory

`\setupfieldlabelframed [...1,...] [...2,...]`

1 NAME OPT
2 inherits: \seteazainconjurat

`\setupfieldtotalframed [...1,...] [...2,...]`

1 NAME OPT
2 inainte = BEFEHL
dupa = BEFEHL
intre = BEFEHL
distanta = DIMENSION
alternativ = reset eticheta incadrat orizontal vertical
inherits: \seteazainconjurat

`\setupfiller [...1,...] [...2,...]`

1 NAME OPT
2 marginestanga = DIMENSION
marginedreapta = DIMENSION
stanga = BEFEHL
dreapta = BEFEHL
alternativ = simbol dilatat rigla spatii
metoda = local global centru broad
latime = DIMENSION
inaltime = DIMENSION
inaltime = DIMENSION
offset = DIMENSION
distanta = DIMENSION
aliniere = stanga dreapta centru flushleft flushright intern extern
simbol = BEFEHL
stil = STYLE BEFEHL
culoare = COLOR

`\setupfirstline [...1,...] [...2,...]`

1 NAME OPT
2 n = NUMMER
alternativ = implicit linie cuvant
stil = STYLE BEFEHL
culoare = COLOR

`\setupfittingpage [...1,...] [...2,...]`

1 NAME OPT
2 pagestate = start stop
comanda = \...##1
margine = pagina
scala = NUMMER
hartie = auto implicit NAME
inherits: \seteazainconjurat

`\setupfontexpansion [...1,...] [...2,...]`

1 NAME
2 vector = NAME
factor = NUMMER
dilatat = NUMMER
shrink = NUMMER
pas = NUMMER

`\setupfontprotrusion [...1,...] [...2,...]`

1 NAME
2 vector = NAME
factor = NUMMER
stanga = NUMMER
dreapta = NUMMER

`\setupfonts [...*,...]`

* language = nu auto

`\setupfontsolution [...1,...] [...2,...]`

1 NAME OPT
2 goodies = FILE
solution = NAME
less = NAME
more = NAME
metoda = preroll split normal reverse aleator
criteriu = NUMMER

`\setupformula [...1,...] [...2,...]`

1 NAME OPT
2 locatie = stanga dreapta
aliniere = stanga centru dreapta flushleft center flushright normal
split = da nu pagina
strut = da nu
distanta = DIMENSION
stanga = BEFEHL
dreapta = BEFEHL
spatiuinainte = inherits: \blanc
spatiudupa = inherits: \blanc
comandanumar = \...##1
culoare = COLOR
stilnumar = STYLE BEFEHL
culoarenumar = COLOR
optiune = impachetat tight centru incadrat adancime linie jumatatelinie -linie -jumatatelinie inherits: \seteazafonttext
margine = da nu standard DIMENSION
marginestanga = DIMENSION
marginedreapta = DIMENSION
alternativ = NAME
aliniaturmator = da nu auto
grid = inherits: \snaptogrid
frame = numar
suspenda = niciunul auto
expansiune = da nu xml
referenceprefix = + - TEXT
xmlsetup = NAME
catcodes = NAME
inherits: \setupcounter

`\setupformulaframed [...1,...] [...2,...]`

1 NAME OPT
2 inherits: \seteazainconjurat

\setupframedcontent [¹...][²...]

1 NAME OPT
2 stanga = BEFEHL
dreapta = BEFEHL
leftoffser = DIMENSION
offsetdreapta = DIMENSION
offsetsus = DIMENSION
offsetjos = DIMENSION
corectielinie = da nu
inherits: \seteazainconjurat

\setupframedtable [¹...][²...]

1 NAME OPT
2 inainte = BEFEHL
dupa = BEFEHL
intre = BEFEHL
distanta = DIMENSION
inherits: \seteazainconjurat

\setupframedtablecolumn [¹...][²...][³...]

1 NAME OPT
2 NUMMER ficcare
3 inherits: \seteazainconjurat

\setupframedtablerow [¹...][²...][³...]

1 NAME OPT
2 NUMMER ficcare
3 inherits: \seteazainconjurat

\setupframedtext [¹...][²...]

1 NAME OPT
2 stanga = BEFEHL
dreapta = BEFEHL
intern = BEFEHL
locatie = stanga dreapta centru niciunul
corectieadancime = on dezactivat
fonttext = inherits: \seteazafonttext
aliniat = inherits: \seteazaaliniat
stil = STYLE BEFEHL
culoare = COLOR
inherits: \seteazainconjuratinherits: \setupplacement

\setupglobalreferenceprefix [...]

* + - TEXT

\setupheadalternative [¹...][²...]

1 NAME OPT
2 alternativ = orizontal vertical undeva
renderingsetup = NAME

\setuphelp [¹...][²...]

1 NAME OPT
2 inherits: \seteazainconjurat

\setuphigh [¹...][²...]

1 NAME OPT
2 distanta = DIMENSION
up = DIMENSION
stil = STYLE BEFEHL
culoare = COLOR

\setuphighlight [¹...][²...]

1 NAME OPT
2 comanda = da nu
stil = STYLE BEFEHL
culoare = COLOR

`\setuphyphenation [...,.*...]`

* metoda = original tex implicit hyphenate expanded traditional niciunul

`\setupindentedtext [...,1...] [...,.*2...]`

1 NAME OPT
2 inainte = BEFEHL
dupa = BEFEHL
distanta = DIMENSION
exemplu = TEXT
text = TEXT
latime = ajustat broad DIMENSION
separator = BEFEHL
stil = STYLE BEFEHL
culoare = COLOR
stiltitlu = STYLE BEFEHL
culoaretitlu = COLOR

`\setupinitial [...,1...] [...,.*2...]`

1 NAME OPT
2 n = NUMMER
m = NUMMER
inainte = BEFEHL
distanta = DIMENSION
hoffset = DIMENSION
voffset = linie DIMENSION
stil = STYLE BEFEHL
culoare = COLOR
font = FONT
text = TEXT
locatie = margine text
metoda = primul ultim auto niciunul

`\setupinsertion [...,1...] [...,.*2...]`

1 NAME OPT
2 locatie = pagina text coloane firstcolumn lastcolumn

`\setupitaliccorrection [...,*...]`

* text totdeauna global niciunul

```

\setupitemgroup [...1] [...2,...] [...3,...] [...4,...=...,...]
1 NAME OPT OPT OPT
2 fiecare NUMBER
3 intro aleator continuu impachetat autointro broad text inainte dupa faraalb margine inmargine lamargine intext
larg ajustat nofit paragraf unit serried stopper nostopper despachetat repetat norepeat reverse coloane unu doi
trei patru cinci six seven eight nine standard NUMMER*broad NUMMER*serried orizontal NAME
4 inainte = BEFEHL
dupa = BEFEHL
intre = BEFEHL
inaintetitlu = BEFEHL
dupatitlu = BEFEHL
textstanga = BEFEHL
textdreapta = BEFEHL
stanga = BEFEHL
dreapta = BEFEHL
factor = NUMMER
pas = DIMENSION
latime = DIMENSION
distanta = DIMENSION
margine = da nu standard DIMENSION
marginestanga = da nu standard DIMENSION
marginedreapta = da nu standard DIMENSION
aliniere = inherits: \seteazaalinierea
aliniat = inherits: \seteazaaliniat
start = NUMMER
symaliniere = stanga centru dreapta flushleft center flushright
simbol = NAME
n = NUMMER
aliniaturmator = da nu auto
intern = BEFEHL
comanda = CSNAME
elemente = NUMMER
latimemaxima = DIMENSION
itemalign = stanga dreapta centru flushleft flushright intern extern
alignsymbol = da nu
textdistance = mic mediu mare niciunul spatii DIMENSION
punestopper = da nu
stil = STYLE BEFEHL
culoare = COLOR
stilititlu = STYLE BEFEHL
culoaretitlu = COLOR
stilmarcaj = STYLE BEFEHL
culoaremarcaj = COLOR
stilsimbol = STYLE BEFEHL
culoaresimbol = COLOR
grid = inherits: \definegridsnapping
inherits: \setupcounter

```


`\setupitemgroup [...1,...] [...2,...]`

```
1 NAME NAME:NUMBER OPT
2 inainte = BEFEHL
  dupa = BEFEHL
  intre = BEFEHL
  inaintetitlu = BEFEHL
  dupatitlu = BEFEHL
  textstanga = BEFEHL
  textdreapta = BEFEHL
  stanga = BEFEHL
  dreapta = BEFEHL
  factor = NUMBER
  pas = DIMENSION
  latime = DIMENSION
  distanta = DIMENSION
  optiune = intro aleator continuu impachetat autointro broad text inainte dupa faraalb margine inmarginelamargine intext larg ajustat nofit paragraf unit serried stopper despachetat repetat norepeat reverse coloane unu doi trei patru cincii six seven eight nine standard NUMBER*broad NUMBER*serried orizontal NAME
  margine = da nu standard DIMENSION
  marginestanga = da nu standard DIMENSION
  marginedreapta = da nu standard DIMENSION
  aliniere = inherits: \seteazaalinierea
  aliniat = inherits: \seteazaaliniat
  start = NUMBER
  symaliniere = stanga centru dreapta flushleft center flushright
  simbol = NAME
  n = NUMBER
  aliniaturmator = da nu auto
  intern = BEFEHL
  comanda = CSNAME
  elemente = NUMBER
  latimemaxima = DIMENSION
  itemalign = stanga dreapta centru flushleft flushright intern extern
  alignsymbol = da nu
  textdistance = mic mediu mare niciunul spatiu DIMENSION
  punestopper = da nu
  stil = STYLE BEFEHL
  culoare = COLOR
  stiltitlu = STYLE BEFEHL
  culoaretitlu = COLOR
  stilmarcaj = STYLE BEFEHL
  culoaremarcaj = COLOR
  stilsimbol = STYLE BEFEHL
  culoaresimbol = COLOR
  grid = inherits: \definegridsnapping
  inherits: \setupcounter
```

`\setareITEMGROUP [...1,...] [...2,...] [...3,...]`

```
1 fiecare NUMBER OPT OPT OPT
2 inherits: \setupitemgroup
3 inherits: \setupitemgroup
instances: itemize
```

`\setareitemize [...1,...] [...2,...] [...3,...]`

```
1 fiecare NUMBER OPT OPT OPT
2 inherits: \setupitemgroup
3 inherits: \setupitemgroup
```

`\setuplabel [...1,...] [...2,...]`

```
1 NAME OPT
2 titlu = da nu
  numar = da nu
  comandanumar = \...##1
  distantatitlu = DIMENSION
  stiltitlu = STYLE BEFEHL
  culoaretitlu = COLOR
  titlecommand = \...##1
  titleleft = BEFEHL
  titleright = BEFEHL
  stanga = BEFEHL
  dreapta = BEFEHL
  simbol = BEFEHL
  starter = BEFEHL
  stopper = BEFEHL
  cuplare = NAME
  counter = NAME
  nivel = NUMMER
  text = TEXT
  headcommand = \...##1
  inainte = BEFEHL
  dupa = BEFEHL
  intre = BEFEHL
  alternativ = stanga dreapta inmargin instanga indreapta margine marginestanga marginedreapta innermargin
              outermargin serried suspendat sus gol comanda intext NAME

  aliniere = inherits: \seteazaalinierea
  headalign = inherits: \seteazaalinierea
  aliniat = inherits: \seteazaaliniat
  display = da nu
  aliniaturmator = da nu auto
  latime = ajustat broad linie DIMENSION
  distanta = niciunul DIMENSION
  dilatata = NUMMER
  shrink = NUMMER
  suspenda = ajustat broad niciunul margine NUMMER
  closesymbol = BEFEHL
  closecommand = \...##1
  expansiune = da nu xml
  referenceprefix = + - TEXT
  exemplu = TEXT
  margine = da nu standard DIMENSION
  stil = STYLE BEFEHL
  culoare = COLOR
  stiltitlu = STYLE BEFEHL
  culoaretitlu = COLOR
  alinieretitlu = da nu
  inherits: \setupcounter
```

`\setuplayer [...1,...] [...2,...]`

```
1 NAME OPT
2 stare = start stop continuu urmatorul repetat
  optiune = test
  pagina = NUMMER
  latime = DIMENSION
  inaltime = DIMENSION
  region = NAME
  rotatie = stanga dreapta intern extern NUMMER
  pozitie = da nu overlay
  hoffset = max DIMENSION
  voffset = max DIMENSION
  offset = DIMENSION
  dx = DIMENSION
  dy = DIMENSION
  sx = NUMMER
  sy = NUMMER
  x = DIMENSION
  y = DIMENSION
  colt = stanga centru dreapta sus subsol
  locatie = grila stanga centru dreapta sus subsol linie l c r m t b g
  linie = NUMMER
  coloana = NUMMER
  directie = normal reverse
  douafete = da nu
  metoda = ajustat overlay
  repeta = da
  preset = lefttop righttop leftbottom rightbottom centru middletop middlebottom middleleft middleright lefttoleft
              lefttopright NAME
```

`\setuplayeredtext [...1,...] [...2,...]`

```
1 NAME OPT
2 stil = STYLE BEFEHL
  culoare = COLOR
  inherits: \seteazainconjurat
```

`\setuplayouttext [...1.] [...2.] [...3,...]`

```
1 sus antet text subso1 subso1OPT
2 text margine bordura
3 stare = start stop gol inalt niciunul normal faramarcare NAME
  stil = STYLE BEFEHL
  culoare = COLOR
  strut = da nu
  n = NUMMER
  inainte = BEFEHL
  dupa = BEFEHL
  stilstanga = STYLE BEFEHL
  stildreapta = STYLE BEFEHL
  culoarestanga = COLOR
  culoaredreapta = COLOR
  latime = DIMENSION
  latimestanga = DIMENSION
  marginedreapta = DIMENSION
```

`\setuplinefiller [...1,...] [...2,...]`

```
1 NAME OPT
2 locatie = stanga dreapta ambele
  scop = stanga dreapta local
  mp = NAME
  inaltime = DIMENSION
  inaltime = DIMENSION
  distanta = DIMENSION
  threshold = DIMENSION
  grosimerigla = DIMENSION
  inainte = BEFEHL
  dupa = BEFEHL
  culoare = COLOR
  stiltext = STYLE BEFEHL
  culoaretext = COLOR
  aliniere = inherits: \seteazaalinierea
```

`\setuplinefillers [...1,...] [...2,...]`

```
1 NAME OPT
2 inherits: \setuplinefiller
```

`\setuplinenote [...1,...] [...2,...]`

```
1 NAME OPT
2 compress = da nu
  compressmethod = separator stopper spatiu
  compressseparator = BEFEHL
  compressdistance = DIMENSION
  inherits: \setupnote
```

`\setuplinetable [...1] [...2] [...,3...]`

1 r c OPT OPT
2 impar par antet NUMBER
3 linii = ajustat NUMBER
inainte = BEFEHL
dupa = BEFEHL
intre = BEFEHL
dilatat = da nu DIMENSION
latimetaxima = ajustat DIMENSION
nstanga = NUMBER
n = NUMBER
repetat = da nu
nx = NUMBER
latime = DIMENSION
inaltime = ajustat linie DIMENSION
distanta = DIMENSION
offsetstanga = DIMENSION
offsetdreapta = DIMENSION
aliniera = inherits: \seteazaaliniera
fundal = culoare
culoarefundal = COLOR
xheight = max DIMENSION
xdepth = max DIMENSION
stil = STYLE BEFEHL
culoare = COLOR

`\setuplistalternative [...1,...] [...,2...]`

1 NAME OPT
2 inainte = BEFEHL
dupa = BEFEHL
comanda = \...#1#2#3
renderingsetup = NAME
latime = DIMENSION
distanta = DIMENSION
dilatat = DIMENSION
filler = BEFEHL

`\setuplistextra [...1,...] [...,2...]`

1 NAME OPT
2 inainte = BEFEHL
dupa = BEFEHL

`\setuplocalfloats [...,*...]`

* inainte = BEFEHL
dupa = BEFEHL
intre = BEFEHL

`\setuplocalinterlinespace [...1,...] [...,2...]`

1 NAME OPT
2 inherits: \seteazaspasiuinterliniar

`\setuplocalinterlinespace [...,*...]`

* on dezactivat reset auto mic mediu mare OPT NUMBER DIMENSION

`\setuplocalinterlinespace [...*]`

* NAME

`\setuplow [...1,...] [...,2...]`

1 NAME OPT
2 distanta = DIMENSION
down = DIMENSION
stil = STYLE BEFEHL
culoare = COLOR

`\setuplowhigh [...1,...] [...2,...]`

1 NAME OPT
2 distanta = DIMENSION
up = DIMENSION
down = DIMENSION
stil = STYLE BEFEHL
culoare = COLOR

`\setuplowmidhigh [...1,...] [...2,...]`

1 NAME OPT
2 up = DIMENSION
down = DIMENSION
stil = STYLE BEFEHL
culoare = COLOR

`\setupMPgraphics [...*,...]`

* culoare = local global
mpy = FILE

`\setupMPinstance [...1,...] [...2,...]`

1 NAME OPT
2 format = metafun mpost
initializations = da nu
setups = NAME
stiltext = STYLE BEFEHL
culoaretext = COLOR
extensions = da nu
metoda = binary decimal double scaled implicit

`\setupMPpage [...*,...]`

* inherits: \setupfittingpage

`\setupMPvariables [...1] [...2,...]`

1 NAME OPT
2 KEY = VALUE

`\setupmarginblock [...1,...] [...2,...]`

1 NAME OPT
2 stare = start stop
latime = DIMENSION
inainte = BEFEHL
dupa = BEFEHL
intre = BEFEHL
aliniere = inherits: \seteazaalinierea
stil = STYLE BEFEHL
culoare = COLOR
sus = BEFEHL
jos = BEFEHL
locatie = stanga dreapta centru inmarginie
stanga = BEFEHL
dreapta = BEFEHL

```

\setupmargindata [...1,...] [...2,...]
1 NAME OPT
2 strut = da nu auto cap ajustat linie implicit CHARACTER
   comanda = \...#1
   latime = DIMENSION
   aliniere = inherits: \seteazaalinierea
   anchor = region text
   locatie = stanga dreapta intern extern
   metoda = sus linie primul adancime inaltime
   category = implicit bordura
   scop = local global
   optiune = text paragraf
   margine = local normal margine bordura
   distanta = DIMENSION
   hoffset = DIMENSION
   voffset = DIMENSION
   dy = DIMENSION
   spatiuos = DIMENSION
   threshold = DIMENSION
   linie = NUMMER
   stack = da continuu
   stil = STYLE BEFEHL
   culoare = COLOR

```

```

\setupmarginframed [...1,...] [...2,...]
1 NAME OPT
2 inherits: \seteazainconjurat

```

```

\setupmarginrule [...1,...] [...2,...]
1 NUMMER OPT
2 inherits: \setupsidebar

```

```

\setupmathalignment [...1,...] [...2,...]
1 NAME OPT
2 n = NUMMER
   m = NUMMER
   distanta = DIMENSION
   numar = auto
   separator = TEXT
   aliniere = stanga centru dreapta normal
   locatie = sus center subsol normal
   grid = math nu

```

```

\setupmathcases [...1,...] [...2,...]
1 NAME OPT
2 stanga = BEFEHL
   dreapta = BEFEHL
   strut = da nu
   stil = STYLE BEFEHL
   distanta = DIMENSION
   numberdistance = DIMENSION

```

`\setupmathematics [...1,...] [...2,...]`

```
1 NAME OPT
2 openup = da nu
  setsimbol = NAME
  functionstyle = STYLE BEFEHL
  compact = da nu
  aliniere = l2r r2l righttoleft
  bidi = da nu
  sygreek = normal italic niciunul
  lcgreek = normal italic niciunul
  ucgreek = normal italic niciunul
  italics = 1 2 3 4 niciunul reset
  autopunctuation = da nu tot comma yes,semicolon comma,semicolon all,semicolon
  setups = NAME
  domain = NAME reset
  stiltext = STYLE BEFEHL
  culoaretext = COLOR
  functioncolor = COLOR
  integral = limits nolimits autolimits displaylimits niciunul
  stylealternative = NAME
  implicit = normal italic
  fraction = ams ctx
  ampersand = normal
  collapsing = 1 2 3 niciunul reset
  kernpairs = da nu
```

`\setupmathfence [...1,...] [...2,...]`

```
1 NAME OPT
2 comanda = da nu
  stanga = NUMMER
  mijloc = NUMMER
  dreapta = NUMMER
  mathstyle = display text script scriptscript cramped uncramped normal impachetat mic mare
  culoare = COLOR
  stare = auto
  metoda = auto
  dimensiune = NUMMER
  factor = niciunul auto NUMMER
  mathclass = NUMMER
```

`\setupmathfraction [...1,...] [...2,...]`

```
1 NAME OPT
2 distantasus = DIMENSION
  distantajos = DIMENSION
  margine = DIMENSION
  culoare = COLOR
  strut = da nu math tight
  alternativ = intern extern ambele
  rigla = da nu auto
  stanga = NUMMER
  dreapta = NUMMER
  grosimerigla = DIMENSION
  mathstyle = STYLE BEFEHL
  distanta = nu niciunul overlay
  inlinethreshold = auto NUMMER
  displaythreshold = auto NUMMER
  fences = NAME
```

`\setupmathfractions [...1,...] [...2,...]`

```
1 NAME OPT
2 inherits: \setupmathfraction
```

`\setupmathframed [...1,...] [...2,...]`

```
1 NAME OPT
2 inherits: \seteazainconjurat
```

```

\setupmathmatrix [...1,...] [...2,...]
1 NAME OPT
2 stanga = BEFEHL
  dreapta = BEFEHL
  strut = da nu NUMMER
  aliniere = stanga centru dreapta normal
  stil = STYLE BEFEHL
  distanta = DIMENSION
  simplecommand = TEXT
  locatie = sus subsol inalt jos lohi normal

```

```

\setupmathornament [...1,...] [...2,...]
1 NAME OPT
2 alternativ = mp
  culoare = COLOR
  mpoffset = DIMENSION
  mp = NAME

```

```

\setupmathradical [...1,...] [...2,...]
1 NAME OPT
2 alternativ = implicit normal mp
  culoare = COLOR
  mpoffset = DIMENSION
  mp = NAME

```

```

\setupmathstackers [...1,...] [...2,...]
1 NAME OPT
2 stanga = BEFEHL
  dreapta = BEFEHL
  topcommand = \...##1
  bottomcommand = \...##1
  middlecommand = \...##1
  mp = NAME
  mpheight = DIMENSION
  mpdepth = DIMENSION
  mpoffset = DIMENSION
  culoare = COLOR
  hoffset = DIMENSION
  voffset = DIMENSION
  inaltimeminima = DIMENSION
  mindepth = DIMENSION
  mathclass = rel ord
  offset = min max normal
  locatie = sus subsol inalt jos centru NUMMER
  strut = da nu
  alternativ = normal implicit mp
  latimeminima = DIMENSION
  distanta = DIMENSION
  moffset = DIMENSION
  order = normal reverse
  mathlimits = da nu

```

```

\setupmathstyle [...,*...]
* display text script scriptscript cramped uncramped normal impachetat mic mare NAME

```



```
\setupmixedcolumns [...1,...] [...2,...]
```

```
1 NAME OPT  
2 grid = inherits: \definegridsnapping  
grosimerigla = DIMENSION  
metoda = otr box  
inainte = BEFEHL  
dupa = BEFEHL  
distanta = DIMENSION  
n = NUMMER  
inaltimemaxima = DIMENSION  
latimemaxima = DIMENSION  
pas = DIMENSION  
profile = NAME  
aliniere = inherits: \seteazaalinierea  
setups = NAME  
balanta = da nu  
splitmethod = niciunul fixat  
alternativ = local global  
internalgrid = linie jumatatelinie  
separator = rigla  
strut = da nu  
culoare = COLOR  
culoarerigla = COLOR  
directie = normal reverse  
inherits: \seteazainconjurat
```

```
\setupmodule [...1] [...2,...]
```

```
1 FILE OPT  
2 test = da nu  
KEY = VALUE
```

`\setupnotation [...1...] [...2...]`

```
1 NAME OPT
2 titlu = da nu
  numar = da nu
  type = note
  comandanumar = \...##1
  distantatitlu = DIMENSION
  stiltitlu = STYLE BEFEHL
  culoaretitlu = COLOR
  titlecommand = \...##1
  titleleft = BEFEHL
  titleright = BEFEHL
  stanga = BEFEHL
  dreapta = BEFEHL
  simbol = BEFEHL
  starter = BEFEHL
  stopper = BEFEHL
  cuplare = NAME
  counter = NAME
  nivel = NUMMER
  text = TEXT
  headcommand = \...##1
  inainte = BEFEHL
  dupa = BEFEHL
  intre = BEFEHL
  alternativ = stanga dreapta inmargin instanga indreapta margine marginestanga marginedreapta innermargin
              outermargin serried suspendat sus comanda note NAME
  aliniere = inherits: \seteazaalinierea
  headalign = inherits: \seteazaalinierea
  aliniat = inherits: \seteazaaliniat
  display = da nu
  aliniaturmator = da nu auto
  latime = ajustat broad linie DIMENSION
  distanta = niciunul DIMENSION
  dilatat = NUMMER
  shrink = NUMMER
  suspenda = ajustat broad niciunul margine NUMMER
  closesymbol = BEFEHL
  closecommand = \...##1
  expansiune = da nu xml
  referenceprefix = + - TEXT
  exemplu = TEXT
  margine = da nu standard DIMENSION
  stil = STYLE BEFEHL
  culoare = COLOR
  stiltitlu = STYLE BEFEHL
  culoaretitlu = COLOR
  alinieretitlu = da nu
  inherits: \setupcounter
```

`\setupnotations [...1...] [...2...]`

```
1 NAME OPT
2 inherits: \setupnotation
```

`\setupnote [...1,...] [...2,...]`

1 NAME OPT

2 interactiune = da nu numar text tot
symbolcommand = \...##1
comandatext = \...##1
indicator = da nu
separatorstext = BEFEHL
latime = DIMENSION
inaltime = DIMENSION
distanta = DIMENSION
rulecommand = BEFEHL
rigla = on dezactivat normal stanga dreapta comanda paragraf
split = tolerant strict foartestric NUMBER
factor = NUMBER
locatie = text pagina inalt subsol niciunul coloane firstcolumn lastcolumn
urmatorul = BEFEHL
n = NUMBER
culoarerigla = COLOR
grosimerigla = DIMENSION
setups = NAME
spatiereinterliniara = NAME
paragraf = da nu
inainte = BEFEHL
dupa = BEFEHL
intre = BEFEHL
scop = pagina
distantacoloane = DIMENSION
continua = da nu
alternativ = grila fixat coloane note niciunul
criteriu = pagina
fonttext = inherits: \seteazafonttext
aliniere = inherits: \seteazaalinierea
stiltext = STYLE BEFEHL
culoaretext = COLOR
anchor = urmatorul
spatiuinainte = inherits: \blanc
spaceinbetween = inherits: \blanc
inherits: \seteazainconjurat

`\setupnotes [...1,...] [...2,...]`

1 NAME OPT
2 inherits: \setupnote

`\setupoffset [...*,...]`

* inherits: \setupoffsetbox

`\setupoffsetbox [...*,...]`

* x = DIMENSION
y = DIMENSION
offsetstanga = DIMENSION
offsetdreapta = DIMENSION
offsetsus = DIMENSION
offsetjos = DIMENSION
metoda = fixat
latime = DIMENSION
inaltime = DIMENSION
inaltime = DIMENSION
locatie = stanga centru dreapta sus subsol linie l c r m t b g

`\setupoutputroutine [...1] [...2,...]`

1 NAME OPT
2 KEY = CSNAME

`\setupoutputroutine [...*]`

* NAME

`\setuppagechecker [...1,...] [...2,...]`

1 NAME OPT
2 linii = NUMMER
offset = DIMENSION
metoda = 0 1 2 3
inainte = BEFEHL
dupa = BEFEHL
intre = BEFEHL

`\setuppagecolumns [...1,...] [...2,...]`

1 NAME OPT
2 separator = NAME
directie = normal reverse
distanta = DIMENSION
n = NUMMER
latimemaxima = DIMENSION
aliniere = inherits: \seteazaalinierea
blanc = inherits: \blanc
culoare = COLOR
setups = NAME
inherits: \seteazainconjurat

`\setuppageinjection [...1,...] [...2,...]`

1 NAME OPT
2 stare = precedent urmatorul NUMMER
intarziere = da nu
alternativ = figura buffer setups niciunul NAME
pagina = inherits: \pagina
pagestate = start stop
n = NUMMER
inherits: \seteazainconjurat

`\setuppageinjectionalternative [...1,...] [...2,...]`

1 NAME OPT
2 renderingsetup = NAME

`\setuppageshift [...1] [...2] [...3]`

1 pagina foaie OPT OPT
2 NAME
3 NAME

`\setuppagestate [...1,...] [...2,...]`

1 NAME OPT
2 intarziere = da nu

`\setuppairedbox [...1,...] [...2,...]`

1 NAME OPT
2 inainte = BEFEHL
dupa = BEFEHL
intre = BEFEHL
locatie = stanga centru dreapta sus subsol inalt jos
n = NUMMER
distanta = DIMENSION
fonttext = inherits: \seteazafonttext
latime = DIMENSION
inaltime = DIMENSION
latimemaxima = DIMENSION
inaltimemaxima = DIMENSION
aliniere = inherits: \seteazaalinierea
stil = STYLE BEFEHL
culoare = COLOR

`\setarePAIREDBOX [...*,...]`

* inherits: \setuppairedbox
instances: legend

`\setarelegend [...*,...]`

* inherits: \setuppairedbox

```
\setuppaper [...,.*,...,]
* inherits: \seteazadimensiunihartie
```

```
\setupparagraph [...,1,...] [...,.*2,...]
1 NAME OPT
2 stil = STYLE BEFEHL
culoare = COLOR
alinieri = inherits: \seteazaalinieria
setups = NAME
```

```
\setupparagraphintro [...,1,...] [...,2,]
1 reset fiecare primul urmatorul
2 BEFEHL
```

```
\setupparallel [...,1,] [...,2,...] [...,.*3,...]
1 NAME
2 NAME
3 setups = NAME
start = NUMMER
n = NUMMER
criteriu = tot
```

```
\setupperiodkerning [...,1,...] [...,.*2,...]
1 NAME OPT
2 factor = NUMMER
```

```
\setupperiods [...,.*,...,]
* n = NUMMER
latime = DIMENSION ajustat
distanta = DIMENSION
simbol = BEFEHL
```

```
\setupplacement [...,1,...] [...,.*2,...]
1 NAME OPT
2 inainte = BEFEHL
dupa = BEFEHL
stanga = BEFEHL
dreapta = BEFEHL
grid = inherits: \snaptogrid
corectielinie = on dezactivat
corectieadancime = on dezactivat
margine = da nu standard
```

```
\setuppositionbar [...,.*,...,]
* stil = STYLE BEFEHL
culoare = COLOR
n = NUMMER
min = NUMMER
max = NUMMER
text = TEXT
latime = DIMENSION
inaltime = DIMENSION
inaltime = DIMENSION
```

```
\setupprocessor [...,1,...] [...,.*2,...]
1 NAME OPT
2 stare = start stop
stanga = BEFEHL
dreapta = BEFEHL
comanda = \...##1
stil = STYLE BEFEHL
culoare = COLOR
```

\setupprofile [...¹...] [...²...]

1 NAME OPT
2 inalttime = DIMENSION
inalttime = DIMENSION
distanta = DIMENSION
factor = NUMMER
linii = NUMMER
metoda = strict fixat niciunul

\setupquotation [...^{*}...]

* inherits: \setupdelimitedtext

\setuprealpagenumber [...^{*}...]

* inherits: \setupcounter

\setupreferenceformat [...¹...] [...²...]

1 NAME OPT
2 eticheta = * NAME
stanga = BEFEHL
dreapta = BEFEHL
type = implicit text titlu numar pagina realpage
setups = NAME
autocase = da nu
text = TEXT
stil = STYLE BEFEHL
culoare = COLOR

\setupreferenceprefix [...]

* + - TEXT

\setupreferencestructureprefix [...¹] [...²] [...³...]

1 NAME ABSCHNITT OPT OPT
2 implicit
3 prefix = da nu
prefixseparatorset = NAME
prefixconversion = NAME
prefixconversionset = NAME
prefixstarter = BEFEHL PROCESSOR->BEFEHL
prefixstopper = BEFEHL PROCESSOR->BEFEHL
prefixset = NAME
prefixsegments = NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tot ABSCHNITT ABSCHNITT:ABSCHNITT ABSCHNITT:* ABSCHNITT:tot
numberconversion = NAME
numberconversionset = NAME
numberstarter = BEFEHL PROCESSOR->BEFEHL
numberstopper = BEFEHL PROCESSOR->BEFEHL
numbersegments = NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tot
numberseparatorset = NAME
prefixconnector = BEFEHL PROCESSOR->BEFEHL

\setupregisters [...¹] [...²...]

1 NAME NAME:NUMMER OPT
2 inherits: \seteazaregstru

\setupregisters [...¹...] [...²...] [...³...]

1 NAME OPT OPT
2 NUMMER
3 inherits: \seteazaregstru

\setuprenderingwindow [...¹...] [...²...]

1 NAME OPT
2 actiunedeschiderepagina = REFERENCE
actiuneinchiderepagina = REFERENCE
inherits: \seteazainconjurat

```

\setupruby [...1,...] [...2,...]
1 NAME OPT
2 locatie = sus stanga dreapta
   aliniere = auto flushleft centru flushright
   dilatata = da nu
   hoffset = DIMENSION
   voffset = DIMENSION
   distanta = niciunul DIMENSION
   stanga = BEFEHL
   dreapta = BEFEHL
   stil = STYLE BEFEHL
   culoare = COLOR

```

```

\setups [...*,...]
* NAME

```

```

\setupscale [...1,...] [...2,...]
1 NAME OPT
2 scala = NUMMER
   xscala = NUMMER
   yscala = NUMMER
   latime = DIMENSION
   inaltime = DIMENSION
   inaltime = da nu
   linii = NUMMER
   factor = ajustat broad max min auto implicit
   hfactor = ajustat broad max min auto implicit
   factorw = ajustat broad max min auto implicit
   latimemaxima = DIMENSION
   inaltimemaxima = DIMENSION
   s = NUMMER
   sx = NUMMER
   sy = NUMMER
   equalwidth = DIMENSION
   equalheight = DIMENSION
   grid = da ajustat inaltime adancime jumatatelinie

```

```

\setupscript [...1,...] [...2,...]
1 NAME OPT
2 metoda = hangul hanzi nihongo ethiopic thai test
   preset = NAME
   features = auto

```

```

\setupscripts [...1,...] [...2,...]
1 NAME OPT
2 inherits: \setupscript

```

```

\setupselector [...1,...] [...2,...]
1 NAME
2 n = NUMMER
   m = NUMMER

```

```

\setupshift [...1,...] [...2,...]
1 NAME OPT
2 continua = da nu
   unitate = ex em pt in cm mm sp bp pc dd cc nc
   metoda = NUMMER
   dy = NUMMER
   aliniere = inherits: \seteazaalinierea
   stil = STYLE BEFEHL
   culoare = COLOR

```

```

\setupsidebar [...1,...] [...2,...]
1 NAME OPT
2 grosimerigla = DIMENSION
   culoarerigla = COLOR
   alternativ = NUMMER
   offsetsus = DIMENSION
   offsetjos = DIMENSION
   distanta = DIMENSION
   distantamarginestanga = DIMENSION
   nivel = NUMMER

```

`\setupspellchecking [...,.*,...]`

* stare = start stop
metoda = 1 2 3
lista = NAME

`\setupstartstop [...,1...] [...,.*2...]`

1 NAME OPT
2 inainte = BEFEHL
dupa = BEFEHL
intre = BEFEHL
setups = NAME
stanga = BEFEHL
dreapta = BEFEHL
stil = STYLE BEFEHL
culoare = COLOR

`\setupstretched [...,.*,...]`

* inherits: \setupcharacterkerning

`\setupstruts [.*]`

* da nu auto cap OPTjustat linie implicit CHARACTER

`\setupstyle [...,1...] [...,.*2...]`

1 NAME OPT
2 metoda = comanda
stil = STYLE BEFEHL
culoare = COLOR

`\setupsubformula [...,1...] [...,.*2...]`

1 NAME OPT
2 aliniaturmator = da nu auto

`\setupsubformulas [...,1...] [...,.*2...]`

1 NAME OPT
2 inherits: \setupsubformula

`\setupsynctex [...,.*,...]`

* stare = start stop
metoda = min max

`\setups {...,*...}`

* NAME


```

\setupTABLE [...1...] [...2...] [...3...]
1 r c x y rand colOPTana primul uOPTtim start antet fiecare impar par unu NUMBER -NUMBER
2 primul least fiecare doi impar par NUMBER -NUMBER
3 extras = BEFEHL
  stanga = BEFEHL
  dreapta = BEFEHL
  culoaretitlu = COLOR
  stiltitlu = STYLE BEFEHL
  distantamarginestanga = DIMENSION
  distantamarginedreapta = DIMENSION
  distantacoloane = DIMENSION
  latimemaxima = DIMENSION
  setups = NAME
  latimetext = DIMENSION local
  split = da nu repetat auto
  antet = repetat
  optiune = dilatat tight
  inainte = BEFEHL
  dupa = BEFEHL
  aceeasipagina = inainte dupa ambele
  spaceinbetween = inherits: \blanc
  splitoffset = DIMENSION
  aliniazacaracter = da nu
  alieracaracter = TEXT number->TEXT text->TEXT
  distanta = DIMENSION
  culoare = COLOR
  stil = math STYLE BEFEHL
  inherits: \seteazainconjurat

```

```

\setupTEXpage [...*...]
* inherits: \setupfittingpage

```

```

\setuptabulation [...1...] [...2...]
1 NAME OPT
2 format = TEMPLATE niciunul
  inainte = BEFEHL
  dupa = BEFEHL
  distanta = mic mediu mare niciunul blank adancime grila DIMENSION
  blanc = preferinta aceeasipagina max fortat enable dezactivat faraalb impachetat inapot overlay
  totdeauna weak strong implicit inainte intre dupa fixat flexibil niciunul mic mediu mare
  linie jumatatelinie quarterline formula alb inaltime adancime standard NUMBER*mic NUMBER*mediu
  NUMBER*mare NUMBER*linie NUMBER*jumatatelinie NUMBER*quarterline NUMBER*formula NUMBER*alb
  NUMBER*inaltime NUMBER*adancime category:NUMBER order:NUMBER penalty:NUMBER DIMENSION NAME
  stiltitlu = STYLE BEFEHL
  culoaretitlu = COLOR
  fundal = NAME
  culoarefundal = COLOR
  foregroundstyle = STYLE BEFEHL
  foregroundcolor = COLOR
  aliniere = stanga centru dreapta dimension
  rigla = linie normal
  culoarerigla = COLOR
  grosimerigla = DIMENSION
  fonttext = inherits: \seteazafonttext
  aliniat = da nu
  split = da nu repetat auto
  unitate = DIMENSION
  margine = DIMENSION
  intern = BEFEHL
  EQ = BEFEHL
  antet = da repetat text
  frame = on dezactivat
  titlu = TEXT
  keptogether = da nu

```

```

\setuptagging [...*...]
* stare = start stop
  metoda = auto

```

`\setuptextbackground [...1...]2 [...2...]`

1 NAME OPT
2 stare = start stop
locatie = text paragraf totdeauna niciunul
criteriu = NUMMER
alternativ = NUMBER
mp = NAME
metoda = NAME
fundal = culoare
culoarefundal = COLOR
colt = rectangular rotund
nivel = NUMBER
offsetfundal = DIMENSION
inainte = BEFEHL
dupa = BEFEHL
alinieri = inherits: \setezaalinieria
dash = NUMMER
raza = DIMENSION
frame = on dezactivat
culoareframe = COLOR
grosimerigla = DIMENSION
voffset = DIMENSION
offsetframe = DIMENSION
offsetstanga = da nu standard DIMENSION
offsetdreapta = da nu standard DIMENSION
offsetsus = mic mediu mare linie DIMENSION
offsetjos = mic mediu mare linie DIMENSION
stil = STYLE BEFEHL
culoare = COLOR

`\setuptextflow [...1...]2 [...2...]`

1 NAME OPT
2 latime = DIMENSION
stil = STYLE BEFEHL
culoare = COLOR

`\setuptooltip [...1...]2 [...2...]`

1 NAME OPT
2 locatie = stanga centru dreapta
inherits: \setezainconjurat

`\setupunit [...1...]2 [...2...]`

1 NAME OPT
2 metoda = 1 2 3 4 5 6
language = SPRACHE
alternativ = text matematica
order = reverse normal
separator = mic mediu mare normal niciunul NAME
spatiu = mic mediu mare normal niciunul NAME
stil = STYLE BEFEHL
culoare = COLOR

`\setupuserpagenumber [...*...]`

* viewerprefix = TEXT
stare = start stop niciunul mentine gol
inherits: \setupcounter

`\setupversion [...]`

* concept fisier temporar final NAME

`\setupviewerlayer [...*...]`

* titlu = TEXT
stare = start stop
export = da nu
tiparibil = da nu
scop = local global
metoda = niciunul comanda

`\setupvspacing [...*...]`

* inherits: \vspacing OPT

`\setupwithargument {...} {...}`

1 NAME
2 CONTENT

`\setupwithargumentswapped {...} {...}`

1 CONTENT
2 NAME

`\setupxml [...,.*...,...]`

* implicit = ascuns niciunul text
compress = da nu

`\setupxtable [...,1...] [...,2...,...]`

1 NAME OPT
2 latimetext = DIMENSION local
fonttext = inherits: \seteazafonttext
spaceinbetween = inherits: \blanc
optiune = tight max dilatat latime inaltime fixat
inaltimetext = DIMENSION
latimemaxima = DIMENSION
distantacoloane = DIMENSION
distantamarginestanga = DIMENSION
distantamarginedreapta = DIMENSION
antet = repetat
subsol = repetat
grosimerigla = DIMENSION
split = da nu repetat auto
splitoffset = DIMENSION
aceeasipagina = inainte dupa ambele
distanta = DIMENSION
aliniazacarakter = da nu
alignmentleftsample = TEXT
alignmentrightsample = TEXT
alignmentleftwidth = DIMENSION
alignmentrightwidth = DIMENSION
alierecaracter = TEXT
inherits: \seteazainconjurat

`\setuvalue {...} {...}`

1 NAME
2 CONTENT

`\setuxvalue {...} {...}`

1 NAME
2 CONTENT

`\setvalue {...} {...}`

1 NAME
2 CONTENT

`\setvariable {...} {...} {...}`

1 NAME
2 KEY
3 VALUE

`\setvariables [...]1 [...,2...,...]`

1 NAME
2 set = BEFEHL
reset = BEFEHL
KEY = VALUE

`\setvboxregister ...1 {...}`

1 CSNAME NUMBER
2 CONTENT

`\setvisualizerfont [...]*`

* FONT OPT

`\setvtopregister .1. {2..}`

1 CSNAME NUMBER
2 CONTENT

`\setwidthof .1. \to \2..`

1 TEXT
2 CSNAME

`\setxmeasure {1..} {2..}`

1 NAME
2 DIMENSION

`\setxvalue {1..} {2..}`

1 NAME
2 CONTENT

`\setxvariable {1..} {2..} {3..}`

1 NAME
2 KEY
3 VALUE

`\setxvariables [1..] [2..,3..,4..]`

1 NAME
2 set = BEFEHL
reset = BEFEHL
KEY = VALUE

`\shapedhbox {*..}`

* CONTENT

`\SHIFT {*..}`

* CONTENT

instances: shiftup shiftdown

`\shiftdown {*..}`

* CONTENT

`\shiftup {*..}`

* CONTENT

`\showallmakeup`

`\showattributes`

`\showboxes`

`\showbtxdatasetauthors [*..,*..,*..]`

* specification = NAME OPT
dataset = NAME
field = address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution
journal language luna monthfiled nationality note numar unu doi organization pages publisher
school series titlu type volume an yearfiled NAME

`\showbtxdatasetauthors [*..]`

* NAME OPT

`\showbtxdatasetcompleteness [*..,*..,*..]`

* specification = NAME OPT
dataset = NAME
field = address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution
journal language luna monthfiled nationality note numar unu doi organization pages publisher
school series titlu type volume an yearfiled NAME

<pre> \showbtxdatasetcompleteness [...] * NAME OPT </pre>
<pre> \showbtxdatasetfields [..., ...[*], ...] * specification = NAME OPT dataset = NAME field = address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an yearfiled NAME </pre>
<pre> \showbtxdatasetfields [...] * NAME OPT </pre>
<pre> \showbtxfields [..., ...[*], ...] * rotatie = NUMMER OPT specification = NAME </pre>
<pre> \showbtxfields [...] * NAME OPT </pre>
<pre> \showbtxhashedauthors [...] * TEXT OPT </pre>
<pre> \showbtxtables [...] * TEXT OPT </pre>
<pre> \showchardata {...} * TEXT </pre>
<pre> \showcharratio {...} * TEXT </pre>
<pre> \showcolorbar [...] * COLOR </pre>
<pre> \showcolorcomponents [...] * COLOR </pre>
<pre> \showcolorset [...] * COLOR </pre>
<pre> \showcolorstruts </pre>
<pre> \showcounter [...] * NAME </pre>
<pre> \showdirectives </pre>
<pre> \showdirsinmargin </pre>
<pre> \showedebuginfo </pre>
<pre> \showexperiments </pre>
<pre> \showfont [...] [...², ...] 1 FONT OPT 2 NUMBER </pre>

<code>\showfontdata</code>
<code>\showfontexpansion</code>
<code>\showfontitalics</code>
<code>\showfontkerns</code>
<code>\showfontparameters</code>
<code>\showfontstrip [...*...]</code> * inherits: \seteazafonttext
<code>\showfontstyle [...¹...] [...²...] [...³...] [...⁴...]</code> 1 inherits: \seteazafonttext 2 rm ss tt mm hw cg 3 tf bf it sl bi bs 4 tot NUMBER
<code>\showglyphdata</code>
<code>\showglyphs</code>
<code>\showgridsnapping</code>
<code>\showhelp {...} [...]</code> 1 TEXT 2 REFERENCE
<code>\showhyphenationtrace [...¹] [...²]</code> 1 SPRACHE 2 TEXT
<code>\showhyphens {...}</code> * TEXT
<code>\showinjector [...*...]</code> * NAME
<code>\showjustification</code>
<code>\showkerning {...}</code> * TEXT
<code>\showlayoutcomponents</code>
<code>\showligature {...}</code> * TEXT
<code>\showligatures [...]</code> * FONT
<code>\showlogcategories</code>
<code>\showmargins</code>

\showmessage {...} {...} {...,³...}

1 NAME
2 NAME NUMBER
3 TEXT

\showminimalbaseline

\shownextbox \... {...}

1 CSNAME
2 CONTENT

\showotfcomposition {...} {...} {...}

1 FONT
2 -1 1 +1 12r r2l
3 TEXT

\showparentchain \... {...}

1 CSNAME
2 NAME

\showsetupsdefinition [...]

* NAME

\showtimer {...}

* TEXT

\showtokens [...]

* NAME

\showtrackers

\showvalue {...}

* NAME

\showvariable {...} {...}

1 NAME
2 KEY

\showwarning {...} {...} {...,³...}

1 NAME
2 NAME NUMBER
3 TEXT

\simbol [...] [...]

1 NAME ^{OPT}
2 NAME

\simbol {...}

* NAME

\simplealignedbox {...} {...} {...}

1 DIMENSION
2 stanga dreapta centru flushleft flushright intern extern
3 CONTENT

\simplealignedboxplus {...} {...} {...} {...}

1 DIMENSION
2 stanga dreapta centru flushleft flushright intern extern
3 TEXT
4 CONTENT

```
\simplealignedspreadbox {...} {...} {...}
1 DIMENSION
2 stanga dreapta centru flushleft flushright intern extern
3 CONTENT
```

```
\simplegroupedcommand {...} {...}
1 BEFEHL
2 BEFEHL
```

```
\simplereversealignedbox {...} {...} {...}
1 DIMENSION
2 stanga dreapta centru flushleft flushright intern extern
3 CONTENT
```

```
\simplereversealignedboxplus {...} {...} {...} {...}
1 DIMENSION
2 stanga dreapta centru flushleft flushright intern extern
3 TEXT
4 CONTENT
```

```
\singalcharacteralign {...} {...}
1 NUMMER
2 NUMMER
```

```
\singlebond
```

```
\sixthofsixarguments {...} {...} {...} {...} {...} {...}
1 TEXT
2 TEXT
3 TEXT
4 TEXT
5 TEXT
6 TEXT
```

```
\slantedface
```

```
\slicepages [...] [...2...] [...3...]
1 FILE OPT OPT
2 offset = DIMENSION
hoffset = DIMENSION
voffset = DIMENSION
latime = DIMENSION
inaltime = DIMENSION
n = NUMMER
3 offset = DIMENSION
hoffset = DIMENSION
voffset = DIMENSION
latime = DIMENSION
inaltime = DIMENSION
n = NUMMER
```

```
\slovenianNumerals {...}
* NUMMER
```

```
\sloveniannumerals {...}
* NUMMER
```

```
\smallbodyfont
```

```
\smallcappedcharacters {...}
* NUMMER
```

```
\smallcappedromannumerals {...}
* NUMMER
```


<code>\smaller</code>
<code>\smallskip</code>
<code>\smash [^.^.] {.^.^}</code> 1 <code>w h d t</code> ^{OPT} 2 <code>CONTENT</code>
<code>\smashbox .^.*</code> * <code>CSNAME NUMBER</code>
<code>\smashboxed .^.*</code> * <code>CSNAME NUMBER</code>
<code>\smashedhbox .^.. {.^..}</code> 1 <code>TEXT</code> ^{OPT} 2 <code>CONTENT</code>
<code>\smashedvbox .^.. {.^..}</code> 1 <code>TEXT</code> ^{OPT} 2 <code>CONTENT</code>
<code>\snaptogrid [^.^.] \.^.. {.^..}</code> 1 <code>normal standard</code> ^{OPT} <code>da strict tolerant sus subsol ambele broad ajustat primul ultim inalt unu jos niciunul linie strut</code> <code>box min max centru math math:linie math:jumatatelinie math:-line math:-halflin</code> <code>NAME</code> 2 <code>CSNAME</code> 3 <code>CONTENT</code>
<code>\snaptogrid [...,^.,...] \.^.. {.^..}</code> 1 <code>inherits: \define</code> ^{OPT} <code>gridsnapping</code> 2 <code>CSNAME</code> 3 <code>CONTENT</code>
<code>\someheadnumber [^.^.] [.^..]</code> 1 <code>ABSCHNITT</code> 2 <code>precedent curent urmatorul primul ultim</code>
<code>\somekindoftab [...,^.,...]</code> * <code>alternativ = orizontal</code> ^{OPT} <code>vertical</code> <code>latime = DIMENSION</code> <code>inaltime = DIMENSION</code> <code>n = NUMMER</code> <code>m = NUMMER</code>
<code>\somallocalfloat</code>
<code>\somenamedheadnumber {.^..} {.^..}</code> 1 <code>ABSCHNITT</code> 2 <code>precedent curent urmatorul primul ultim</code>
<code>\someplace {.^..} {.^..} {.^..} {.^..} {.^..} [.^..]</code> 1 <code>TEXT</code> 2 <code>TEXT</code> 3 <code>TEXT</code> 4 <code>TEXT</code> 5 <code>TEXT</code> 6 <code>REFERENCE</code>
<code>\SORTING [^.^.] {.^..}</code> 1 <code>NAME</code> ^{OPT} 2 <code>CONTENT</code> <code>instances: logo</code>

$\backslash\text{logo}$ [¹ ...] { ² ...} 1 NAME <small>OPT</small> 2 CONTENT
$\backslash\text{spanishNumerals}$ {...} * NUMBER
$\backslash\text{spanishnumerals}$ {...} * NUMBER
$\backslash\text{spatiifixate}$
$\backslash\text{spatiu}$
$\backslash\text{spatiufixat}$
$\backslash\text{splitatasterisk}$ ¹ ... \ ² ... \ ³ ... 1 TEXT 2 CSNAME 3 CSNAME
$\backslash\text{splitatcolon}$ ¹ ... \ ² ... \ ³ ... 1 TEXT 2 CSNAME 3 CSNAME
$\backslash\text{splitatcolons}$ ¹ ... \ ² ... \ ³ ... 1 TEXT 2 CSNAME 3 CSNAME
$\backslash\text{splitatcomma}$ ¹ ... \ ² ... \ ³ ... 1 TEXT 2 CSNAME 3 CSNAME
$\backslash\text{splitatperiod}$ ¹ ... \ ² ... \ ³ ... 1 TEXT 2 CSNAME 3 CSNAME
$\backslash\text{splitfrac}$ { ¹ ...} { ² ...} 1 CONTENT 2 CONTENT
$\backslash\text{splitfilename}$ {...} * FILE
$\backslash\text{splitfrac}$ { ¹ ...} { ² ...} 1 CONTENT 2 CONTENT
$\backslash\text{splitoffbase}$
$\backslash\text{splitofffull}$
$\backslash\text{splitoffkind}$
$\backslash\text{splitoffname}$

<code>\splitoffpath</code>
<code>\splitoffroot</code>
<code>\splitofftokens</code> ^{1.} \from ^{2.} \to \ ^{3.} 1 TEXT 2 TEXT 3 CSNAME
<code>\splitofftype</code>
<code>\splitstring</code> ^{1.} \at ^{2.} \to \ ^{3.} \and \ ^{4.} 1 TEXT 2 TEXT 3 CSNAME 4 CSNAME
<code>\spreadhbox</code> [*] * CSNAME NUMBER
<code>\sqrt</code> [^{1.}] { ^{2.} } 1 TEXT <small>OPT</small> 2 CONTENT
<code>\stackrel</code> { ^{1.} } { ^{2.} } 1 CONTENT 2 CONTENT
<code>\stanga</code> [*] * CHARACTER
<code>\start</code> [[*]] ... \stop * NAME <small>OPT</small>
<code>\startalignment</code> [... [*] ,...] ... \stopalignment * inherits: \seteazaalinierea
<code>\startaliniatcentru</code> ... \stopaliniatcentru
<code>\startaliniatdreapta</code> ... \stopaliniatdreapta
<code>\startaliniatstanga</code> ... \stopaliniatstanga
<code>\startallmodes</code> [... [*] ,...] ... \stopallmodes * NAME
<code>\startantettabel</code> [[*]] ... \stopantettabel * NAME
<code>\startATTACHMENT</code> [^{1.}] [... ^{2.} ,... ^{3.} ,...] ... \stopATTACHMENT 1 NAME <small>OPT</small> <small>OPT</small> 2 inherits: \setupattachment instances: attachment
<code>\startattachment</code> [^{1.}] [... ^{2.} ,... ^{3.} ,...] ... \stopattachment 1 NAME <small>OPT</small> <small>OPT</small> 2 inherits: \setupattachment

`\startbar [...] ... \stopbar`

* NAME

`\startbordermatrix ... \stopbordermatrix`

`\startbitmapimage [...,...*...,...] ... \stopbitmapimage`

* culoare = rgb cmyk gri
latime = DIMENSION
inaltime = DIMENSION
x = NUMMER
y = NUMMER

`\startblocsectiuneambient [...] ... \stopblocsectiuneambient`

* NAME

`\startbordermatrix ... \stopbordermatrix`

`\startbtxrenderingdefinitions [...] ... \stopbtxrenderingdefinitions`

* NAME

`\startbuffer [...] ... \stopbuffer`

* NAME OPT

`\startBUFFER ... \stopBUFFER`

instances: hiding

`\starthiding ... \stophiding`

`\startcatcodetable *... ... \stopcatcodetable`

* CSNAME

`\startcenteraligned ... \stopcenteraligned`

`\startcharacteralign [...,...*...,...] ... \stopcharacteralign`

* inherits: \setupcharacteralign

`\startcharacteralign [...] ... \stopcharacteralign`

* TEXT number->TEXT text->TEXT

`\startcheckedfences ... \stopcheckedfences`

`\startchemical [1...] [...,...2...,...] ... \stopchemical`

1 NAME OPT
2 inherits: \setupchemical

`\startcollect ... \stopcollect`

`\startcollecting ... \stopcollecting`

`\startcoloane [...,...*...,...] ... \stopcoloane`

* inherits: \seteazacol–h–e

`\startcolorintent [...] ... \stopcolorintent`

* knockout overprint niciunul

`\startcoloronly [...] ... \stopcoloronly`

* COLOR

<pre> \startcolorset [...] ... \stopcolorset * NAME </pre>
<pre> \startcolumnset [¹...] [²...,...²...,...] ... \stopcolumnset 1 NAME OPT OPT 2 inherits: \setupcolumnset </pre>
<pre> \startcolumnsetspan [¹...] [²...,...²...,...] ... \stopcolumnsetspan 1 NAME OPT 2 inherits: \setupcolumnsetspan </pre>
<pre> \startCOLUMNSET [...,...[*]...,...] ... \stopCOLUMNSET * inherits: \setupcolumnset^{OPT} </pre>
<pre> \startcolumnspan [...,...[*]...,...] ... \stopcolumnspan * inherits: \setupcolumnspan^{OPT} </pre>
<pre> \startcombination [¹...] [²...,...²...,...] ... \stopcombination 1 NAME OPT OPT 2 inherits: \setupcombination </pre>
<pre> \startcombination [¹...] [²...] ... \stopcombination 1 NAME OPT OPT 2 N*M </pre>
<pre> \startcomentariupagina ... \stopcomentariupagina </pre>
<pre> \startCOMMENT [¹...] [²...,...²...,...] ... \stopCOMMENT 1 TEXT OPT OPT 2 inherits: \seteazacomentariu instances: comment </pre>
<pre> \startcomment [¹...] [²...,...²...,...] ... \stopcomment 1 TEXT OPT OPT 2 inherits: \seteazacomentariu </pre>
<pre> \startcomponenta [...] ... \stopcomponenta * FILE * </pre>
<pre> \startcomponenta \stopcomponenta * FILE * </pre>
<pre> \startcontextcode ... \stopcontextcode </pre>
<pre> \startcontextdefinitioncode ... \stopcontextdefinitioncode </pre>
<pre> \startctxfunction \stopctxfunction * NAME </pre>
<pre> \startctxfunctiondefinition \stopctxfunctiondefinition * NAME </pre>
<pre> \startculoare [...] ... \stopculoare * COLOR </pre>
<pre> \startcurrentcolor ... \stopcurrentcolor </pre>
<pre> \startcurrentlistentrywrapper ... \stopcurrentlistentrywrapper </pre>

<code>\startEFFECT ... \stopEFFECT</code>
<code>\startelement [...,*...] ... \stopelement</code> * REFERENCE OPT
<code>\startembeddedxtable [...,*...] ... \stopembeddedxtable</code> * inherits: \setupxtable OPT
<code>\startembeddedxtable [...*] ... \stopembeddedxtable</code> * NAME OPT
<code>\startENUMERARE [...,*...] ... \stopENUMERARE</code> * titlu = TEXT OPT * semncarte = TEXT * lista = TEXT * referinta = REFERENCE
<code>\startENUMERARE [...,¹...] {²...} ... \stopENUMERARE</code> 1 REFERENCE OPT OPT 2 TEXT
<code>\startexceptions [...*] ... \stopexceptions</code> * SPRACHE
<code>\startexpanded ... \stopexpanded</code>
<code>\startexpandedcollect ... \stopexpandedcollect</code>
<code>\startextendedcatcodetable *... ... \stopextendedcatcodetable</code> * CSNAME
<code>\startexternalfigurecollection [...*] ... \stopexternalfigurecollection</code> * NAME
<code>\startfacingfloat [...*] ... \stopfacingfloat</code> * NAME
<code>\startfigura [¹...] [²...] [...,³...] ... \stopfigura</code> 1 NAME 2 FILE 3 inherits: \figuraexterna OPT
<code>\startfittingpage [¹...] [...,²...] ... \stopfittingpage</code> 1 NAME OPT 2 inherits: \setupfittingpage
<code>\startFITTINGPAGE [...,*...] ... \stopFITTINGPAGE</code> * inherits: \setupfittingpage ^{OPT} instances: TEXpage MPpage
<code>\startMPpage [...,*...] ... \stopMPpage</code> * inherits: \setupfittingpage ^{OPT}
<code>\startTEXpage [...,*...] ... \stopTEXpage</code> * inherits: \setupfittingpage ^{OPT}
<code>\startfixat [...*] ... \stopfixat</code> * jos centru inaff lohi implicit

`\startfloatcombination [..., ...*...] ... \stopfloatcombination`

* inherits: \setupcombination ^{OPT}

`\startfloatcombination [...*] ... \stopfloatcombination`

* N*M NAME ^{OPT}

`\startFLOATtext [...,1...] [...,2...] {...3} ... \stopFLOATtext`

1 split totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta inmarginie marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta undeva effective antet subsol

2 REFERENCE

3 TEXT

instances: chemical figure table intermezzo graphic

`\startchemicaltext [...,1...] [...,2...] {...3} ... \stopchemicaltext`

1 split totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta inmarginie marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta undeva effective antet subsol

2 REFERENCE

3 TEXT

`\startfiguretext [...,1...] [...,2...] {...3} ... \stopfiguretext`

1 split totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta inmarginie marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta undeva effective antet subsol

2 REFERENCE

3 TEXT

`\startgraphictext [...,1...] [...,2...] {...3} ... \stopgraphictext`

1 split totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta inmarginie marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta undeva effective antet subsol

2 REFERENCE

3 TEXT

`\startintermezzotext [...,1...] [...,2...] {...3} ... \stopintermezzotext`

1 split totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta inmarginie marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta undeva effective antet subsol

2 REFERENCE

3 TEXT

`\starttabletext [...,1...] [...,2...] {...3} ... \stoptabletext`

1 split totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta inmarginie marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta undeva effective antet subsol

2 REFERENCE

3 TEXT

`\startfont [...*] ... \stopfont`

* FONT ^{OPT}

`\startfontclass [...*] ... \stopfontclass`

* fiecare NAME

<pre> \startfontsolution [...] ... \stopfontsolution * NAME </pre>
<pre> \startformula [...,*...] ... \stopformula * impachetat tigh centr^{OPT}u incadrat adancime linie jumatatelinie -linie -jumatatelinie inherits: \seteazafonttext </pre>
<pre> \startformula [...,*=...] ... \stopformula * optiune = impachetat^{OPT}tigh centr^{OPT}u incadrat adancime linie jumatatelinie -linie -jumatatelinie inherits: \seteazafonttext margine = da nu standard DIMENSION grid = inherits: \snaptogrid </pre>
<pre> \startFORMULAformula [...,*...] ... \stopFORMULAformula * impachetat tigh centr^{OPT}u incadrat adancime linie jumatatelinie -linie -jumatatelinie inherits: \seteazafonttext instances: sp sd mp md </pre>
<pre> \startmdformula [...,*...] ... \stopmdformula * impachetat tigh centr^{OPT}u incadrat adancime linie jumatatelinie -linie -jumatatelinie inherits: \seteazafonttext </pre>
<pre> \startmpformula [...,*...] ... \stopmpformula * impachetat tigh centr^{OPT}u incadrat adancime linie jumatatelinie -linie -jumatatelinie inherits: \seteazafonttext </pre>
<pre> \startsdfformula [...,*...] ... \stopsdfformula * impachetat tigh centr^{OPT}u incadrat adancime linie jumatatelinie -linie -jumatatelinie inherits: \seteazafonttext </pre>
<pre> \startspformula [...,*...] ... \stopspformula * impachetat tigh centr^{OPT}u incadrat adancime linie jumatatelinie -linie -jumatatelinie inherits: \seteazafonttext </pre>
<pre> \startformule [...,*...] ... \stopformule * + - REFERENCE ^{OPT} </pre>
<pre> \startframed [¹...] [...,²...] ... \stopframed 1 NAME ^{OPT} ^{OPT} 2 inherits: \seteazainconjurat </pre>
<pre> \startframedcell [...,*=...] ... \stopframedcell * inherits: \seteazainconjurat </pre>
<pre> \startframedcontent [...] ... \stopframedcontent * NAME dezactivat ^{OPT} </pre>
<pre> \startframedrow [...,*=...] ... \stopframedrow * inherits: \seteazainconjurat^{OPT} </pre>
<pre> \startframedtable [¹...] [...,²...] ... \stopframedtable 1 NAME ^{OPT} ^{OPT} 2 inherits: \seteazainconjurat </pre>
<pre> \startfundal [...,*=...] ... \stopfundal * inherits: \seteazafundal </pre>
<pre> \startFUNDAL [...,*=...] ... \stopFUNDAL * inherits: \seteazafundal instances: fundal </pre>
<pre> \startgridsnapping [...] ... \stopgridsnapping * normal standard da stric^{OPT}t tolerant sus subsol ambele broad ajustat primul ultim inalt unu jos niciunul linie strut box min max centru math math:linie math:jumatatelinie math:-line math:-halfline NAME </pre>

<pre> \startgridsnapping [...,*...] ... \stopgridsnapping * inherits: \definegridsnapping^{OPT} </pre>
<pre> \starthboxestohbox ... \stophboxestohbox </pre>
<pre> \starthboxregister ... \stophboxregister * CSNAME NUMBER </pre>
<pre> \startHELP [...] ... \stopHELP * REFERENCE ^{OPT} instances: helptext </pre>
<pre> \starthelptext [...] ... \stophelptext * REFERENCE ^{OPT} </pre>
<pre> \starthighlight [...] ... \stophighlight * NAME </pre>
<pre> \starthyphenation [...,*...] ... \stophyphenation * original tex implicit hyphenate expanded traditional niciunul </pre>
<pre> \startimath ... \stopimath </pre>
<pre> \startimpachetat [...] ... \stopimpachetat * blank ^{OPT} </pre>
<pre> \startindentedtext [...] ... \stopindentedtext * NAME </pre>
<pre> \startINDENTEDTEXT ... \stopINDENTEDTEXT </pre>
<pre> \startingust [...] [...,¹...²...,...] ... \stoppingust 1 NAME ^{OPT} ^{OPT} 2 inherits: \seteazaingust </pre>
<pre> \startingust [...,¹...,...] [...,²...,...] ... \stoppingust 1 inherits: \seteazaingust^{OPT} ^{OPT} 2 [-+]stanga [-+]centru [-+]dreapta NUMMER*stanga NUMMER*centru NUMMER*dreapta reset reverse </pre>
<pre> \startingust [...] [...,¹...²...,...] ... \stoppingust 1 NAME ^{OPT} ^{OPT} 2 [-+]stanga [-+]centru [-+]dreapta NUMMER*stanga NUMMER*centru NUMMER*dreapta reset reverse </pre>
<pre> \startinteractiune [...] ... \stopinteractiune * ascuns NAME </pre>
<pre> \startinterface ... \stopinterface * tot SPRACHE </pre>
<pre> \startintertext ... \stopintertext </pre>
<pre> \startitemgroup [...] [...,¹...²...,...] [...,³...,...] ... \stopitemgroup 1 NAME ^{OPT} ^{OPT} 2 inherits: \setupitemgroup 3 inherits: \setupitemgroup </pre>

```

\startITEMGROUP [...1,...] [...2,...OPT,...] ... \stopITEMGROUP
1 inherits: \setupitemgroupOPT
2 inherits: \setupitemgroup
instances: itemize

```

```

\startitemize [...1,...] [...2,...OPT,...] ... \stopitemize
1 inherits: \setupitemgroupOPT
2 inherits: \setupitemgroup

```

```

\startJScode ...1 ...2 ...3 ... \stopJScode
1 NAME
2 uses
3 NAME

```

```

\startJSreamble ...1 ...2 ...3 ... \stopJSreamble
1 NAME
2 folositi
3 now later

```

```

\startknockout ... \stopknockout

```

```

\startlayout [...] ... \stoplayout
* NAME

```

```

\startlinealignment [...] ... \stoplinealignment
* stanga centru dreapta max

```

```

\startlinecorrection [...*,...] ... \stoplinecorrection
* blank inherits: \blancOPT

```

```

\startlinefiller [...1,...] [...2,...OPT,...] ... \stoplinefiller
1 filler NAME
2 inherits: \setuplinefiller

```

```

\startLINENOTE [...1,...] {...2}
1 REFERENCE
2 TEXT
instances: linenote

```

```

\startlinenote [...1,...] {...2}
1 REFERENCE
2 TEXT

```

```

\startlinenumbering [...1,...] [...2,...OPT,...] ... \stoplinenumbering
1 NAME
2 continua = da nu
start = NUMMER
pas = NUMMER
metoda = pagina primul urmatorul

```

```

\startlinenumbering [...1,...] [...2,...] ... \stoplinenumbering
1 NAME
2 continuu NUMMER

```

```

\startlinetable ... \stoplinetable

```

```

\startlinetablebody ... \stoplinetablebody

```

```

\startlinetablecell [...*,...] ... \stoplinetablecell
* inherits: \setuplinetableOPT

```

<code>\startlinetablehead ... \stoplinetablehead</code>
<code>\startlinie [...]</code> * REFERENCE
<code>\startliniemargin [...]</code> ... <code>\stopliniemargin</code> * NUMMER OPT
<code>\startliniemargin [...,*,...]</code> ... <code>\stopliniemargin</code> * inherits: \setupmarginrule OPT
<code>\startLINES [...,*,...]</code> ... <code>\stopLINES</code> * inherits: \seteazal ^{OPT} iii instances: lines
<code>\startlines [...,*,...]</code> ... <code>\stoplines</code> * inherits: \seteazal ^{OPT} iii
<code>\startlocalfootnotes ... \stoplocalfootnotes</code>
<code>\startlocalheadsetup ... \stoplocalheadsetup</code>
<code>\startlocallinecorrection [...,*,...]</code> ... <code>\stoplocallinecorrection</code> * blank inherits: \blanc OPT
<code>\startlocalnotes [...,*,...]</code> ... <code>\stoplocalnotes</code> * NAME
<code>\startlocalsetups [...¹] [...²]</code> ... <code>\stoplocalsetups</code> 1 grila OPT 2 NAME
<code>\startlocalsetups \stoplocalsetups</code> * NAME
<code>\startlua ... \stoplua</code>
<code>\startluacode ... \stopluacode</code>
<code>\startluaparameterset [...]</code> ... <code>\stopluaparameterset</code> * NAME
<code>\startluasetups [...¹] [...²]</code> ... <code>\stopluasetups</code> 1 grila OPT 2 NAME
<code>\startluasetups \stopluasetups</code> * NAME
<code>\startMPclip {...}</code> ... <code>\stopMPclip</code> * NAME
<code>\startMPcode {...}</code> ... <code>\stopMPcode</code> * NAME OPT
<code>\startMPdefinitions {...}</code> ... <code>\stopMPdefinitions</code> * NAME OPT

<pre> \startMPdrawing [...] ... \stopMPdrawing * - OPT </pre>
<pre> \startMPenvironment [...] ... \stopMPenvironment * reset global + OPT </pre>
<pre> \startMPextensions {...,*...} ... \stopMPextensions * NAME OPT </pre>
<pre> \startMPinclusions [...¹] {...²} ... \stopMPinclusions 1 + OPT OPT 2 NAME </pre>
<pre> \startMPinitializations ... \stopMPinitializations </pre>
<pre> \startMPpositiongraphic {...¹} {...²,...} ... \stopMPpositiongraphic 1 NAME OPT 2 KEY </pre>
<pre> \startMPpositionmethod {...} ... \stopMPpositionmethod * NAME </pre>
<pre> \startMPrun {...} ... \stopMPrun * NAME OPT </pre>
<pre> \startmakeup [...¹] [...,²...,...] ... \stopmakeup 1 NAME OPT 2 inherits: \seteazamakeup </pre>
<pre> \startMAKEUPmakeup [...,[*]...,...] ... \stopMAKEUPmakeup * inherits: \seteazamakeup OPT instances: standard page text middle </pre>
<pre> \startmiddlemakeup [...,[*]...,...] ... \stopmiddlemakeup * inherits: \seteazamakeup OPT </pre>
<pre> \startpagemakeup [...,[*]...,...] ... \stoppagemakeup * inherits: \seteazamakeup OPT </pre>
<pre> \startstandardmakeup [...,[*]...,...] ... \stopstandardmakeup * inherits: \seteazamakeup OPT </pre>
<pre> \starttextmakeup [...,[*]...,...] ... \stoptextmakeup * inherits: \seteazamakeup OPT </pre>
<pre> \startmarginblock [...] ... \stopmarginblock * NAME OPT </pre>
<pre> \startmarkedcontent [...] ... \stopmarkedcontent * reset tot NAME OPT </pre>
<pre> \startmarkpages [...] ... \stopmarkpages * NAME </pre>
<pre> \startMATHALIGNMENT [...,[*]...,...] ... \stopMATHALIGNMENT * inherits: \setupmathalignment^{OPT} instances: align mathalignment </pre>

<pre> \startalign [...*...] ... \stopalign * inherits: \setupmathalignment </pre>
<pre> \startmathalignment [...*...] ... \stopmathalignment * inherits: \setupmathalignment^{OPT} </pre>
<pre> \startMATHCASES [...*...] ... \stopMATHCASES * inherits: \setupmathcases^{OPT} instances: cases mathcases </pre>
<pre> \startcases [...*...] ... \stopcases * inherits: \setupmathcases^{OPT} </pre>
<pre> \startmathcases [...*...] ... \stopmathcases * inherits: \setupmathcases^{OPT} </pre>
<pre> \startMATHMATRIX [...*...] ... \stopMATHMATRIX * inherits: \setupmathmatrix^{OPT} instances: matrix mathmatrix </pre>
<pre> \startmathmatrix [...*...] ... \stopmathmatrix * inherits: \setupmathmatrix^{OPT} </pre>
<pre> \startmatrix [...*...] ... \stopmatrix * inherits: \setupmathmatrix^{OPT} </pre>
<pre> \startmathmode ... \stopmathmode </pre>
<pre> \startmathstyle [...*...] ... \stopmathstyle * display text script scriptscript cramped uncramped normal impachetat mic mare NAME </pre>
<pre> \startmatrices [...*...] ... \stopmatrices * inherits: \setupmathmatrix^{OPT} </pre>
<pre> \startmaxaligned ... \stopmaxaligned </pre>
<pre> \startmediu [...] ... \stopmediu * FILE * </pre>
<pre> \startmediu *... \stopmediu * FILE * </pre>
<pre> \startmenuinteractiune [...] ... \stopmenuinteractiune * NAME </pre>
<pre> \startmiddlealigned ... \stopmiddlealigned </pre>
<pre> \startmixedcolumns [¹...] [²...] ... \stopmixedcolumns 1 NAME OPT OPT 2 inherits: \setupmixedcolumns </pre>
<pre> \startMIXEDCOLUMNS [...*...] ... \stopMIXEDCOLUMNS * inherits: \setupmixedcolumns^{OPT} instances: itemgroupcolumns boxedcolumns </pre>
<pre> \startboxedcolumns [...*...] ... \stopboxedcolumns * inherits: \setupmixedcolumns^{OPT} </pre>

<pre> \startitemgroupcolumns [...,*=...,...] ... \stopitemgroupcolumns * inherits: \setupmixedcolumns OPT </pre>
<pre> \startmode [...,*...] ... \stopmode * NAME </pre>
<pre> \startmodeset [...,¹...] {²...} ... \stopmodeset 1 NAME implicit 2 CONTENT </pre>
<pre> \startmodule [...] ... \stopmodule * FILE </pre>
<pre> \startmoduletestsection ... \stopmoduletestsection </pre>
<pre> \startmodule .*. ... \stopmodule * FILE </pre>
<pre> \startnamedsection [...¹] [...,²...,...] [...,³...,...] ... \stopnamedsection 1 ABSCHNITT 2 titlu = TEXT semncarte = TEXT marcaje = TEXT lista = TEXT referinta = REFERENCE numarpropriu = TEXT 3 KEY = VALUE </pre>
<pre> \startnamedsubformulas [...,¹...] {²...} ... \stopnamedsubformulas 1 + - REFERENCE OPT 2 TEXT </pre>
<pre> \startnarrower [...,*...] ... \stopnarrower * [-+]stanga [-+]centru^{OPT}[-+]dreapta NUMMER*stanga NUMMER*centru NUMMER*dreapta reset reverse </pre>
<pre> \startNARROWER [...,*...] ... \stopNARROWER * [-+]stanga [-+]centru^{OPT}[-+]dreapta NUMMER*stanga NUMMER*centru NUMMER*dreapta reset reverse </pre>
<pre> \startnegativ ... \stopnegativ </pre>
<pre> \startnicelyfilledbox [...,*=...,...] ... \stopnicelyfilledbox * latime = DIMENSION OPT inaltime = DIMENSION offset = DIMENSION strut = da nu </pre>
<pre> \startnointerference ... \stopnointerference </pre>
<pre> \startnotallmodes [...,*...] ... \stopnotallmodes * NAME </pre>
<pre> \startNOTE [...,*...] ... \stopNOTE * REFERENCE OPT instances: footnote endnote </pre>
<pre> \startNOTE [...,*=...,...] ... \stopNOTE * titlu = TEXT^{OPT} semncarte = TEXT lista = TEXT referinta = REFERENCE instances: footnote endnote </pre>

<pre> \startendnote [...,*...] ... \stopendnote * titlu = TEXT OPT semncarte = TEXT lista = TEXT referinta = REFERENCE </pre>
<pre> \startfootnote [...,*...] ... \stopfootnote * titlu = TEXT OPT semncarte = TEXT lista = TEXT referinta = REFERENCE </pre>
<pre> \startendnote [...,*...] ... \stopendnote * REFERENCE OPT </pre>
<pre> \startfootnote [...,*...] ... \stopfootnote * REFERENCE OPT </pre>
<pre> \startnotext ... \stopnotext </pre>
<pre> \startnotmode [...,*...] ... \stopnotmode * NAME </pre>
<pre> \startopus ... \stopopus </pre>
<pre> \startoutputstream [...*] ... \stopoutputstream * NAME </pre>
<pre> \startoverlay ... \stopoverlay </pre>
<pre> \startoverprint ... \stopoverprint </pre>
<pre> \startpagecolumns [...,*...] ... \stoppagecolumns * inherits: \setuppagecolumns^{OPT} </pre>
<pre> \startPAGECOLUMNS ... \stopPAGECOLUMNS </pre>
<pre> \startpagecolumns [...*] ... \stoppagecolumns * NAME OPT </pre>
<pre> \startpagefigure [...¹] [...,*²...] ... \stoppagefigure 1 FILE OPT 2 offset = implicit overlay niciunul DIMENSION </pre>
<pre> \startpagelayout [...*] ... \stoppagelayout * pagina paginastanga paginadreapta </pre>
<pre> \startpar [...¹] [...,*²...] ... \stoppar 1 NAME OPT OPT 2 inherits: \setupparagraph </pre>
<pre> \startparagraf [...¹] [...,*²...] ... \stopparagraf 1 NAME OPT OPT 2 inherits: \setupparagraph </pre>
<pre> \startparagraphs [...*] ... \stopparagraphs * NAME </pre>


```
\startparagraphscell ... \stopparagraphscell
```

```
\startPARAGRAPHS ... \stopPARAGRAPHS
```

```
\startPARALLEL ... \stopPARALLEL
```

```
\startparbuilder [...] ... \stopparbuilder
```

```
* implicit oneline basic NAME
```

```
\startplacefloat [...] [...] [...] ... \stopplacefloat
```

```
1 SINGULAR
2 titlu = TEXT
  semncarte = TEXT
  marcaje = TEXT
  lista = TEXT
  locatie = split totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta inmargin
  marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge
  text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber
  niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto
  pagina paginastanga paginadreapta undeva effective antet subsol
  referinta = REFERENCE
3 KEY = VALUE
```

```
\startpuneFLOAT [...] [...] ... \stoppuneFLOAT
```

```
1 titlu = TEXT
  semncarte = TEXT
  marcaje = TEXT
  lista = TEXT
  locatie = split totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta inmargin
  marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge
  text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber
  niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto
  pagina paginastanga paginadreapta undeva effective antet subsol
  referinta = REFERENCE
2 KEY = VALUE
```

instances: chemical figure table intermezzo graphic

```
\startpunechemical [...] [...] ... \stoppunechemical
```

```
1 titlu = TEXT
  semncarte = TEXT
  marcaje = TEXT
  lista = TEXT
  locatie = split totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta inmargin
  marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge
  text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber
  niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto
  pagina paginastanga paginadreapta undeva effective antet subsol
  referinta = REFERENCE
2 KEY = VALUE
```

```
\startpunefigure [...] [...] ... \stoppunefigure
```

```
1 titlu = TEXT
  semncarte = TEXT
  marcaje = TEXT
  lista = TEXT
  locatie = split totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta inmargin
  marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge
  text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber
  niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto
  pagina paginastanga paginadreapta undeva effective antet subsol
  referinta = REFERENCE
2 KEY = VALUE
```

```

\startpunegraphic [...1...2...] ... \stoppunegraphic
1 titlu = TEXT OPT OPT
  semncarte = TEXT
  marcaje = TEXT
  lista = TEXT
  locatie = split totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta inmargin
            marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge
            text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber
            niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto
            pagina paginastanga paginadreapta undeva effective antet subsol
  referinta = REFERENCE
2 KEY = VALUE

```

```

\startpuneintermezzo [...1...2...] ... \stoppuneintermezzo
1 titlu = TEXT OPT OPT
  semncarte = TEXT
  marcaje = TEXT
  lista = TEXT
  locatie = split totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta inmargin
            marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge
            text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber
            niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto
            pagina paginastanga paginadreapta undeva effective antet subsol
  referinta = REFERENCE
2 KEY = VALUE

```

```

\startpunetable [...1...2...] ... \stoppunetable
1 titlu = TEXT OPT OPT
  semncarte = TEXT
  marcaje = TEXT
  lista = TEXT
  locatie = split totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta inmargin
            marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge
            text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber
            niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto
            pagina paginastanga paginadreapta undeva effective antet subsol
  referinta = REFERENCE
2 KEY = VALUE

```

```

\startplacepairedbox [1...] [2...] ... \stopplacepairedbox
1 NAME OPT
2 inherits: \setuppairedbox

```

```

\startpunePAIREDBOX [...*...] ... \stoppunePAIREDBOX
* inherits: \setuppairedbox OPT
instances: legend

```

```

\startpunelegend [...*...] ... \stoppunelegend
* inherits: \setuppairedbox OPT

```

```

\startpositioning [1...] [2...] ... \stoppositioning
1 NAME OPT OPT
2 inherits: \setarepozitie

```

```

\startpositionoverlay {...} ... \stoppositionoverlay
* NAME

```

```

\startpositiv ... \stoppositiv

```

```

\startpostponing [...] ... \stoppostponing
* [-+]NUMBER OPT

```

```

\startpostponingnotes ... \stoppostponingnotes

```

```

\startprocessassignmentcommand [...*...] ... \stopprocessassignmentcommand
* KEY = VALUE

```

<pre> \startprocessassignmentlist [...,*=...,...] ... \stopprocessassignmentlist * KEY = VALUE </pre>
<pre> \startprocesscommacommand [...,*...,...] ... \stopprocesscommacommand * BEFEHL </pre>
<pre> \startprocesscommalist [...,*...,...] ... \stopprocesscommalist * BEFEHL </pre>
<pre> \startprodus [...*] ... \stopprodus * FILE * </pre>
<pre> \startprodus ...* ... \stopprodus * FILE * </pre>
<pre> \startproiect [...*] ... \stopproiect * FILE * </pre>
<pre> \startproiect ...* ... \stopproiect * FILE * </pre>
<pre> \startprotectedcolors ... \stopprotectedcolors </pre>
<pre> \startpublicatie [...¹...] [...²...*=...,...] ... \stoppublicatie 1 NAME OPT OPT 2 tag = REFERENCE category = TEXT k = REFERENCE t = TEXT </pre>
<pre> \startpuneformula [...,*=...,...] ... \stoppuneformula * titlu = TEXT OPT suffix = TEXT referinta = + - REFERENCE </pre>
<pre> \startpuneformula [...,*...,...] ... \stoppuneformula * + - REFERENCE OPT </pre>
<pre> \startrandomized ... \stoprandomized </pre>
<pre> \startrawsetups [...¹...] [...²...] ... \stoprawsetups 1 grila OPT 2 NAME </pre>
<pre> \startrawsetups ...* ... \stoprawsetups * NAME </pre>
<pre> \startreadingfile ... \stopreadingfile </pre>
<pre> \startregime [...*] ... \stopregime * inherits: \enableregime </pre>
<pre> \startregister [...¹...] [...²...] [...³...] [...⁴...] {...+⁵+...} 1 NAME OPT OPT 2 NAME 3 TEXT 4 TEXT PROCESSOR->TEXT 5 INDEX </pre>

```
\startreusableMPgraphic {...} {...2...} ... \stopreusableMPgraphic
```

```
1 NAME OPT  
2 KEY
```

```
\starttriglatext {...} ... \stoptriglatext
```

```
* TEXT
```

```
\starttruby [...] ... \stoptruby
```

```
* NAME
```

```
\startscript [...] ... \stopscript
```

```
* hangul hanzi nihongo ethiopic thai test NAME
```

```
\startsectionblock [...1] [...2...2...] ... \stopsectionblock
```

```
1 NAME OPT  
2 semncarte = TEXT  
inherits: \seteazablocsectiune
```

```
\startSECTIONBLOCK [...*...*...] ... \stopSECTIONBLOCK
```

```
* semncarte = TEXT OPT  
inherits: \seteazablocsectiune  
instances: frontmatter bodymatter appendices backmatter
```

```
\startappendices [...*...*...] ... \stopappendices
```

```
* semncarte = TEXT OPT  
inherits: \seteazablocsectiune
```

```
\startbackmatter [...*...*...] ... \stopbackmatter
```

```
* semncarte = TEXT OPT  
inherits: \seteazablocsectiune
```

```
\startbodymatter [...*...*...] ... \stopbodymatter
```

```
* semncarte = TEXT OPT  
inherits: \seteazablocsectiune
```

```
\startfrontmatter [...*...*...] ... \stopfrontmatter
```

```
* semncarte = TEXT OPT  
inherits: \seteazablocsectiune
```

```
\startsectionlevel [...1] [...2...2...] [...3...3...] ... \stopsectionlevel
```

```
1 NAME OPT OPT OPT  
2 titlu = TEXT  
semncarte = TEXT  
marcaje = TEXT  
lista = TEXT  
referinta = REFERENCE  
numarpropriu = TEXT  
3 KEY = VALUE
```

```
\startSECTION [...1...1...] [...2...2...] ... \stopSECTION
```

```
1 titlu = TEXT OPT OPT  
semncarte = TEXT  
marcaje = TEXT  
lista = TEXT  
referinta = REFERENCE  
numarpropriu = TEXT  
2 KEY = VALUE  
instances: part chapter section subsection subsubsection subsubsubsection  
title subject subsubject subsubsubject subsubsubsubject subsubsubsubsubject
```

```
\startchapter [...1...] [...2...] ... \stopchapter
```

```
1 titlu           = TEXTOPT
  semncarte      = TEXT
  marcaje       = TEXT
  lista         = TEXT
  referinta     = REFERENCE
  numarpropriu  = TEXT
2 KEY = VALUE
```

```
\startpart [...1...] [...2...] ... \stoppart
```

```
1 titlu           = TEXTOPT
  semncarte      = TEXT
  marcaje       = TEXT
  lista         = TEXT
  referinta     = REFERENCE
  numarpropriu  = TEXT
2 KEY = VALUE
```

```
\startsection [...1...] [...2...] ... \stopsection
```

```
1 titlu           = TEXTOPT
  semncarte      = TEXT
  marcaje       = TEXT
  lista         = TEXT
  referinta     = REFERENCE
  numarpropriu  = TEXT
2 KEY = VALUE
```

```
\startsubject [...1...] [...2...] ... \stopsubject
```

```
1 titlu           = TEXTOPT
  semncarte      = TEXT
  marcaje       = TEXT
  lista         = TEXT
  referinta     = REFERENCE
  numarpropriu  = TEXT
2 KEY = VALUE
```

```
\startsubsection [...1...] [...2...] ... \stopsubsection
```

```
1 titlu           = TEXTOPT
  semncarte      = TEXT
  marcaje       = TEXT
  lista         = TEXT
  referinta     = REFERENCE
  numarpropriu  = TEXT
2 KEY = VALUE
```

```
\startsubsubject [...1...] [...2...] ... \stopsubsubject
```

```
1 titlu           = TEXTOPT
  semncarte      = TEXT
  marcaje       = TEXT
  lista         = TEXT
  referinta     = REFERENCE
  numarpropriu  = TEXT
2 KEY = VALUE
```

```
\startsubsubsection [...1...] [...2...] ... \stopsubsubsection
```

```
1 titlu           = TEXTOPT
  semncarte      = TEXT
  marcaje       = TEXT
  lista         = TEXT
  referinta     = REFERENCE
  numarpropriu  = TEXT
2 KEY = VALUE
```

```
\startsubsubsubject [...1...] [...2...] ... \stopsubsubsubject
```

```
1 titlu           = TEXTOPT
  semncarte      = TEXT
  marcaje       = TEXT
  lista         = TEXT
  referinta     = REFERENCE
  numarpropriu  = TEXT
2 KEY = VALUE
```

`\startsubsubsection [...1...] [...2...] ... \stopsubsubsection`

1 titlu = TEXT
semncarte = TEXT
marcaje = TEXT
lista = TEXT
referinta = REFERENCE
numarpropriu = TEXT
2 KEY = VALUE

`\startsubsubsubject [...1...] [...2...] ... \stopsubsubsubject`

1 titlu = TEXT
semncarte = TEXT
marcaje = TEXT
lista = TEXT
referinta = REFERENCE
numarpropriu = TEXT
2 KEY = VALUE

`\startsubsubsubsubsection [...1...] [...2...] ... \stopsubsubsubsubsection`

1 titlu = TEXT
semncarte = TEXT
marcaje = TEXT
lista = TEXT
referinta = REFERENCE
numarpropriu = TEXT
2 KEY = VALUE

`\startsubsubsubsubsubject [...1...] [...2...] ... \stopsubsubsubsubsubject`

1 titlu = TEXT
semncarte = TEXT
marcaje = TEXT
lista = TEXT
referinta = REFERENCE
numarpropriu = TEXT
2 KEY = VALUE

`\starttitle [...1...] [...2...] ... \stoptitle`

1 titlu = TEXT
semncarte = TEXT
marcaje = TEXT
lista = TEXT
referinta = REFERENCE
numarpropriu = TEXT
2 KEY = VALUE

`\startsetups [...1] [...2] ... \stopsetups`

1 grila
2 NAME

`\startsetups * ... \stopsetups`

* NAME

`\startshift [...*] ... \stopshift`

* NAME

`\startsidebar [...1] [...2...] ... \stopsidebar`

1 NAME
2 inherits: \setupsidebar

`\startsimplecolumns [...*...] ... \stopsimplecolumns`

* inherits: \setsimplecolumnhsides

`\startspecialitem [...1] [...2...] ... \stopspecialitem`

1 element
2 REFERENCE

<pre> \startspecialitem [...] ... \stopspecialitem * sub propriu </pre>
<pre> \startspecialitem [...] {...} ... \stopspecialitem 1 sym rulat mar 2 TEXT </pre>
<pre> \startsplitformula ... \stopsplitformula </pre>
<pre> \startspread ... \stopspread </pre>
<pre> \startSTARTSTOP ... \stopSTARTSTOP </pre>
<pre> \startstaticMPfigure {...} ... \stopstaticMPfigure * NAME </pre>
<pre> \startstaticMPgraphic {...} {...²;...} ... \stopstaticMPgraphic 1 NAME 2 KEY </pre>
<pre> \STARTSTOP {...} * CONTENT </pre>
<pre> \startstrictinspectnextcharacter ... \stopstrictinspectnextcharacter </pre>
<pre> \startstructurepageregister [...] [...] [...] [...] [...] [...] 1 NAME 2 NAME 3 eticheta = NAME keys = TEXT PROCESSOR->TEXT entries = TEXT PROCESSOR->TEXT keys:1 = TEXT keys:2 = TEXT keys:3 = TEXT entries:1 = TEXT entries:2 = TEXT entries:3 = TEXT alternativ = TEXT 4 KEY = VALUE </pre>
<pre> \startstyle [...] [...] ... \stopstyle * inherits: \setupstyle </pre>
<pre> \startstyle [...] ... \stopstyle * NAME FONT </pre>
<pre> \startSTYLE ... \stopSTYLE </pre>
<pre> \startsubformulas [...] [...] ... \stopsubformulas * + - REFERENCE </pre>
<pre> \startsubjectlevel [...] [...] [...] [...] [...] [...] [...] [...] [...] [...] 1 NAME 2 titlu = TEXT semncarte = TEXT marcaje = TEXT lista = TEXT referinta = REFERENCE numarpropriu = TEXT 3 KEY = VALUE </pre>
<pre> \startsubsentence ... \stopsubsentence </pre>

<pre> \startsubsoltable [...¹] ... \stopsubsoltable * NAME </pre>
<pre> \startsubstack ... \stopsubstack </pre>
<pre> \startsuspendat [...¹...²] {...} ... \stopsuspendat 1 distanta = DIMENSION OPT n = NUMBER locatie = stanga dreapta 2 CONTENT </pre>
<pre> \startsuspendat [...¹] {...²} ... \stopsuspendat 1 stanga dreapta OPT 2 CONTENT </pre>
<pre> \startsymbolset [...¹] [...²...³] ... \stopsymbolset 1 NAME 2 font = FONT </pre>
<pre> \startTABLE [...[*]...[*]] ... \stopTABLE * inherits: \setupTABLE OPT </pre>
<pre> \startTABLEbody [...[*]...[*]] ... \stopTABLEbody * inherits: \setupTABLE OPT </pre>
<pre> \startTABLEfoot [...[*]...[*]] ... \stopTABLEfoot * inherits: \setupTABLE OPT </pre>
<pre> \startTABLEhead [...[*]...[*]] ... \stopTABLEhead * inherits: \setupTABLE OPT </pre>
<pre> \startTABLEnext [...[*]...[*]] ... \stopTABLEnext * inherits: \setupTABLE OPT </pre>
<pre> \starttabellele [...] ... \stoptabellele * TEMPLATE </pre>
<pre> \starttabellele [...] ... \stoptabellele * NAME </pre>
<pre> \starttabelul [...¹] [...²...³] ... \stoptabelul 1 TEMPLATE 2 inherits: \seteazatabele </pre>
<pre> \starttabelul [...¹] [...²...³] ... \stoptabelul 1 NAME 2 inherits: \seteazatabele </pre>
<pre> \starttabulate [...¹/...²...³] ... \stoptabulate 1 TEMPLATE OPT OPT 2 inherits: \seteazatabulatori </pre>
<pre> \starttabulatehead [...] ... \stoptabulatehead * NAME OPT </pre>
<pre> \starttabulatetail [...] ... \stoptabulatetail * NAME OPT </pre>

`\startTABULATE [..1.] [..,..2..,..] ... \stopTABULATE`

1 NAME OPT OPT
2 inherits: \seteazatabulatori
instances: legend fact

`\startfact [..1.] [..,..2..,..] ... \stopfact`

1 NAME OPT OPT
2 inherits: \seteazatabulatori

`\startlegend [..1.] [..,..2..,..] ... \stoplegend`

1 NAME OPT OPT
2 inherits: \seteazatabulatori

`\startTABULATION [..1.] [..,..2..,..] ... \stopTABULATION`

1 NAME OPT OPT
2 inherits: \setuptabulation

`\starttexcode ... \stoptexcode`

`\starttexdefinition 1 2 3 4 5 6 7 ... \stoptexdefinition`

1 spaces nospaces OPT OPT OPT OPT OPT OPT
2 global
3 unexpanded
4 expanded
5 singleempty doubleempty tripleempty quadrupleempty quintupleempty sextupleempty singleargument doubleargument
tripleargument quadrupleargument quintupleargument sextupleargument
6 NAME
7 TEMPLATE

`\starttext ... \stoptext`

`\starttextajutator [.*] ... \stoptextajutator`

* REFERENCE OPT

`\starttextbackground [..1.] [..,..2..,..] ... \stoptextbackground`

1 NAME OPT
2 inherits: \setuptextbackground

`\starttextbackgroundmanual ... \stoptextbackgroundmanual`

`\startTEXTBACKGROUND [..,..*..,..] ... \stopTEXTBACKGROUND`

* inherits: \setuptextbackground^{OPT}

`\starttextcolor [.*] ... \stoptextcolor`

* COLOR

`\starttextcolorintent ... \stoptextcolorintent`

`\startLABELtext [..1.] [..2.] ... \stopLABELtext`

1 SPRACHE OPT
2 KEY
instances: head label mathlabel taglabel unit operator prefix suffix btxlabel

`\startbtxlabeltext [..1.] [..2.] ... \stopbtxlabeltext`

1 SPRACHE OPT
2 KEY

`\startheadtext [..1.] [..2.] ... \stoptheadtext`

1 SPRACHE OPT
2 KEY

`\startlabeltext [...]1 [...]2 ... \stoplabeltext`

1 SPRACHE OPT
2 KEY

`\startmathlabeltext [...]1 [...]2 ... \stopmathlabeltext`

1 SPRACHE OPT
2 KEY

`\startoperatortext [...]1 [...]2 ... \stopoperatortext`

1 SPRACHE OPT
2 KEY

`\startprefixtext [...]1 [...]2 ... \stopprefixtext`

1 SPRACHE OPT
2 KEY

`\startsuffixtext [...]1 [...]2 ... \stopsuffixtext`

1 SPRACHE OPT
2 KEY

`\starttaglabeltext [...]1 [...]2 ... \stoptaglabeltext`

1 SPRACHE OPT
2 KEY

`\startunittext [...]1 [...]2 ... \stopunittext`

1 SPRACHE OPT
2 KEY

`\starttextflow [...]* ... \stoptextflow`

* NAME

`\startFRAMEDTEXT [...]1 [...,2...]2 ... \stopFRAMEDTEXT`

1 stanga dreapta centr^Phiciunul OPT
2 inherits: \setupframedtext
instances: framedtext

`\startframedtext [...]1 [...,2...]2 ... \stopframedtext`

1 stanga dreapta centr^Phiciunul OPT
2 inherits: \setupframedtext

`\starttitlu [...]1,... {2...} ... \stoptitlu`

1 REFERENCE OPT
2 TEXT

`\starttokens [...]* ... \stoptokens`

* NAME

`\starttransparent [...]* ... \stoptransparent`

* COLOR

`\starttypescript [...]1,... [...]2,... [...]3,... ... \stoptypescript`

1 serif sans mono math hand^writing calligraphy OPT
2 NAME
3 size nume

`\starttypescriptcollection [...]* ... \stoptypescriptcollection`

* NAME

`\startTYPING [...]* ... \stopTYPING`

* inherits: \seteazaty^Ping
instances: typing LUA MP PARSEDXML TEX XML

```
\startTYPING [...,*...] ... \stopTYPING
*   continuu          OPT
instances: typing LUA MP PARSEDXML TEX XML
```

```
\startLUA [...,*...] ... \stopLUA
*   continuu          OPT
```

```
\startMP [...,*...] ... \stopMP
*   continuu          OPT
```

```
\startPARSEDXML [...,*...] ... \stopPARSEDXML
*   continuu          OPT
```

```
\startTEX [...,*...] ... \stopTEX
*   continuu          OPT
```

```
\starttyping [...,*...] ... \stoptyping
*   continuu          OPT
```

```
\startXML [...,*...] ... \stopXML
*   continuu          OPT
```

```
\startLUA [...,*...] ... \stopLUA
*   inherits: \setea2atyping
```

```
\startMP [...,*...] ... \stopMP
*   inherits: \setea2atyping
```

```
\startPARSEDXML [...,*...] ... \stopPARSEDXML
*   inherits: \setea2atyping
```

```
\startTEX [...,*...] ... \stopTEX
*   inherits: \setea2atyping
```

```
\starttyping [...,*...] ... \stoptyping
*   inherits: \setea2atyping
```

```
\startXML [...,*...] ... \stopXML
*   inherits: \setea2atyping
```

```
\startuniqueMPgraphic {...1} {...2,...} ... \stopuniqueMPgraphic
1  NAME          OPT
2  KEY
```

```
\startuniqueMPpagegraphic {...1} {...2,...} ... \stopuniqueMPpagegraphic
1  NAME          OPT
2  KEY
```

```
\startusableMPgraphic {...1} {...2,...} ... \stopusableMPgraphic
1  NAME          OPT
2  KEY
```

```
\startuseMPgraphic {...1} {...2,...} ... \stopuseMPgraphic
1  NAME          OPT
2  KEY
```

```
\startusemathstyleparameter \.* ... \stopusemathstyleparameter
*   CSNAME
```

<pre> \startusingbtxs specification [...] ... \stopusingbtxs specification * NAME </pre>
<pre> \startvboxregister ... \stopvboxregister * CSNAME NUMBER </pre>
<pre> \startvboxtohbox ... \stopvboxtohbox </pre>
<pre> \startvboxtohboxseparator ... \stopvboxtohboxseparator </pre>
<pre> \startviewerlayer [...] ... \stopviewerlayer * NAME </pre>
<pre> \startVIEWERLAYER ... \stopVIEWERLAYER </pre>
<pre> \startvtopregister ... \stopvtopregister * CSNAME NUMBER </pre>
<pre> \startxcell [...] [...] ... \stopxcell 1 NAME OPT OPT 2 nx = NUMBER ny = NUMBER nc = NUMBER nr = NUMBER inherits: \setupxtable </pre>
<pre> \startxcellgroup [...] [...] ... \stopxcellgroup 1 NAME OPT OPT 2 inherits: \setupxtable </pre>
<pre> \startxcolumn [...] [...] ... \stopxcolumn 1 NAME OPT OPT 2 inherits: \setupxtable </pre>
<pre> \startxgroup [...] [...] ... \stopxgroup 1 NAME OPT OPT 2 inherits: \setupxtable </pre>
<pre> \startxmldisplayverbatim [...] ... \stopxmldisplayverbatim * NAME </pre>
<pre> \startxmlinlineverbatim [...] ... \stopxmlinlineverbatim * NAME </pre>
<pre> \startxmlraw ... \stopxmlraw </pre>
<pre> \startxmlsetups [...] [...] ... \stopxmlsetups 1 grila OPT 2 NAME </pre>
<pre> \startxmlsetups ... \stopxmlsetups * NAME </pre>
<pre> \startxrow [...] [...] ... \stopxrow 1 NAME OPT OPT 2 inherits: \setupxtable </pre>

<pre> \startxrowgroup [...¹.] [...²...²...] ... \stopxrowgroup 1 NAME OPT OPT 2 inherits: \setupxtable </pre>
<pre> \startxtable [...[*]...[*]...] ... \stopxtable * inherits: \setupxtable^{OPT} </pre>
<pre> \startxtablebody [...[*]...[*]...] ... \stopxtablebody * inherits: \setupxtable OPT </pre>
<pre> \startxtablebody [...[*].] ... \stopxtablebody * NAME OPT </pre>
<pre> \startxtablefoot [...[*]...[*]...] ... \stopxtablefoot * inherits: \setupxtable OPT </pre>
<pre> \startxtablefoot [...[*].] ... \stopxtablefoot * NAME OPT </pre>
<pre> \startxtablehead [...[*]...[*]...] ... \stopxtablehead * inherits: \setupxtable OPT </pre>
<pre> \startxtablehead [...[*].] ... \stopxtablehead * NAME OPT </pre>
<pre> \startxtablenext [...[*]...[*]...] ... \stopxtablenext * inherits: \setupxtable OPT </pre>
<pre> \startxtablenext [...[*].] ... \stopxtablenext * NAME OPT </pre>
<pre> \startXTABLE [...[*]...[*]...] ... \stopXTABLE * inherits: \setupxtable^{OPT} </pre>
<pre> \startxtable [...[*].] ... \stopxtable * NAME OPT </pre>
<pre> \stivacampuri [...¹.] [...²...².] [...³...³...] 1 NAME OPT OPT 2 NAME 3 inherits: \setupfieldcategory </pre>
<pre> \stopLINENOTE [...[*].] * REFERENCE instances: linenote </pre>
<pre> \stoplinenote [...[*].] * REFERENCE </pre>
<pre> \stoplinie [...[*].] * REFERENCE </pre>
<pre> \stopregister [...¹.] [...².] 1 NAME 2 NAME </pre>

<pre> \stopstructurepageregister [..] [..] 1 NAME 2 NAME </pre>
<pre> \strictdoifelsenextoptional {..} {..} 1 TRUE 2 FALSE </pre>
<pre> \strictdoifnextoptionalelse {..} {..} 1 TRUE 2 FALSE </pre>
<pre> \stripcharacter .¹. \from .². \to \.³. 1 CHARACTER 2 TEXT 3 CSNAME </pre>
<pre> \strippedcsname *.. * CSNAME </pre>
<pre> \strippedcsname *.. * TEXT </pre>
<pre> \stripspaces \from .¹. \to \.². 1 TEXT 2 CSNAME </pre>
<pre> \structurelistuservariable {*..} * KEY </pre>
<pre> \structurenumber </pre>
<pre> \structuretitle </pre>
<pre> \structureuservariable {*..} * KEY </pre>
<pre> \structurevariable {*..} * KEY </pre>
<pre> \strut </pre>
<pre> \strutdp </pre>
<pre> \strutgap </pre>
<pre> \strutht </pre>
<pre> \struthtdp </pre>
<pre> \struttedbox {*..} * CONTENT </pre>
<pre> \strutwd </pre>
<pre> \style [..,..¹..,..] {..} 1 inherits: \setupstyle 2 TEXT </pre>

<pre>\styleinstance [...] * NAME</pre>
<pre>\style [...] {...} 1 NAME FONT 2 TEXT</pre>
<pre>\STYLE {...} * TEXT</pre>
<pre>\subpagenumber</pre>
<pre>\subsentence {...} * CONTENT</pre>
<pre>\substituteincommalist {...} {...} \... 1 TEXT 2 TEXT 3 CSNAME</pre>
<pre>\subtractfeature [...] * NAME</pre>
<pre>\subtractfeature {...} * NAME</pre>
<pre>\swapcounts \... \... 1 CSNAME 2 CSNAME</pre>
<pre>\swapdimens \... \... 1 CSNAME 2 CSNAME</pre>
<pre>\swapface</pre>
<pre>\swapmacros \... \... 1 CSNAME 2 CSNAME</pre>
<pre>\swaptypface</pre>
<pre>\switchstyleonly [...] * rm ss tt hw cg roman serif regular sans sansserif suport type teletype mono scrismanual caligrafic</pre>
<pre>\switchstyleonly \... * CSNAME</pre>
<pre>\switchtocolour [...] * COLOR</pre>
<pre>\switchtointerlinespace [...,¹...] [...,²...,...] 1 NAME OPT 2 inherits: \seteazaspatiuinterliniar</pre>
<pre>\switchtointerlinespace [...,*...] * on dezactivat reset auto mic medfũ mare NUMMER DIMENSION</pre>

<code>\TABLE</code>
<code>\TaBlE</code>
<code>\TEX</code>
<code>\TeX</code>
<code>\TheNormalizedFontSize</code>
<code>\TransparencyHack</code>
<code>\tabulateautoline</code>
<code>\tabulateautorule</code>
<code>\tabulateline</code>
<code>\tabulaterule</code>
<code>\taggedctxcommand {¹...}</code> * BEFEHL
<code>\taggedlabeltexts {¹...} {²...} {³...}</code> 1 NAME 2 NAME 3 CONTENT
<code>\tbox {¹...}</code> * CONTENT
<code>\testandsplitstring ¹.. \at ².. \to \³.. \and \⁴..</code> 1 TEXT 2 TEXT 3 CSNAME 4 CSNAME
<code>\testcolumn [¹..] [²..]</code> 1 NUMMER OPT 2 DIMENSION
<code>\testfeature {¹...} {²...}</code> 1 NUMMER 2 CONTENT
<code>\testfeatureonce {¹...} {²...}</code> 1 NUMMER 2 CONTENT
<code>\testpage [¹..] [²..]</code> 1 NUMMER OPT 2 DIMENSION
<code>\testpageonly [¹..] [²..]</code> 1 NUMMER OPT 2 DIMENSION

<pre> \testpagesync [¹...] [²...] 1 NUMBER OPT 2 DIMENSION </pre>
<pre> \testtokens [...] * NAME </pre>
<pre> \tex {...} * CONTENT </pre>
<pre> \texdefinition {...} * NAME </pre>
<pre> \texsetup {...} * NAME </pre>
<pre> \textajutator [¹...] {...} {...} 1 REFERENCE OPT 2 TEXT 3 TEXT </pre>
<pre> \TEXTBACKGROUND {...} * CONTENT </pre>
<pre> \textcitation [...,¹...,...] [²...] 1 referinta = REFERENCE alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear inainte = BEFEHL dupa = BEFEHL stanga = BEFEHL dreapta = BEFEHL inherits: \setupbtx 2 REFERENCE </pre>
<pre> \textcitation [¹...] [²...] 1 implicit category^{OPT}entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear 2 REFERENCE </pre>
<pre> \textcitation [...,¹...,...] [...,²...,...] 1 referinta = REFERENCE alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear inainte = BEFEHL dupa = BEFEHL stanga = BEFEHL dreapta = BEFEHL inherits: \setupbtx 2 KEY = VALUE </pre>
<pre> \textcite [...,¹...,...] [²...] 1 referinta = REFERENCE alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear inainte = BEFEHL dupa = BEFEHL stanga = BEFEHL dreapta = BEFEHL inherits: \setupbtx 2 REFERENCE </pre>
<pre> \textcite [¹...] [²...] 1 implicit category^{OPT}entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear 2 REFERENCE </pre>

```

\textcite [...1...2...] [...2...1...]
1 referinta = REFERENCE
  alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
              authoryear
  inainte   = BEFEHL
  dupa      = BEFEHL
  stanga    = BEFEHL
  dreapta   = BEFEHL
  inherits: \setupbtx
2 KEY = VALUE

```

```
\textcontrolspace
```

```

\LABELtext {...}
* KEY
instances: head label mathlabel taglabel unit operator prefix suffix btxlabel

```

```

\btxlabeltext {...}
* KEY

```

```

\headtext {...}
* KEY

```

```

\labeltext {...}
* KEY

```

```

\mathlabeltext {...}
* KEY

```

```

\operatortext {...}
* KEY

```

```

\prefixtext {...}
* KEY

```

```

\suffixtext {...}
* KEY

```

```

\taglabeltext {...}
* KEY

```

```

\unittext {...}
* KEY

```

```

\textflowcollector {...}
* NAME

```

```

\FRAMEDEXT [...1...2...] {...2}
1 inherits: \setupframedtext
2 CONTENT
instances: framedtext

```

```

\framedtext [...1...2...] {...2}
1 inherits: \setupframedtext
2 CONTENT

```

```

\textmath {...}
* CONTENT

```

```
\textminus
```

`\textormathchar {...}`

* NUMBER

`\textormathchars {...}`

* CHARACTER

`\textplus`

`\textumplere [...1...2...3...] {...} {...}`

1 inherits: \seteazarig¹leumplere OPT OPT
2 TEXT
3 TEXT

`\textvisiblespace`

`\thainumerals {...}`

* NUMBER

`\thefirstcharacter {...}`

* TEXT

`\thenormalizedbodyfontsize {...}`

* DIMENSION

`\theremainingcharacters {...}`

* TEXT

`\thickspace`

`\thinspace`

`\thirdoffivearguments {...} {...} {...} {...} {...}`

1 TEXT
2 TEXT
3 TEXT
4 TEXT
5 TEXT

`\thirdoffourarguments {...} {...} {...} {...}`

1 TEXT
2 TEXT
3 TEXT
4 TEXT

`\thirdofsixarguments {...} {...} {...} {...} {...} {...}`

1 TEXT
2 TEXT
3 TEXT
4 TEXT
5 TEXT
6 TEXT

`\thirdofthreearguments {...} {...} {...}`

1 TEXT
2 TEXT
3 TEXT

`\thirdofthreeunexpanded {...} {...} {...}`

1 TEXT
2 TEXT
3 TEXT

`\threedigitrounding {...}`

* NUMBER

`\tibetannumerals {...}`

* NUMBER

`\tightlayer [...]`

* NAME

`\tilde {...}`

* CHARACTER

`\tinyfont`

`\tlap {...}`

* CONTENT

`\tochar {...}`

* e:NAME x:NUMBER d:NUMBER s:NUMBER i:NUMBER n:NAME c:NAME u:NAME a:NAME

`\tolinenote [...]`

* REFERENCE

`\TOOLTIP [...1...2...3...] {...} {...}`

1 inherits: \setup^{OPT}tooltip

2 TEXT

3 TEXT

instances: tooltip

`\TOOLTIP [...1] {...} {...}`

1 stanga cent^{OPT}u dreapta

2 TEXT

3 TEXT

instances: tooltip

`\tooltip [...1] {...} {...}`

1 stanga cent^{OPT}u dreapta

2 TEXT

3 TEXT

`\tooltip [...1...2...3...] {...} {...}`

1 inherits: \setup^{OPT}tooltip

2 TEXT

3 TEXT

`\topbox {...}`

* CONTENT

`\topleftbox {...}`

* CONTENT

`\toplinebox {...}`

* CONTENT

`\toprightbox {...}`

* CONTENT

`\topskippedbox {...}`

* CONTENT

<code>\tracecatcodetables</code>
<code>\tracedfontname {...}</code> * FONT
<code>\traceoutputroutines</code>
<code>\tracepositions</code>
<code>\traduce [...¹...²...]</code> * SPRACHE = TEX ^P T
<code>\transparencycomponents {...}</code> * COLOR
<code>\transparent [...¹] {...²}</code> 1 COLOR 2 CONTENT
<code>\trecilafonttext [...[*]...]</code> * inherits: \seteazafonttext
<code>\triplebond</code>
<code>\truefilename {...}</code> * FILE
<code>\truefontname {...}</code> * FONT
<code>\ttraggedright</code>
<code>\twodigitrounding {...}</code> * NUMMER
<code>\tx</code>
<code>\txx</code>
<code>\typ [...¹...²...]</code> 1 inherits: $\text{\textcircled{R}}\text{\textcircled{E}}\text{\textcircled{T}}\text{\textcircled{S}}\text{\textcircled{E}}\text{\textcircled{T}}\text{\textcircled{E}}\text{\textcircled{A}}\text{\textcircled{Z}}\text{\textcircled{A}}\text{\textcircled{T}}\text{\textcircled{Y}}\text{\textcircled{P}}\text{\textcircled{E}}$ 2 CONTENT
<code>\type [...¹...²...]</code> 1 inherits: $\text{\textcircled{R}}\text{\textcircled{E}}\text{\textcircled{T}}\text{\textcircled{S}}\text{\textcircled{E}}\text{\textcircled{T}}\text{\textcircled{E}}\text{\textcircled{A}}\text{\textcircled{Z}}\text{\textcircled{A}}\text{\textcircled{T}}\text{\textcircled{Y}}\text{\textcircled{P}}\text{\textcircled{E}}$ 2 CONTENT
<code>\typedefinedbuffer [...¹] [...²...³...]</code> 1 BUFFER 2 inherits: \seteazatyping
<code>\typeface</code>
<code>\typefile [...¹] [...²...³...]</code> 1 NAME OPT 2 inherits: \seteazatyping 3 FILE

`\typeinlinebuffer [...1,...] [...2,...]`
1 BUFFER OPT OPT
2 inherits: \seteazatype

`\typescriptone`

`\typescriptprefix {...}`
* NAME

`\typescriptthree`

`\typescripttwo`

`\typesetbuffer [...1] [...2,...]`
1 * BUFFER OPT OPT
2 inherits: \setupeexternalfigure

`\typesetfile [...1] [...2] [...3,...]`
1 NAME FILE OPT OPT
2 FILE TEXT
3 inherits: \setupeexternalfigure

`\type [...1,...] <<...2>>`
1 inherits: \seteazatype
2 ANGLES

`\TYPE [...1,...] {...2}`
1 inherits: \seteazatype
2 CONTENT

`\TYPE [...1,...] <<...2>>`
1 inherits: \seteazatype
2 ANGLES

`\typ [...1,...] <<...2>>`
1 inherits: \seteazatype
2 ANGLES

`\uconvertnumber {...1} {...2}`
1 inherits: \convertestenumar
2 NUMMER

`\uedcatcodecommand \...1 ...2 {...3}`
1 CSNAME
2 CHARACTER NUMBER
3 BEFEHL

`\ultimasubpagina`

`\undefinevalue {...}`
* NAME

`\undepthed {...}`
* CONTENT

`\underset {...1} {...2}`
1 TEXT
2 TEXT

<pre> \undeva {...} {...} [...] 1 TEXT 2 TEXT 3 REFERENCE </pre>
<pre> \undoassign [...] [...] 1 TEXT 2 KEY = VALUE </pre>
<pre> \unexpandeddocumentvariable {...} * KEY </pre>
<pre> \unhhbox ... \with {...} 1 CSNAME NUMBER 2 BEFEHL </pre>
<pre> \unihex {...} * NUMBER </pre>
<pre> \uniqueMPgraphic {...} {..., ...²..., ...} 1 NAME OPT 2 KEY = VALUE </pre>
<pre> \uniqueMPpagegraphic {...} {..., ...²..., ...} 1 NAME OPT 2 KEY = VALUE </pre>
<pre> \UNIT {...} * CONTENT instances: unit </pre>
<pre> \unit {...} * CONTENT </pre>
<pre> \unprotect ... \protect </pre>
<pre> \unprotected ... \par * CONTENT </pre>
<pre> \unregisterhyphenationpattern [...] [...] 1 SPRACHE OPT 2 TEXT </pre>
<pre> \unspaceafter \... {...} 1 CSNAME 2 TEXT </pre>
<pre> \unspaceargument ... \to ... 1 TEXT 2 CSNAME </pre>
<pre> \unspaced {...} * TEXT </pre>
<pre> \unspacestring ... \to ... 1 TEXT 2 CSNAME </pre>

<pre>\untexargument {...} \to ... 1 TEXT 2 CSNAME</pre>
<pre>\untexcommand {...} \to ... 1 CSNAME 2 CSNAME</pre>
<pre>\uppercased {...} * TEXT</pre>
<pre>\uppercasestring ... \to ... 1 TEXT 2 CSNAME</pre>
<pre>\upperlefthdoubleninequote</pre>
<pre>\upperlefthdoublesixquote</pre>
<pre>\upperleftsingleninequote</pre>
<pre>\upperleftsinglesixquote</pre>
<pre>\upperrighthdoubleninequote</pre>
<pre>\upperrighthdoublesixquote</pre>
<pre>\upperrightsingleninequote</pre>
<pre>\upperrightsinglesixquote</pre>
<pre>\url [...] * NAME</pre>
<pre>\urmatoareasubpagina</pre>
<pre>\usealignparameter *... * CSNAME</pre>
<pre>\useblankparameter *... * CSNAME</pre>
<pre>\usebodyfont [...*...] * inherits: \seteazafonttext</pre>
<pre>\usebodyfontparameter *... * CSNAME</pre>
<pre>\usebtxdataset [...¹] [...²] [...³...³...] 1 NAME OPT OPT 2 FILE 3 specification = NAME</pre>
<pre>\usebtdefinitions [...*] * FILE</pre>

<pre>\usecitation [...] * REFERENCE</pre>
<pre>\usecitation {...} * REFERENCE</pre>
<pre>\usecolors [...] * FILE</pre>
<pre>\usecomponent [...] * FILE</pre>
<pre>\usedummycolorparameter {...} * KEY</pre>
<pre>\usedummystyleandcolor {...} {...} 1 KEY 2 KEY</pre>
<pre>\usedummystyleparameter {...} * KEY</pre>
<pre>\useenvironment [...] * FILE</pre>
<pre>\useexternalrendering [...] [...] [...] [...] 1 NAME 2 NAME 3 FILE 4 auto embed</pre>
<pre>\usefigurebase [...] * reset FILE</pre>
<pre>\usefile [...] [...] [...] 1 NAME OPT 2 FILE 3 TEXT</pre>
<pre>\usegridparameter *... * CSNAME</pre>
<pre>\useindentingparameter *... * CSNAME</pre>
<pre>\useindentnextparameter *... * CSNAME</pre>
<pre>\useinterlinespaceparameter *... * CSNAME</pre>
<pre>\uselanguageparameter *... * CSNAME</pre>
<pre>\uselua module [...] * FILE</pre>
<pre>\useMPenvironmentbuffer [...] * NAME</pre>

<pre> \useMPgraphic {...} {...²...} 1 NAME 2 KEY = VALUE </pre>
<pre> \useMPlibrary [...] * FILE </pre>
<pre> \useMPrun {...} {...} 1 NAME 2 NUMBER </pre>
<pre> \useMPvariables [...] [...²...] 1 NAME 2 KEY </pre>
<pre> \usemathstyleparameter *.. * CSNAME </pre>
<pre> \useproduct [...] * FILE </pre>
<pre> \useprofileparameter *.. * CSNAME </pre>
<pre> \useproject [...] * FILE </pre>
<pre> \userferenceparameter *.. * CSNAME </pre>
<pre> \userpagenumber </pre>
<pre> \usetupsparameter *.. * CSNAME </pre>
<pre> \usestaticMPfigure [...¹...] [...²] 1 inherits: \setupscale OPT 2 NAME </pre>
<pre> \usesubpath [...[*]...] * PATH </pre>
<pre> \usetexmodule [...¹] [...²...] [...³...] 1 m p s x t OPT OPT 2 FILE 3 KEY = VALUE </pre>
<pre> \usetypescript [...¹] [...²] [...³] 1 serif sans mono^{OPT} math^{OPT} handwriting^{OPT} calligraphy casual tot 2 NAME fallback implicit dtp simple 3 size nume </pre>
<pre> \usetypescriptfile [...] * reset FILE </pre>
<pre> \usezipfile [...¹] [...²] 1 FILE OPT 2 FILE </pre>

<p><code>\utfchar {...}</code> * NUMBER</p>
<p><code>\utflower {...}</code> * TEXT</p>
<p><code>\utfupper {...}</code> * TEXT</p>
<p><code>\utilityregisterlength</code></p>
<p><code>\VerboseNumber {...}</code> * NUMBER</p>
<p><code>\valoareculoare {...}</code> * COLOR</p>
<p><code>\vboxreference [...¹;...²] {...}</code> 1 REFERENCE 2 CONTENT</p>
<p><code>\vec {...}</code> * CHARACTER</p>
<p><code>\verbatim {...}</code> * CONTENT</p>
<p><code>\verbatimstring {...}</code> * CONTENT</p>
<p><code>\verbosenumber {...}</code> * NUMBER</p>
<p><code>\versiune [...]</code> * concept fisier temporar final NAME</p>
<p><code>\verticalgrowingbar [...[*]...]</code> * inherits: \setuppositionbar</p>
<p><code>\verticalpositionbar [...[*]...]</code> * inherits: \setuppositionbar</p>
<p><code>\veryraggedcenter</code></p>
<p><code>\veryraggedleft</code></p>
<p><code>\veryraggedright</code></p>
<p><code>\vglue ...</code> * DIMENSION</p>
<p><code>\viewerlayer [...¹] {...²}</code> 1 NAME 2 CONTENT</p>
<p><code>\vl [...]</code> * NUMBER</p>

<pre>\vphantom {...} * CONTENT</pre>
<pre>\vpos {...} {...} 1 NAME 2 CONTENT</pre>
<pre>\vsmash {...} * CONTENT</pre>
<pre>\vsmashbox ... * CSNAME NUMBER</pre>
<pre>\vsmashed {...} * CONTENT</pre>
<pre>\vspace [...] [...] 1 NAME OPT OPT 2 NAME</pre>
<pre>\vspacing [...]*...] * preferinta acesipagina max fortat enable dezactivat faraalb impachetat inapot overlay totdeauna weak strong implicit inainte intre dupa fixat flexibil niciunul mic mediu mare linie jumatatelinie quarterline formula alb inaltime adancime standard NUMBER*mic NUMBER*mediu NUMBER*mare NUMBER*linie NUMBER*jumatatelinie NUMBER*quarterline NUMBER*formula NUMBER*alb NUMBER*inaltime NUMBER*adancime category:NUMBER order:NUMBER penalty:NUMBER DIMENSION NAME</pre>
<pre>\WidthSpanningText {...} {...} {...} 1 TEXT 2 DIMENSION 3 FONT</pre>
<pre>\wdofstring {...} * TEXT</pre>
<pre>\widthofstring {...} * TEXT</pre>
<pre>\widthspanningtext {...} {...} {...} 1 TEXT 2 DIMENSION 3 FONT</pre>
<pre>\withoutpt {...} * DIMENSION</pre>
<pre>\words {...} * TEXT</pre>
<pre>\wordtonumber {...} {...} 1 unu doi trei patru cinci 2 TEXT</pre>
<pre>\writedatatolist [...] [...] [...] [...] 1 LISTE OPT 2 inherits: \seteazalista 3 KEY = VALUE</pre>
<pre>\writestatus {...} {...} 1 TEXT 2 TEXT</pre>

<code>\XETEX</code>
<code>\XeTeX</code>
<code>\xdefconvertedargument \¹... {²...}</code> 1 CSNAME 2 TEXT
<code>\xmladdindex {[*]...}</code> * NODE
<code>\xmlafterdocumentsetup {¹...} {²...} {³...}</code> 1 NAME 2 SETUP 3 SETUP
<code>\xmlafterssetup {¹...} {²...}</code> 1 SETUP 2 SETUP
<code>\xmlall {¹...} {²...}</code> 1 NODE 2 LPATH
<code>\xmlappenddocumentsetup {¹...} {²...}</code> 1 NAME 2 SETUP
<code>\xmlappendsetup {[*]...}</code> * SETUP
<code>\xmlapplyselectors {[*]...}</code> * NODE
<code>\xmlatt {¹...} {²...}</code> 1 NODE 2 NAME
<code>\xmlattdef {¹...} {²...} {³...}</code> 1 NODE 2 NAME 3 TEXT
<code>\xmlattribute {¹...} {²...} {³...}</code> 1 NODE 2 LPATH 3 NAME
<code>\xmlattributedef {¹...} {²...} {³...} {⁴...}</code> 1 NODE 2 LPATH 3 NAME 4 TEXT
<code>\xmlbadinclusions {[*]...}</code> * NODE
<code>\xmlbeforedocumentsetup {¹...} {²...} {³...}</code> 1 NAME 2 SETUP 3 SETUP

<pre> \xmlbeforesetup {...} {...} 1 SETUP 2 SETUP </pre>
<pre> \xmlchainatt {...} {...} 1 NODE 2 NAME </pre>
<pre> \xmlchainattdef {...} {...} {...} 1 NODE 2 NAME 3 TEXT </pre>
<pre> \xmlchecknamespace {...} {...} 1 NODE 2 NAME </pre>
<pre> \xmlcommand {...} {...} {...} 1 NODE 2 LPATH 3 XMLSETUP </pre>
<pre> \xmlconcat {...} {...} {...} 1 NODE 2 LPATH 3 TEXT </pre>
<pre> \xmlconcatrange {...} {...} {...} {...} {...} 1 NODE 2 LPATH 3 TEXT 4 FIRST 5 LAST </pre>
<pre> \xmlcontext {...} {...} 1 NODE 2 LPATH </pre>
<pre> \xmlcount {...} * NODE </pre>
<pre> \xmldefaulttotext {...} * NODE </pre>
<pre> \xmldirectives {...} * NODE </pre>
<pre> \xmldirectivesafter {...} * NODE </pre>
<pre> \xmldirectivesbefore {...} * NODE </pre>
<pre> \xmldisplayverbatim {...} * NODE </pre>
<pre> \xmldoif {...} {...} {...} 1 NODE 2 LPATH 3 TRUE </pre>

```
\xmldoifatt {...} {...}
```

```
1 NODE  
2 TRUE
```

```
\xmldoifelse {...} {...} {...} {...}
```

```
1 NODE  
2 LPATH  
3 TRUE  
4 FALSE
```

```
\xmldoifelseatt {...} {...} {...}
```

```
1 NODE  
2 TRUE  
3 FALSE
```

```
\xmldoifelseempty {...} {...} {...} {...}
```

```
1 NODE  
2 LPATH  
3 TRUE  
4 FALSE
```

```
\xmldoifelseselfempty {...} {...} {...}
```

```
1 NODE  
2 TRUE  
3 FALSE
```

```
\xmldoifelsestext {...} {...} {...} {...}
```

```
1 NODE  
2 LPATH  
3 TRUE  
4 FALSE
```

```
\xmldoifelsevalue {...} {...} {...} {...}
```

```
1 CATEGORY  
2 NAME  
3 TRUE  
4 FALSE
```

```
\xmldoifnot {...} {...} {...}
```

```
1 NODE  
2 LPATH  
3 TRUE
```

```
\xmldoifnotatt {...} {...}
```

```
1 NODE  
2 TRUE
```

```
\xmldoifnotselfempty {...} {...}
```

```
1 NODE  
2 TRUE
```

```
\xmldoifnottext {...} {...} {...}
```

```
1 NODE  
2 LPATH  
3 TRUE
```

```
\xmldoifselfempty {...} {...}
```

```
1 NODE  
2 TRUE
```

```
\xmldoiftext {...} {...} {...}
```

```
1 NODE  
2 LPATH  
3 TRUE
```


<pre> \xmlelement {...} {...} 1 NODE 2 NUMMER </pre>
<pre> \xmlfilter {...} {...} 1 NODE 2 LPATH </pre>
<pre> \xmlfirst {...} {...} 1 NODE 2 LPATH </pre>
<pre> \xmlflush {...} * NODE </pre>
<pre> \xmlflushcontext {...} * NODE </pre>
<pre> \xmlflushdocumentsetups {...} {...} 1 NAME 2 SETUP </pre>
<pre> \xmlflushlinewise {...} * NODE </pre>
<pre> \xmlflushpure {...} * NODE </pre>
<pre> \xmlflushspacewise {...} * NODE </pre>
<pre> \xmlflushtext {...} * NODE </pre>
<pre> \xmlinclude {...} {...} {...} 1 NODE 2 LPATH 3 NAME </pre>
<pre> \xmlinclusion {...} * NODE </pre>
<pre> \xmlinclusions {...} * NODE </pre>
<pre> \xmlinfo {...} * NODE </pre>
<pre> \xmlinjector {...} * NAME </pre>
<pre> \xmlinlineprettyprint {...} {...} 1 NODE 2 mp lua xml parsed-xml nested tex context niciunul NAME </pre>
<pre> \xmlinlineprettyprinttext {...} {...} 1 NODE 2 mp lua xml parsed-xml nested tex context niciunul NAME </pre>

<pre>\xmlinlineverbatim {...} * NODE</pre>
<pre>\xmlinstalldirective {...} {...} 1 NAME 2 CSNAME</pre>
<pre>\xmllast {...} {...} 1 NODE 2 LPATH</pre>
<pre>\xmllastatt</pre>
<pre>\xmllastmatch</pre>
<pre>\xmllastpar</pre>
<pre>\xmlloadbuffer {...} {...} {...} 1 BUFFER 2 NAME 3 XMLSETUP</pre>
<pre>\xmlloaddata {...} {...} {...} 1 NAME 2 TEXT 3 XMLSETUP</pre>
<pre>\xmlloaddirectives {...} * FILE</pre>
<pre>\xmlloadfile {...} {...} {...} 1 NAME 2 FILE 3 XMLSETUP</pre>
<pre>\xmlloadonly {...} {...} {...} 1 NAME 2 FILE 3 XMLSETUP</pre>
<pre>\xmlmain {...} * NAME</pre>
<pre>\xmlmapvalue {...} {...} {...} 1 CATEGORY 2 NAME 3 TEXT</pre>
<pre>\xmlname {...} * NODE</pre>
<pre>\xmlnamespace {...} * NODE</pre>
<pre>\xmlnonspace {...} {...} 1 NODE 2 LPATH</pre>
<pre>\xmlpar {...} {...} 1 NODE 2 NAME</pre>

`\xmlparam {1.} {2.} {3.}`

- 1 NODE
- 2 LPATH
- 3 NAME

`\xmlpath {*.}`

- * NODE

`\xmlpos {*.}`

- * NODE

`\xmlposition {1.} {2.} {3.}`

- 1 NODE
- 2 LPATH
- 3 NUMMER

`\xmlprependdocumentsetup {1.} {2.}`

- 1 NAME
- 2 SETUP

`\xmlprependsetup {*.}`

- * SETUP

`\xmlprettyprint {1.} {2.}`

- 1 NODE
- 2 mp lua xml parsed-xml nested tex context niciunul NAME

`\xmlprettyprinttext {1.} {2.}`

- 1 NODE
- 2 mp lua xml parsed-xml nested tex context niciunul NAME

`\xmlprocessbuffer {1.} {2.} {3.}`

- 1 BUFFER
- 2 NAME
- 3 XMLSETUP

`\xmlprocessdata {1.} {2.} {3.}`

- 1 NAME
- 2 TEXT
- 3 XMLSETUP

`\xmlprocessfile {1.} {2.} {3.}`

- 1 NAME
- 2 FILE
- 3 XMLSETUP

`\xmlpure {1.} {2.}`

- 1 NODE
- 2 LPATH

`\xmlraw {*.}`

- * NODE

`\xmlrefatt {1.} {2.}`

- 1 NODE
- 2 NAME

`\xmlregistereddokumentsetups {1.} {2.}`

- 1 NAME
- 2 SETUP

<code>\xmlregisteredsetups</code>
<code>\xmlregisterns {...} {...}</code> 1 NAME 2 URL
<code>\xmlremapname {...} {...} {...} {...}</code> 1 NODE 2 LPATH 3 NAME 4 NAME
<code>\xmlremapnamespace {...} {...} {...}</code> 1 NODE 2 NAME 3 NAME
<code>\xmlremovedocumentsetup {...} {...}</code> 1 NAME 2 SETUP
<code>\xmlremovesetup {...}</code> * SETUP
<code>\xmlresetdocumentsetups {...}</code> * NAME
<code>\xmlresetinjectors</code>
<code>\xmlresetsetups {...}</code> * NAME
<code>\xmlsave {...} {...}</code> 1 NODE 2 FILE
<code>\xmlsetatt {...} {...} {...}</code> 1 NODE 2 NAME 3 TEXT
<code>\xmlsetAttribute {...} {...} {...} {...}</code> 1 NODE 2 LPATH 3 NAME 4 TEXT
<code>\xmlsetentity {...} {...}</code> 1 NAME 2 TEXT
<code>\xmlsetfunction {...} {...} {...}</code> 1 NODE 2 LPATH 3 LUAFUNCTION
<code>\xmlsetinjectors [...]*...]</code> * NAME

\xmlsetpar {...} {...} {...}

1 NODE
2 NAME
3 TEXT

\xmlsetparam {...} {...} {...} {...}

1 NODE
2 LPATH
3 NAME
4 TEXT

\xmlsetsetup {...} {...} {...}

1 NAME
2 LPATH
3 SETUP

\xmlsetup {...} {...}

1 NODE
2 SETUP

\xmlshow {...}

* NODE

\xmlsnippet {...} {...}

1 NODE
2 NUMBER

\xmlstrip {...} {...}

1 NODE
2 LPATH

\xmlstripnolines {...} {...}

1 NODE
2 LPATH

\xmlstripped {...} {...}

1 NODE
2 LPATH

\xmlstrippednolines {...} {...}

1 NODE
2 LPATH

\xmltag {...}

* NODE

\xmltexentity {...} {...}

1 NAME
2 TEXT

\xmltext {...} {...}

1 NODE
2 LPATH

\xmltobuffer {...} {...} {...}

1 NODE
2 LPATH
3 BUFFER

\xmltobufferverbose {...} {...} {...}

1 NODE
2 LPATH
3 BUFFER

```
\xmltofile {...} {...} {...}
```

```
1 NODE  
2 LPATH  
3 FILE
```

```
\xmlvalue {...} {...} {...}
```

```
1 CATEGORY  
2 NAME  
3 TEXT
```

```
\xmlverbatim {...}
```

```
* NODE
```

```
\xsplitstring \... {...}
```

```
1 CSNAME  
2 TEXT
```

```
\xypos {...}
```

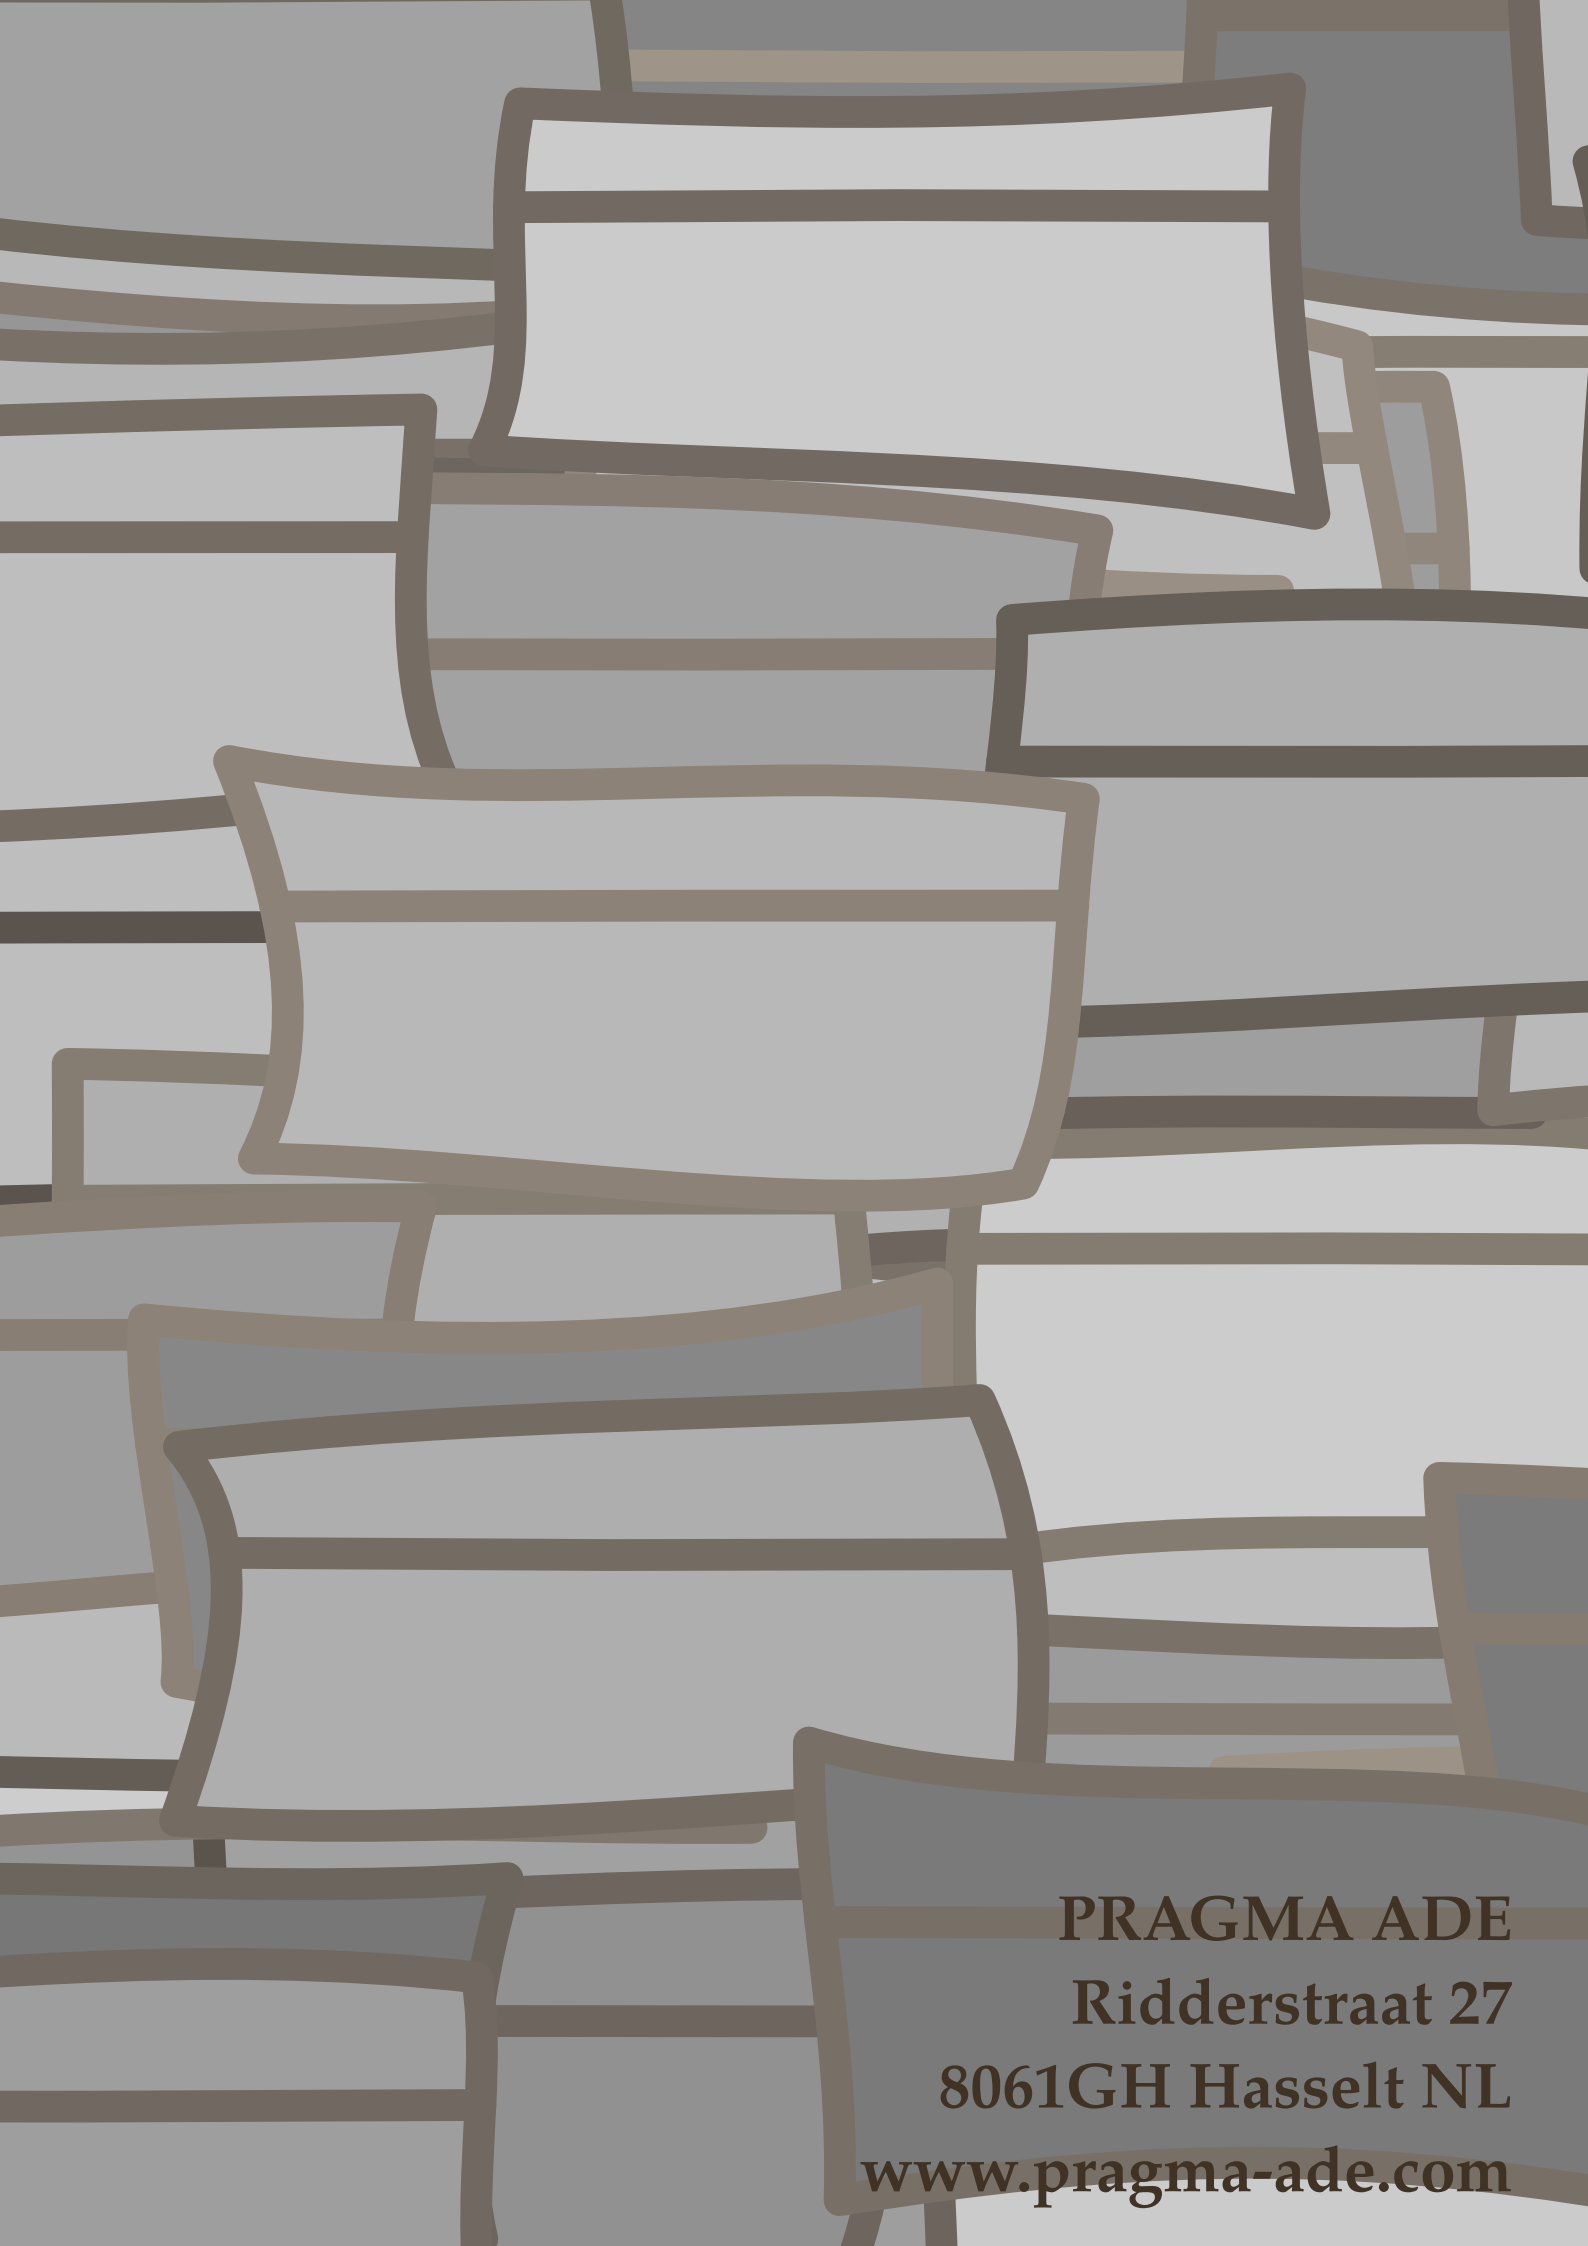
```
* NAME
```

```
\ZIDINSAPTAMANA {...}
```

```
* NUMBER
```

```
\zidinsaptamana {...}
```

```
* NUMBER
```

PRAGMA ADE
Ridderstraat 27
8061GH Hasselt NL
www.pragma-ade.com